


Type SJOOW 300V

EPDM/CPE

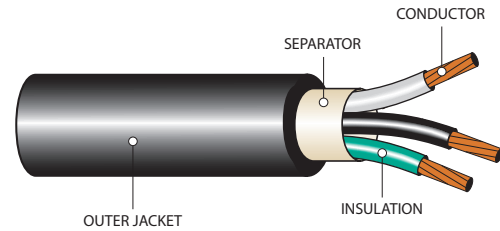

SPECIFICATIONS

- CSA FT2
- CSA C22.2 No. 49
- UL Flexible Cord - UL 62
- MSHA Approved
- RoHS Compliant

*Refer to CE Code for details

UL  FT2

CONSTRUCTION

Conductor: Annealed stranded bare copper

Insulation: Colour coded, 90°C flexible Ethylene Propylene Diene Monomer (EPDM)

Outer Jacket: -40°C to +90°C, sunlight and weather resistant Chlorinated Polyethylene (CPE), black

Options: Other coloured outer jacket and constructions available upon request

Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm.	in.	mm.	LB/MFT	KG/KM
01002-01-010	2	18	16/30	0.030	0.760	0.285	7.240	46	69
01002-02-010	3	18	16/30	0.030	0.760	0.305	7.750	60	89
01002-03-010	4	18	16/30	0.030	0.760	0.330	8.380	72	107
01002-04-010	2	16	26/30	0.030	0.760	0.310	7.870	56	83
01002-05-010	3	16	26/30	0.030	0.760	0.330	8.380	72	107
01002-06-010	4	16	26/30	0.030	0.760	0.365	9.270	89	132
01002-07-010	2	14	41/30	0.030	0.760	0.340	8.640	75	112
01002-08-010	3	14	41/30	0.030	0.760	0.370	9.400	100	149
01002-09-010	4	14	41/30	0.030	0.760	0.410	10.410	128	191
01002-12-010	2	12	65/30	0.030	0.760	0.410	10.410	108	161
01002-10-010	3	12	65/30	0.030	0.760	0.430	10.920	136	202
01002-11-010	4	12	65/30	0.030	0.760	0.475	12.070	177	263
01002-23-010	3	10	104/30	0.045	1.140	0.580	14.730	236	351
01002-24-010	4	10	104/30	0.045	1.140	0.655	16.640	296	441

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

Refer to CEC for Ampacity