


Type S00W 600V

EPDM/CPE

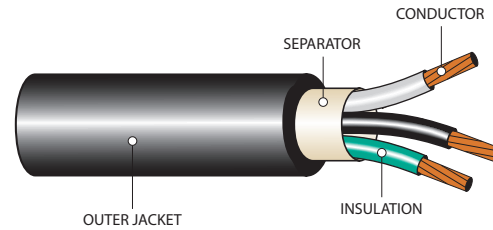

SPECIFICATIONS

- CSA FT2
- CSA C22.2 No. 49
- UL Flexible Cord - UL 62
- MSHA Approved
- RoHS Compliant

*Refer to CE Code for details

UL  FT2

CONSTRUCTION

Conductor: Annealed stranded bare copper

Insulation: Colour coded, 90°C flexible Ethylene Propylene Diene Monomer (EPDM)

Outer Jacket: -40°C to +90°C, sunlight and weather resistant Chlorinated Polyethylene (CPE), black

Options: Other coloured outer jacket and constructions available upon request

Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm.	in.	mm.	LB/MFT	KG/KM
01010-02-010	2	18	16/30	0.030	0.760	0.345	8.760	65	97
01010-03-010	3	18	16/30	0.030	0.760	0.365	9.270	80	119
01010-03-014	4	18	16/30	0.030	0.760	0.390	9.910	94	140
01010-04-010	2	16	26/30	0.030	0.760	0.370	9.400	77	115
01010-05-010	3	16	26/30	0.030	0.760	0.390	9.910	94	140
01010-06-010	4	16	26/30	0.030	0.760	0.420	10.670	114	170
01010-07-010	2	14	41/30	0.045	1.140	0.510	12.950	154	229
01010-08-010	3	14	41/30	0.045	1.140	0.535	13.590	171	255
01010-09-010	4	14	41/30	0.045	1.140	0.575	14.610	209	311
01010-10-010	2	12	65/30	0.045	1.140	0.570	14.480	168	250
01010-11-010	3	12	65/30	0.045	1.140	0.595	15.110	223	332
01010-12-010	4	12	65/30	0.045	1.140	0.650	16.510	276	411
01010-13-010	2	10	104/30	0.045	1.140	0.620	15.750	230	342
01010-14-010	3	10	104/30	0.045	1.140	0.660	16.760	289	430
01010-15-010	4	10	104/30	0.045	1.140	0.715	18.160	351	522
02010-17-010	3	8	133/29	0.060	1.520	0.840	21.330	450	670
02010-18-010	4	8	133/29	0.060	1.520	0.945	24.000	580	863
02010-20-010	3	6	133/27	0.060	1.520	0.980	24.890	637	948
02010-21-010	4	6	133/27	0.060	1.520	1.080	27.430	830	1235
01010-01-010	3	4	133/25	0.060	1.520	1.140	28.960	926	1378
02010-24-010	4	4	133/25	0.060	1.520	1.260	32.000	1145	1704
02010-28-010	3	2	133/23	0.060	1.520	1.330	33.780	1367	2034
02010-27-010	4	2	133/23	0.060	1.520	1.460	37.080	1699	2528

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

Refer to CEC for Ampacity