


Ultraflex Welding Cable Class M 600V

EPDM

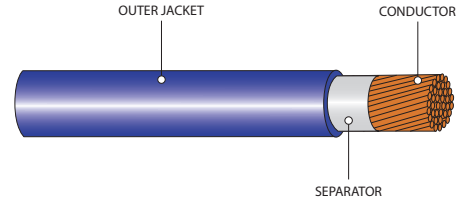

SPECIFICATIONS

- RoHS Compliant

CONSTRUCTION

Conductor: Stranded bare annealed copper - class M

Outer Jacket: -50°C to +105°C, high grade Ethylene Propylene Diene Monomer (EPDM), blue

Voltage: 600V intermittent

Option: Other coloured outer jacket and constructions available upon request

34 AWG

Part Number	AWG Size		Approximate Diameter		Net Weight	
	Cond.	Stranding	in.	mm.	LB/MFT	KG/KM
08030-03-040	4	1064/34	0.439	11.15	220	327
08030-05-040	2	1672/34	0.511	12.98	286	426
08030-06-040	1	2109/34	0.556	14.12	350	521
08030-07-040	1/0	2646/34	0.580	14.73	432	643
08030-08-040	2/0	3330/34	0.660	16.76	550	818

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.

Refer to CEC for Ampacity