


Ultraflex -60°C Extension Cord Set
SJTOW 300V (with LED light)

PVC/PVC

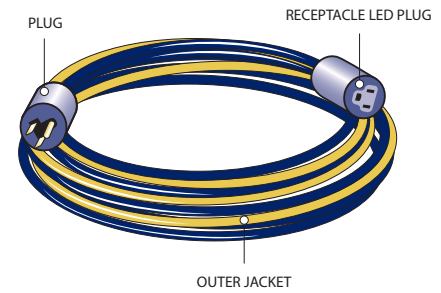

SPECIFICATIONS

- CSA FT2
 - RoHS Compliant
- UL  FT2

CONSTRUCTION

- Conductor:** Stranded soft bare copper
- Insulation:** Lead free Polyvinyl Chloride (PVC), full extrusion (fillerless)
- Outer Jacket:** -60°C to 60°C, flame-retardant (FR) Polyvinyl Chloride (PVC), blue with yellow stripe
- Ends:** NEMA 5-15P and 5-15R molded ends
- Option:** Other coloured outer jackets, constructions and lengths available upon request

SINGLE LED									
Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight (LB/EA)	Lengths (ft)
		Cond.	Stranding	in.	mm.	in.	mm.		
01096-00-047	3	14	41	0.030	0.762	0.370	9.398	5.0	15
01096-01-047	3	14	41	0.030	0.762	0.370	9.398	8.3	25
01096-02-047	3	14	41	0.030	0.762	0.370	9.398	16.5	50
01096-03-047	3	14	41	0.030	0.762	0.370	9.398	33.0	100
01096-17-047	3	12	65	0.045	1.143	0.445	11.303	20.0	50
01096-18-047	3	12	65	0.045	1.143	0.445	11.303	40.0	100

TRI-TAP LED									
Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight (LB/EA)	Lengths (ft)
		Cond.	Stranding	in.	mm.	in.	mm.		
01096-04-047-3-2FT	3	14	41	0.030	0.762	0.370	9.398	0.5	2
01096-02-047-3	3	14	41	0.030	0.762	0.370	9.398	16.8	50
01096-03-047-3	3	14	41	0.030	0.762	0.370	9.398	33.3	100
01096-17-047-3	3	12	65	0.030	0.762	0.445	11.303	20.3	50
01096-18-047-3	3	12	65	0.030	0.762	0.445	11.303	40.3	100

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

Refer to CEC for Ampacity