


## Ultraflex -60°C Extension Cord Set STOW 600V (with LED light)

PVC/PVC

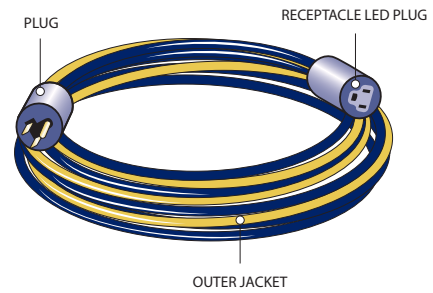

### SPECIFICATIONS

- CSA FT2
  - RoHS Compliant
- UL  FT2

### CONSTRUCTION

- Conductor:** Stranded soft bare copper
- Insulation:** Lead free Polyvinyl Chloride (PVC), full extrusion (fillerless)
- Outer Jacket:** -60°C to 60°C, flame-retardant (FR) Polyvinyl Chloride (PVC), blue with yellow stripe
- Ends:** NEMA 5-15P and 5-15R molded ends
- Option:** Other coloured outer jackets, constructions and lengths available upon request

### SINGLE LED

Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight (LB/EA)	Lengths (ft)
		Cond.	Stranding	in.	mm.	in.	mm.		
01096-22-047	3	12	65	0.045	1.143	0.609	15.469	32	50
01096-23-047	3	12	65	0.045	1.143	0.609	15.469	64	100

### TRI-TAP LED

Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight (LB/EA)	Lengths (ft)
		Cond.	Stranding	in.	mm.	in.	mm.		
01096-25-047-3-2FT	3	12	65	0.045	1.143	0.609	15.469	1	2
01096-22-047-3	3	12	65	0.045	1.143	0.609	15.469	32	50
01096-23-047-3	3	12	65	0.045	1.143	0.609	15.469	64	100

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.  
Specifications are subject to change without prior notice.

Refer to CEC for Ampacity