


## Single Wall Heat Shrink Tube

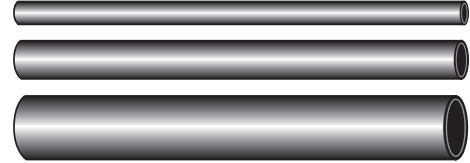

### SPECIFICATIONS

UL 

MIL-DTL-23053/5, Class 1 & 2

### APPLICATIONS

- Multi-purpose

### CONSTRUCTION

**Material:** Thin wall crosslinked polyolefin, black

**Temp:** -55°C to 135°C

**Shrink Temp:** 120°C

**Length:** 4 feet

**Feature:** Resistant to most common fluids and solvents

**Option:** Other colours are available upon request

Part Number	Sizes (in.)
18-CPX100-1/8-010	1/8
18-CPX100-3/16-010	3/16
18-CPX100-1/4-010	1/4
18-CPX100-3/8-010	3/8
18-CPX100-1/2-010	1/2
8-CPX100-3/4-010	3/4
18-CPX100-1-010	1
18-CPX100-11/2-010	1-1/2
18-CPX100-2-010*	2

\*Non-stock item

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.  
Specifications are subject to change without prior notice