

Fire Alarm Cable Shielded, Unjacketed, Armoured

PVC, AIA

SPECIFICATIONS

- CSA FT4
- FAS 105



CONSTRUCTION

Conductor: Solid Bare Copper

Insulation: Polyvinyl Chloride (PVC)

Armour: Aluminum Interlocked Armour (AIA)


Shield: 100% Aluminum Foil Shield

Drain Wire: Solid Tinned Copper Drain

Cable Temperature: -20 °C TO 105°C

Voltage: 300V

Options: Silver colour and non armoured or steel armour available upon request

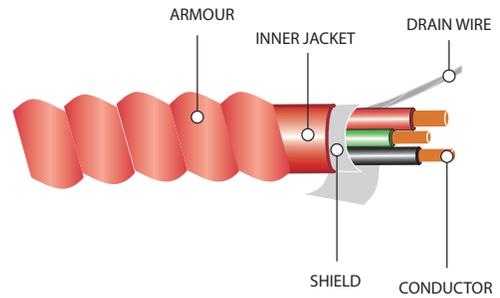

Part Number	AWG Size	No. of Conductors	Stranding	Insulation Thickness (in.)	Approximate Diameter (in.)	Net Weight	
						LB/MFT	KG/KM
26323-03-035RED	18	3	Solid	0.015	0.402	69	102
26323-05-035RED	18	5	Solid	0.015	0.450	70	105

Refer to CEC for Ampacity

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.