


## T90 Nylon Cable 600V

PVC/Nylon

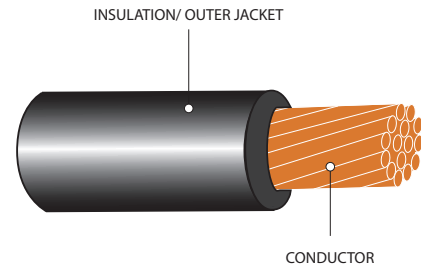

### SPECIFICATIONS

- CSA FT1
- CSA C22.2 No. 75
- UL 83

\*Refer to CE Code for details



### CONSTRUCTION

**Conductor:** Annealed solid or stranded, soft copper

**Insulation:** Heat and moisture resistant Polyvinyl Chloride (PVC) and Nylon covering with a maximum operating temperature of 90°C (60°C when exposed to oil)

**Options:** Other coloured outer jacket and constructions available upon request

Part Number	AWG Size	Insulation Thickness		Jacket Thickness		Approximate Diameter		Net Weight	
		in.	mm.	in.	mm.	in.	mm.	LB/MFT	KG/KM
11009-01-010	14 (1)	0.015	0.380	0.004	0.100	0.102	2.590	15	23
11009-02-010	12 (1)	0.015	0.380	0.004	0.100	0.119	3.020	23	34
11009-03-010	10 (1)	0.020	0.510	0.004	0.100	0.150	3.810	37	55
11009-04-010	14 (19)	0.015	0.380	0.004	0.100	0.109	2.770	16	23
11009-05-010	12 (19)	0.015	0.380	0.004	0.100	0.128	3.250	24	36
11009-06-010	10 (19)	0.020	0.510	0.004	0.100	0.161	4.090	38	57
11009-07-010	8 (19)	0.030	0.760	0.005	0.130	0.213	5.410	63	93
11009-08-010	6 (19)	0.030	0.760	0.005	0.130	0.249	6.320	95	141
11009-09-010	4 (19)	0.040	1.020	0.006	0.150	0.318	8.080	152	227
11009-10-010	3 (19)	0.040	1.020	0.006	0.150	0.346	8.790	189	281
11009-11-010	2 (19)	0.040	1.020	0.006	0.150	0.378	9.600	234	349
11009-12-010	1 (19)	0.050	1.270	0.007	0.180	0.435	11.000	299	446
11009-13-010	1/0 (19)	0.050	1.270	0.007	0.180	0.474	12.000	372	553
11009-14-010	2/0 (19)	0.050	1.270	0.007	0.180	0.518	13.200	462	687
11009-15-010	3/0 (19)	0.050	1.270	0.007	0.180	0.568	14.400	575	856
11009-16-010	4/0 (19)	0.050	1.270	0.007	0.180	0.624	15.800	718	1068
11009-17-010	250 (37)	0.060	1.520	0.008	0.200	0.694	17.600	851	1266
11009-19-010	350 (37)	0.060	1.520	0.008	0.200	0.797	20.200	1174	1747
11009-21-010	500 (37)	0.060	1.520	0.008	0.200	0.926	23.500	1655	2462

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.  
Specifications are subject to change without prior notice.

Refer to CEC for Ampacity