


XLPE Insulated Overall Shielded 18,16 & 14 AWG 600V

XLPE/PVC

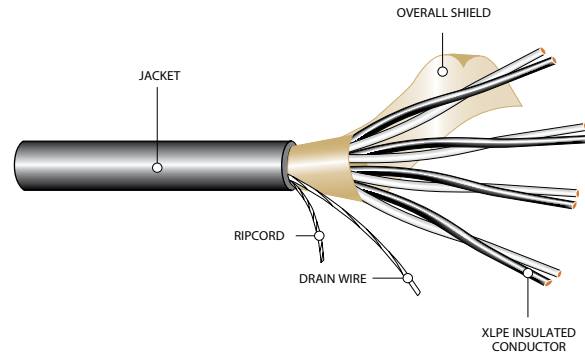

SPECIFICATIONS

- CSA C22.2 No. 230
- CSA C22.2 No. 239
- CSA C22.2 No. 38
- CSA FT4 rated (70,000 BTU Vertical Flame Test)

*refer to CE Code for details



CONSTRUCTION

Conductor: 7 strand tinned Class B concentric copper
Insulation: Flame retardant (FR) Cross-Linked Polyethylene (XLPE), Type RW90
Overall Shield: Overall aluminum/polyester tape shield with 7 strand drain wire
Outer Jacket: Low-temperature (-40°C), flame and sunlight resistant Polyvinyl Chloride (PVC), black
Options: Tinned copper braid shielded cables are available upon request
 Polyvinyl Chloride (PVC) insulation
 Other coloured outer jacket and constructions available upon request
 600V
 Individual and overall shields

PAIRS 16 AWG

Part Number	No. of Pairs	Insulation Thickness (in.)	Approximate Diameter (in.)	Net Weight		Min. Bend Radius (in.)
				LB/MFT	KG/KM	
C6-1124-1601-11	1	0.030	0.058	51	76	4.25
C6-1324-1602-11	2	0.030	0.396	87	130	4.75
C6-1324-1604-11	4	0.030	0.649	207	307	6
C6-1324-1608-11	8	0.030	0.871	341	508	7

PAIRS 14 AWG

C6-1124-1401-11	1	0.030	0.367	66	98	4.50
-----------------	---	-------	-------	----	----	------

TRIADS 18 AWG

Part Number	No. of Pairs	Insulation Thickness (in.)	Approximate Diameter (in.)	Net Weight		Min. Bend Radius (in.)
				LB/MFT	KG/KM	
C6-1134-1801-11	1	0.030	0.333	55	82	4

TRIADS 16 AWG

C6-1134-1601-11	1	0.030	0.356	69	102	4.50
C6-1334-1604-11	4	0.030	0.058	261	389	9
C6-1324-1612-11	12	0.030	0.058	537	799	12.75
C6-1324-1624-11	24	0.030	0.058	1012	1506	18

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice

* See page 20 for corresponding connectors.