


Ultraflex Speaker Wire

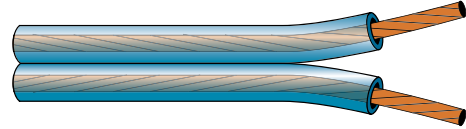

APPLICATIONS

- Audio
- Automotive

CONSTRUCTION

Conductor: Two bare copper conductors
Insulation: Clear Blue Polyvinyl Chloride (PVC), Parallel Construction

Part Number	Conductor			Approx. Insulation Thickness (in.)	Approx. Diameter (in.)	Approx Weight (LB/MFT)
	NO.	AWG Size	Stranding			
01052-03-040	2	20	10 x 30	0.020	.078 x .156	10
01052-04-040	2	18	16 x 30	0.025	.109 x .214	21
01052-05-040	2	16	26 x 30	0.025	.124 x .242	25
01052-06-040	2	14	41 x 30	0.025	.129 x .248	19
01052-07-041	2	12	65 x 30	0.030	.166 x .356	31

*Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
 Specifications are subject to change without prior notice*