


VitaLink MC 2-Hour Fire Rated Cable

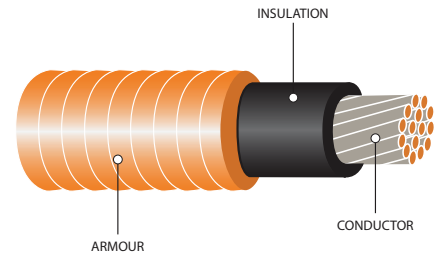

SPECIFICATIONS

- CSA RC90
- 2HR Fire Rated Per ULC S139 with hose stream, horizontal and vertical applications

*Refer to CE Code for details



CONSTRUCTION

- Conductor:** Annealed copper conductor
- Insulation:** Ceramifiable silicon insulation
- Armour:** Continuously welded and corrugated copper armour
- Cable Temperature:** 90°C Wet
- Voltage:** 600V
- Options:** Connectors and brass plates available upon request

Part Number	AWG Size	Number of Conductors	Insulation Thickness (in.)	Approximate Diameter (in.)	Net Weight	
					LB/MFT	KG/KM
26-VM03010-500	10	3	0.060	0.940	670	997
26-VM03008-500	8	3	0.070	1.040	820	1220
26-VM03006-500	6	3	0.070	1.160	1000	1488
26-VM04006-500	6	4	0.070	1.220	1160	1726
26-VM03004-500	4	3	0.070	1.240	1140	1696
26-VM03003-500	3	3	0.070	1.300	1410	2098
26-VM04003-500	3	4	0.070	1.410	1700	2529
26-VM04001-500	1	4	0.090	1.730	2550	3794
26-VM012X0-500	2/0	1	0.140	1.040	910	1354
26-VM013X0-500	3/0	1	0.140	1.080	1065	1585
26-VM033X0-500	3/0	3	0.140	1.920	3130	4657
26-VM013X0-500	4/0	1	0.140	1.160	1220	1815
26-VM01350-500	350	1	0.155	1.350	2000	2976
26-VM03350-500	350	3	0.105	2.480	5620	8362

Refer to CEC for Ampacity

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.