


TWU Cable 600V

PVC

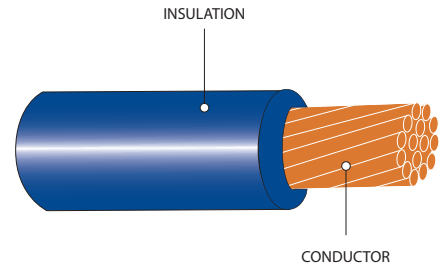

SPECIFICATIONS

- CSA FT1
- CSA C22.2 No. 75-03

*Refer to CE Code for details



CONSTRUCTION

Conductor: Annealed solid or stranded, soft copper

Insulation: Flame-retardant (FR), low-temperature, moisture resistant Polyvinyl Chloride (PVC)

Options: Other coloured outer jacket and constructions available upon request

Part Number	AWG Size	Insulation Thickness		Approximate Diameter		Net Weight	
		in.	mm.	in.	mm.	LB/MFT	KG/KM
11006-01-010	14 (1)	0.060	1.520	0.190	4.700	26	39
11006-06-010	10 (7)	0.060	1.520	0.210	5.400	37	55
11006-07-010	8 (7)	0.080	2.030	0.310	7.800	85	126
11006-08-010	6 (7)	0.080	2.030	0.340	8.700	121	180
11006-09-010	4 (7)	0.080	2.030	0.390	9.900	177	263
11006-11-010	2 (7)	0.080	2.030	0.450	11.400	263	392
11006-13-010	1/0 (19)	0.095	2.410	0.550	13.900	407	606
11006-14-010	2/0 (19)	0.095	2.410	0.590	15.000	506	753
11006-16-010	4/0 (19)	0.095	2.410	0.700	17.600	764	1137

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.

Refer to CEC for Ampacity