


Fire Alarm Cable Non-Shielded, Non-Armoured

PVC, FT4

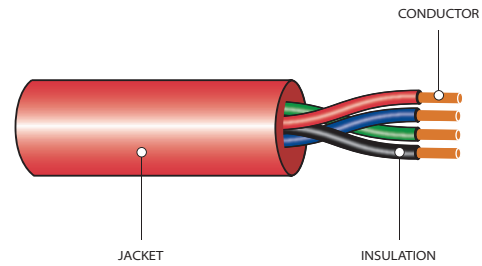

SPECIFICATIONS

- CSA, FT4
- FAS105

*Refer to CE Code for details



CONSTRUCTION

Conductor: Solid Bare Copper

Insulation: Polyvinyl Chloride (PVC)

Outer Jacket Material: Polyvinyl Chloride (PVC)

Cable Temperature: -20 °C TO 105°C

Voltage: 300V

Options: Other jacket colours, sizes and armours available upon request

Part Number	AWG Size	Number of Conductors	Stranding	Insulation Thickness (in.)	Approximate Diameter (in.)	Net Weight	
						LB/MFT	KG/KM
26313-02-030	18	2	Solid	0.015	0.209	27	40
26313-03-030	18	3	Solid	0.015	0.224	37	55
26313-04-030	18	4	Solid	0.015	0.238	45	67
26313-05-030	18	5	Solid	0.015	0.255	53	79
26313-06-030	18	6	Solid	0.015	0.271	61	91
26313-08-030	18	8	Solid	0.015	0.302	77	115
26313-09-030	18	9	Solid	0.015	0.316	83	123
26313-10-030	18	10	Solid	0.015	0.330	94	140
26313-11-030	18	11	Solid	0.015	0.340	99	147
26313-15-030	18	15	Solid	0.015	0.403	140	208
26313-20-030	18	20	Solid	0.015	0.454	181	269
26313-21-030	18	21	Solid	0.015	0.460	185	275
26313-30-030	18	30	Solid	0.015	0.535	257	382
26314-02-030	16	2	Solid	0.015	0.235	34	51
26314-03-030	16	3	Solid	0.015	0.251	44	65
26314-04-030	16	4	Solid	0.015	0.272	55	82
26314-05-030	16	5	Solid	0.015	0.294	69	103
26314-07-030	16	7	Solid	0.015	0.325	90	134
26315-02-030	14	2	Solid	0.015	0.264	46	68
26315-03-030	14	3	Solid	0.015	0.283	62	92
26315-04-030	14	4	Solid	0.015	0.308	79	118
26315-05-030	14	5	Solid	0.015	0.335	96	143

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

Refer to CEC for Ampacity