

CIRCUIT BREAKER SIZE S2. FOR MOTOR PROTECTION, CLASS 10, A-RELEASE 18...25A, N-RELEASE 325A, SCREW TERMINAL, STANDARD BREAKING CAPACITY



Figure similar

| | |
|---|----------------------|
| product brand name | SIRIUS |
| Product designation | 3RV2 circuit breaker |
| General technical data: | |
| Size of the circuit-breaker | S2 |
| Size of contactor can be combined company-specific | S2 |
| Product extension | |
| • Auxiliary switch | Yes |
| Power loss [W] total typical | 12 W |
| Insulation voltage with degree of pollution 3 rated value | 690 V |
| Surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for safe isolation | |
| • in networks with grounded star point between main and auxiliary circuit | 400 V |
| • in networks with grounded star point between main and auxiliary circuit | 400 V |
| Protection class IP | |
| • on the front | IP20 |

| | |
|---|--|
| • of the terminal | IP00 |
| Shock resistance | |
| • acc. to IEC 60068-2-27 | 25g / 11 ms Sinus |
| Mechanical service life (switching cycles) | |
| • of the main contacts typical | 50 000 |
| • of auxiliary contacts typical | 50 000 |
| Electrical endurance (switching cycles) | |
| • typical | 50 000 |
| Protection against electrical shock | finger-safe when touched vertically from front acc. to IEC 60529 |
| Equipment marking acc. to DIN EN 81346-2 | Q |

Ambient conditions:

| | |
|--|----------------|
| Installation altitude at height above sea level maximum | 2 000 m |
| Ambient temperature | |
| • during operation | -20 ... +60 °C |
| • during storage | -50 ... +80 °C |
| • during transport | -50 ... +80 °C |
| Temperature compensation | -20 ... +60 °C |
| Relative humidity during operation | 10 ... 95 % |

Main circuit:

| | |
|---|--------------|
| Number of poles for main current circuit | 3 |
| Adjustable pick-up value current of the current-dependent overload release | 18 ... 25 A |
| Operating voltage | |
| • rated value | 690 V |
| • at AC-3 rated value maximum | 690 V |
| Operating frequency rated value | 50 ... 60 Hz |
| Operating current rated value | 25 A |
| Operating current | |
| • at AC-3 | |
| — at 400 V rated value | 25 A |
| Operating power | |
| • at AC-3 | |
| — at 230 V rated value | 5 500 W |
| — at 400 V rated value | 11 000 W |
| — at 500 V rated value | 15 000 W |
| — at 690 V rated value | 22 000 W |
| Operating frequency | |
| • at AC-3 maximum | 15 1/h |

Protective and monitoring functions:

| | |
|-------------------|----------|
| Trip class | Class 10 |
|-------------------|----------|

| | |
|--|---|
| Design of the overload release | thermal |
| Operational short-circuit current breaking capacity (Ics) at AC | |
| <ul style="list-style-type: none"> • at 240 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value | <p>100 A</p> <p>30 kA</p> <p>6 kA</p> <p>3 kA</p> |
| Maximum short-circuit current breaking capacity (Icu) | |
| <ul style="list-style-type: none"> • at AC at 240 V rated value • at AC at 400 V rated value • at AC at 500 V rated value • at AC at 690 V rated value | <p>100 kA</p> <p>65 kA</p> <p>12 kA</p> <p>5 kA</p> |

UL/CSA ratings:

| | |
|---|--|
| Full-load current (FLA) for three-phase AC motor | |
| <ul style="list-style-type: none"> • at 480 V rated value • at 600 V rated value | <p>25 A</p> <p>25 A</p> |
| Yielded mechanical performance [hp] | |
| <ul style="list-style-type: none"> • for single-phase AC motor <ul style="list-style-type: none"> — at 110/120 V rated value — at 230 V rated value • for three-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value | <p>2 hp</p> <p>5 hp</p> <p>7.5 hp</p> <p>10 hp</p> <p>20 hp</p> <p>25 hp</p> |

Short-circuit protection

| | |
|--|---|
| Design of the short-circuit trip | magnetic |
| Design of the fuse link for IT network for short-circuit protection of the main circuit | |
| <ul style="list-style-type: none"> • at 240 V • at 400 V • at 500 V • at 690 V | <p>none required</p> <p>100</p> <p>80</p> <p>63</p> |

Installation/ mounting/ dimensions:

| | |
|--------------------------|--|
| Mounting position | any |
| Mounting type | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 |
| Height | 140 mm |
| Width | 55 mm |
| Depth | 149 mm |
| Required spacing | |

| | |
|------------------------------|-------|
| • with side-by-side mounting | |
| — forwards | 0 mm |
| — Backwards | 0 mm |
| — upwards | 50 mm |
| — downwards | 50 mm |
| — at the side | 0 mm |
| • for grounded parts | |
| — forwards | 0 mm |
| — Backwards | 0 mm |
| — upwards | 50 mm |
| — at the side | 10 mm |
| — downwards | 50 mm |
| • for live parts | |
| — forwards | 0 mm |
| — Backwards | 0 mm |
| — upwards | 50 mm |
| — downwards | 50 mm |
| — at the side | 10 mm |

Connections/ Terminals:





| | |
|--|--|
| Product function | |
| • removable terminal for auxiliary and control circuit | No |
| Type of electrical connection | |
| • for main current circuit | screw-type terminals |
| Arrangement of electrical connectors for main current circuit | Top and bottom |
| Type of connectable conductor cross-sections | |
| • for main contacts | |
| — single or multi-stranded | 2x (1 ... 25 mm ²), 1x (1 ... 35 mm ²) |
| — finely stranded with core end processing | 2x (1 ... 16 mm ²), 1x (1 ... 25 mm ²) |
| • at AWG conductors for main contacts | 2x (18 ... 3), 1x (18 ... 2) |
| Tightening torque | |
| • for main contacts with screw-type terminals | 3 ... 4.5 N·m |
| Design of screwdriver shaft | Diameter 5 to 6 mm |
| Design of the thread of the connection screw | |
| • for main contacts | M6 |

Safety related data:

| | |
|--|-------|
| B10 value | |
| • with high demand rate acc. to SN 31920 | 5 000 |
| Proportion of dangerous failures | |
| • with low demand rate acc. to SN 31920 | 40 % |

| | |
|--|--------|
| <ul style="list-style-type: none"> with high demand rate acc. to SN 31920 | 50 % |
| Failure rate [FIT] | |
| <ul style="list-style-type: none"> with low demand rate acc. to SN 31920 | 50 FIT |
| T1 value for proof test interval or service life acc. to IEC 61508 | 10 y |
| Display version | |
| <ul style="list-style-type: none"> for switching status | Handle |

Certificates/approvals

| General Product Approval | Declaration of Conformity | Test Certificates |
|--|---|---|
|  CCC |  CSA |  UL |
| |  EG-Konf. | spezielle Prüfbescheinigung n |
| | | Typprüfbescheinigung/Werkszeugnis |

| other | Railway |
|-----------------------------------|--|
| Umweltbestätigung | Schwingen/Schocke n |
| Bestätigungen | |

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV20314DA10>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV20314DA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV20314DA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV20314DA10&lang=en

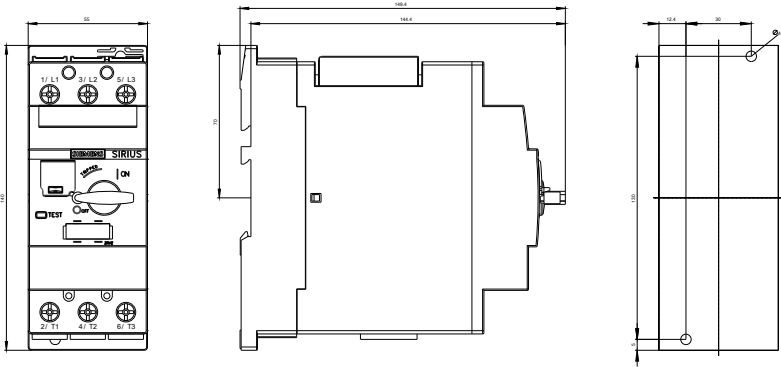

last modified:

09.06.2016