



MARCUS

Marcus Transformer LTD
 Phone: 1-800-267-7376
 Fax: 1-866-205-7526
 Email: Info@marcustransformer.com

TECHNICAL DATA MODEL:MTH 30A1


3-PHASE ISOLATING EFFICIENT TRANSFORMER

DESCRIPTION	
Type	DRY TYPE DISTRIBUTION (ANN)
KVA	30
Primary (Volts)	600
Secondary (Volts)	208Y / 120
Phase	3
Enclosure	NEMA 1
Impedance (%z)	3.8
Insulation Class	220°C
Temperature Rise	150°C
Frequency	60Hz
Weight (LBS/KG)	350 / 159
Connection	Dyn1(TT-1)
BIL.	10KV

PERFORMANCE	
No load loss	110W
Total loss	800W
Noise level	45dB

EFFICIENCY			
			Efficiency = 98.23% (As per NRCAN 2019 and DOE 2016)

Primary connectors per phase : #14-#4
Secondary connectors per phase: #6-250MCM

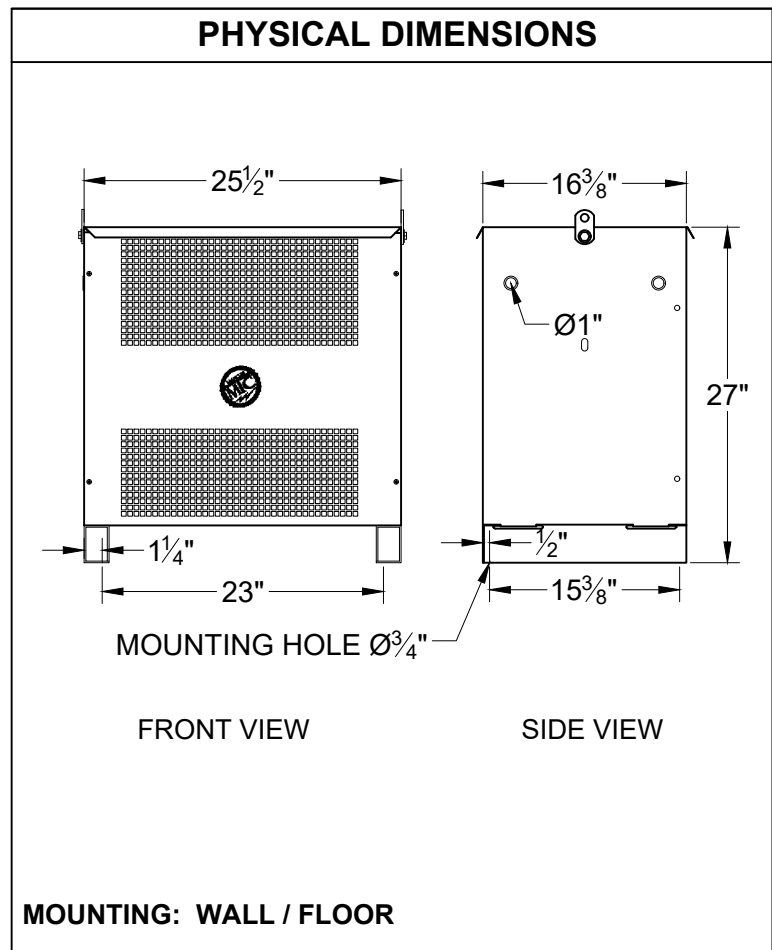

FEATURES:

- Anti-vibration pads installed between the core/coil and the enclosure
- Ground lug provided
- Leads brought-up and solidly positioned into separate terminal boards
- CSA enclosure: ventilated painted ASA 61gray
- Transformer meets the premium efficiency values as per NRCAN 2019/DOE 2016
- Copper ground strap between core/coil and enclosure
- CSA certified
- Copper windings

Customer / PO	
Project	
Engineer	
Contractor	
Revision Date	

COMMENTS