



## Beam clamps


Beam clamps for mounting channel

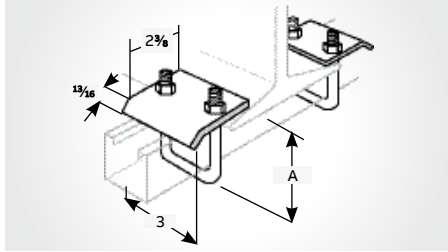


01

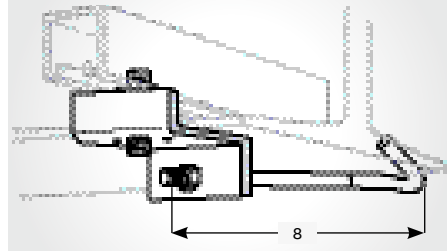


02

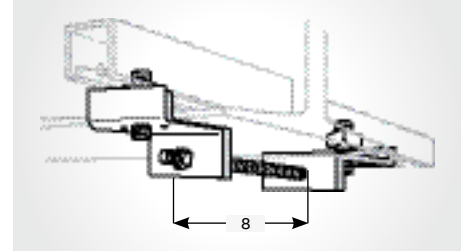


03

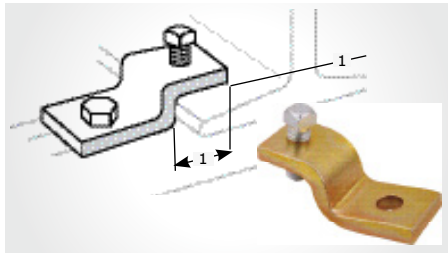


04

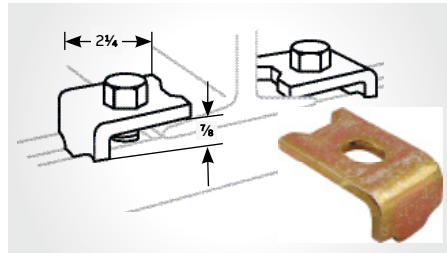


05

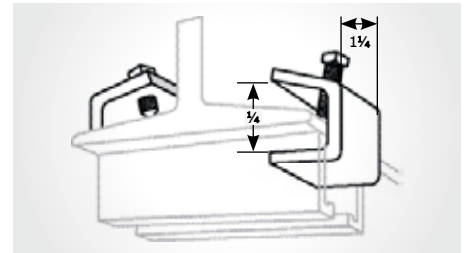


06

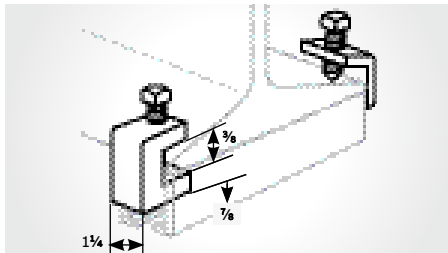

07

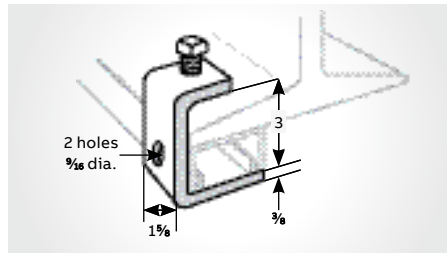

08

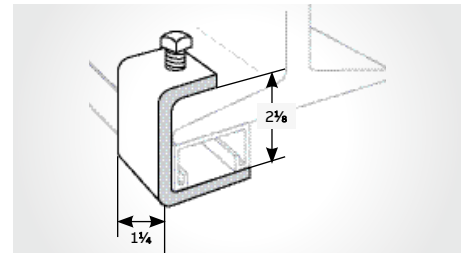

09

**01 U501, U502**

Furnished complete.  
Design load  
U501 : 2,150 lb  
U502 : 3,000 lb

- \*Finishes
- HDG
  - EG
  - GoldGalv®
  - SS6C

Cat. no.	For channel		Size	Wt./C lb
			(in.)	
U501*	A1200	A1400	3 3/16	90
	B1200	B1400	3 3/16	90
	C1200	B1402	3 3/16	90
U502*	A1202	A1402	4 13/16	100
	C1202	H1200	4 13/16	100

**02 U504**

U504HDG  
U504EG  
U504  
U504SS6  
Can be used with all channels.  
Wt./C 140 lb

**03 U505**

U505HDG  
U505EG  
U505  
Can be used with all channels.  
Wt./C 270 lb

**04 U510**

U510HDGC  
U510EG  
U510  
U510SS6

Design load/lb	Channel
1,000	A-1200
800	A-1400

1/2 in. x 1 1/2 in. set screw included.  
Order separately one 1/2 in. x 1 1/2 in. hex head cap screw and 1/2 in. channel nut.  
Wt./C 75 lb

**05 512U**

512UHDG  
512UEG  
512U

Design load/lb	Channel
1,000	A-1200
800	A-1400

Order separately one 1/2 in. x 1 1/2 in. hex head cap screw and 1/2 in. channel nut.  
Wt./C 26 lb

**06 U514**

U514HDGC  
U514EG  
U514  
U514SS6  
3/8 in. x 1 1/2 in. set screw included.  
Design load 750 lb/pair  
Wt./C 40 lb

**07 U514-A**

U514-AHDGC  
U514-AEG  
U514-A  
U514-ASS6  
1/2 in. x 1 1/2 in. set screw included.  
Design load 1,650 lb/pair  
Wt./C 59 lb

**08 U515**

U515HDGC  
U515EG  
U515  
U515SS6  
For all A series channel.  
1/2 in. x 1 1/2 in. set screw included.  
Design load 800 lb  
Wt./C 95 lb

**09 U515B**

U515BHDG  
U515BEG  
U515B  
U515BSS6  
For all B series channel.  
1/2 in. x 1 1/2 in. set screw included.  
Design load 800 lb  
Wt./C 91 lb


**Materials**

HDG(C)	Hot-dipped galvanized
EG(C)	Electrogalvanized
(No suffix)	GoldGalv®
SS6(C)	Stainless steel 316


All dimensions shown are in in.

## Beam clamps


Beam clamps for mounting channel

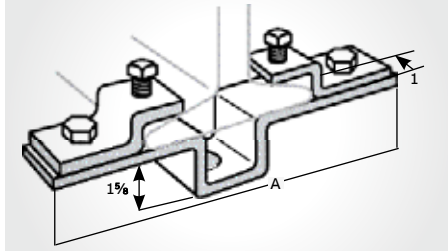


01

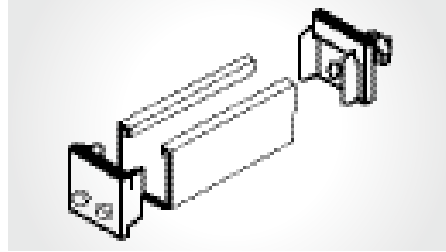


02

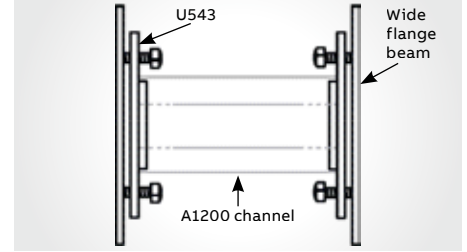

03

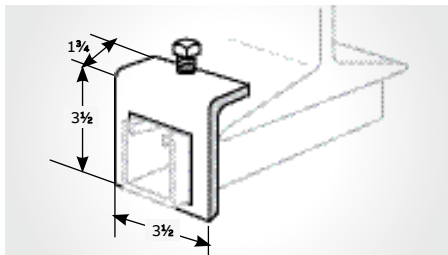

04

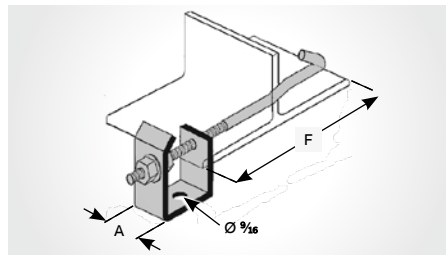

05

01 U520, U521, U522

\*Finishes  
• GoldGalv®

Cat. no.	Flange Width	A	Wt./C lb	Design load lb/ea
U520*	2 3/8–4 1/2	8 3/4	328	2,000
U521*	3 3/4–5 3/4	10	343	1,300
U522*	5 5/8–7 5/8	11 5/8	353	900

Nuts, cap screws and set screws included.

02 U544 Single adjusting screw end cap set

U544EG  
Should be ordered as one set.  
Wt./C 39 lb

03 U543 Adjusting screw end caps

U543HDG  
U543EG  
U543  
Should be ordered in multiples of two (2).  
Wt./C 44 lb

04 A597

\*Finishes  
• HDGC  
• SS6C

Cat. no.	Channel series		Wt./C lb	Design load lb/ea
	A	F		
A597*	A		108	800

05 U570-1, U570-2

\*Finishes  
• HDGC

Cat. no.	A (in.)	F (in.)	Wt./C	Design
			lb	load lb/ea
U570-1*	1 1/2	4 to 9	240	800
U570-2*	1 1/2	7 to 17	300	800


**Materials**

HDG(C)	Hot-dipped galvanized
EG(C)	Electrogalvanized
(No suffix)	GoldGalv®
SS6(C)	Stainless steel 316


All dimensions shown are in in.

# Beam clamps


## Beam clamps for hanging rod

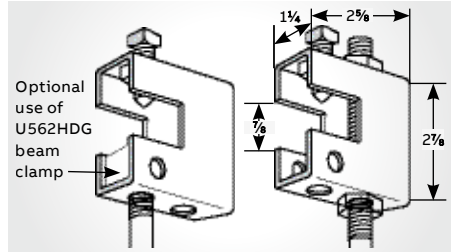


01

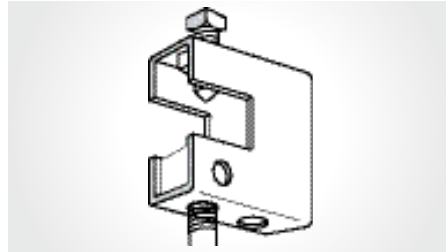


02

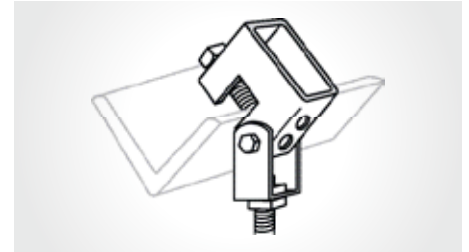


03

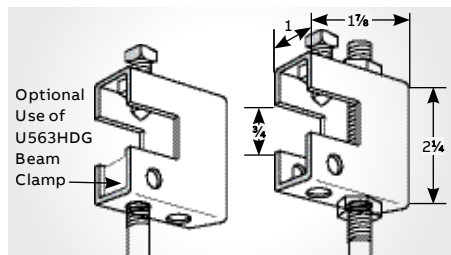


04

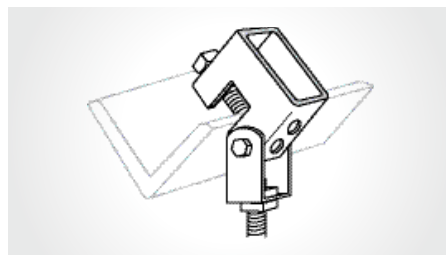

05

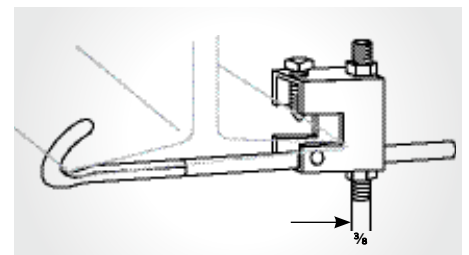

06

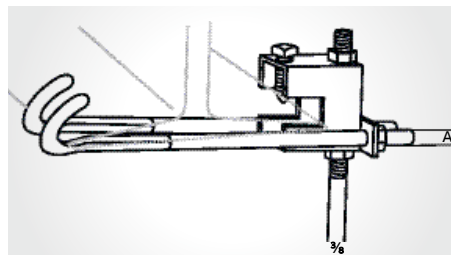

07

**01 U562 Beam clamp**  
 U562HDG  
 U562EG  
 U562  
 E146 square nut  
 order separately.  
 1/2 in. set screw  
 included.

Rod size (in.)	Wt./C lb	Design load lb/ea
1/2	80	800

For 20° swivel application use ES-145-1/2 nut. 1/2 in. set screw included.

Rod size (in.)	Wt./C lb	Design load lb/ea
1/2	80	500

**02 UM562 Beam clamp**  
 UM562HDGC  
 UM562EG  
 UM562  
 UM562SS6  
 E146 square nut  
 order separately.  
 1/2 in. set screw  
 included.

Rod size (in.)	Wt./C lb	Design load lb/ea
1/2	100	1,200

For 20° swivel application use ES-145-1/2 nut.

**03 US562 Beam clamp with Swing Hanger**  
 US562HDG  
 US562EG  
 US562  
 US562  
 1/2 in. set screw  
 included.

Rod size (in.)	Wt./C lb	Design load lb/ea
1/2	113	800

**04 U563 Beam clamp**  
 U563HDG  
 U563EG  
 U563  
 U563SS6  
 Square nut order  
 separately.  
 3/8 in. set screw  
 included.

Rod size (in.)	Wt./C lb	Design load lb/ea
3/8	33	400

3/8 in. set screw included.

Rod size (in.)	Wt./C lb	Design load lb/ea
3/8	33	240

**05 US563 Beam clamp with swing hanger**  
 US563HDG  
 US563  
 US563  
 3/8 in. set screw  
 included.

Rod size (in.)	Wt./C lb	Design load lb/ea
3/8	50	400

**Materials**

HDG(C)	Hot-dipped galvanized
EG(C)	Electrogalvanized
(No suffix)	GoldGalv®
SS6(C)	Stainless steel 316

**06 U569 Beam clamp**  
 U569HDG  
 U569  
 Maximum flange  
 width 5 in.

Cat. no.	A size (in.)	Wt./C lb	Design load lb/ea
U569	3/8	150	400

**07 A570 Beam clamp with safety rod**  
 Flange width 4 in.  
 min.-8 in. max.  
 For use with 3/8 in.  
 rod see U-569.

Cat. no.	A size (in.)	Wt./C lb	Design load lb/ea
A570HDG	1/2	220	500

All dimensions shown are in in.