iGen2200

2200 Watt Digital Inverter Gasoline Portable Generator

1800 Running Watts | 2200 Peak Watts

Westinghouse

50 State and Canada Model

- Built-in carry handle for easy transportation
- Fuel efficient, 1.2 gallon fuel tank that runs 12 hrs at 25% load
- Added air vents to keep unit cool while running
- Two 5V USB ports for charging sensitive electronics such as phones or tablets
- Rubber outlet dust covers
- Dependable 3 HP 79cc OHV 4-Stroke Westinghouse engine
- Double-insulated acoustic enclosure and low tone mufflers to reduce operating noise
- Parallel capable with another iGen using WHPC (additional generator and WHPC cord sold separate)

<3% THD SINE WAVE OUTPUT

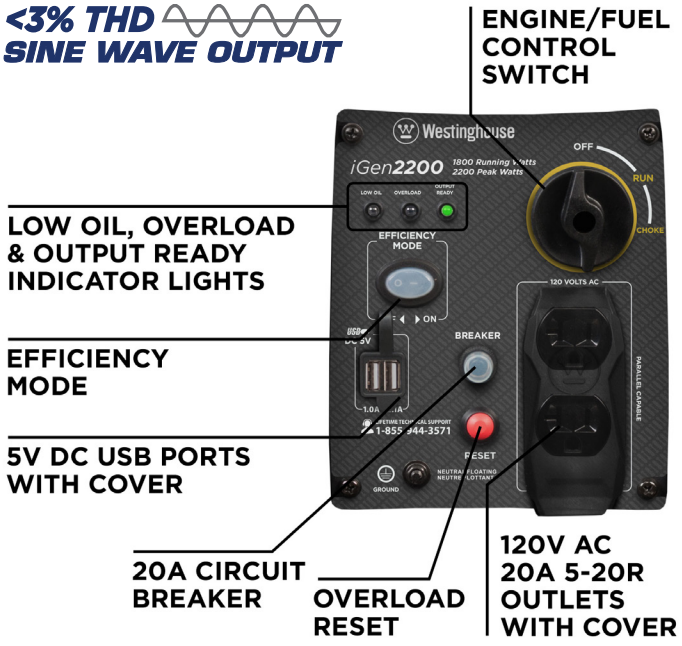

What Comes in the Box

*iGen***2200**
Inverter Generator Specifications

Westinghouse

Gasoline Peak Watts	2200
Gasoline Running Watts	1800
Peak Amps at 120V	18.3 amps
Running Amps at 120V	15 amps
AC Voltage	120 Volts
DC Voltage	5 Volts
AC Frequency	60 Hz
Parallel Capable with WHPC cord (sold separate)	Yes
Engine Horse Power (HP)	3 HP
Total Harmonic Distortion (THD)	<3%
Automatic Voltage Regulator (AVR)	Yes
Starting System	Recoil
Battery	No
Engine Displacement	79cc
Engine Brand	Westinghouse
Engine Type	OHV 4 Stroke
Engine Speed	Variable
Engine RPM	Max 5300
Available in True Timber Camo	Yes
Operational Volume	as low as 52 dBA
Spark Plug (included)	Torch E6RTC
Carburetor Kit Required to Operate at Altitude	Yes
Altitude Carburetor Kit Number (sold separate)	140540
Economy Mode Switch	Yes
Built-in Inverter	Yes
Engine Lubrication	Splash
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	.37 qt. (11.8 oz.)
Oil Capacity (Quarts/Ounces)	.37 qt. (11.8 oz.)
Low Oil Shutdown	Automatic
Fuel Type	Unleaded Gasoline, 10% Ethanol or less
Fuel Shut Off	Manual
Fuel Tank Material	Plastic
Fuel Tank Capacity (Gallons/Liters)	1.2 gal. (4.5 L)

Run Time at %25 Load (hrs.)	12 hrs.
Run Time at %50 Load (hrs.)	10 hrs.
Gasoline Fuel Gauge	No
Choke type	Manual
Choke Location	Control Panel
AC Outlets	(1) Duplex 120V 20A (5-20R)
DC Outlets	(2) 5V USB ports
Ground	Floating Neutral
Covered Outlets	Yes
Transfer Switch Ready	No
Westinghouse Portable Transfer Switch Ready (ST Switch)	No
Voltmeter	No
GFCI Outlets	No
LED Data Center	No
RV Ready Outlet	No
Overload Protection (circuit breaker)	Yes
Handle Style	Single, molded in case
Wheel Kit	No
Emissions	EPA, CARB
Canada CSA Compliant	Yes
Muffler	Pulse-Flo™
Spark Arrestor	Yes
Residential Warranty	3 Years
Commercial Warranty	1 Year
Assembled Length in. (mm)	19.8 in. (503 mm)
Assembled Width in. (mm)	11.4 in. (290 mm)
Assembled Height in. (mm)	17.9 in. (455 mm)
Carton Length in. (mm)	21.5 in. (546 mm)
Carton Width in. (mm)	12.75 in. (324 mm)
Carton Height in. (mm)	18.5 in. (470 mm)
Dry Unit Weight lb. (kg)	46 lb. (21 kg)
Shipping Weight lb. (kg)	53 lb. (24 kg)
UPC	855464003889
GTIN	00855464003889

09102018KD
©2018 Westinghouse Portable Power
Specifications are subject to change without notice
Westinghouse Portable Power
777 Manor Park Dr., Columbus, OH 43228

Have questions? Contact our team at service@wpowereq.com or call
855.944.3571

3 YEAR WARRANTY
3
YEAR
3 AÑOS DE GARRANTIA

/wpowereq /WestinghouseProducts WestinghousePortablePower.com