


VuLite® 5" Line Voltage Housings and Trims

IC Housings

V5IC W

5" IC New Construction
Energy efficient housing.
May be covered with insulation.

Dimensions:
11-7/8"L x 13-3/8"W x 7-1/2"H
Ceiling Cutout: 5-5/8" Diameter




TC Housings

V5TC W

5" TC New Construction
Requires 3" spacing from insulation.


Dimensions:
11-7/8"L x 13-3/8"W x 7-1/2"H
Ceiling Cutout: 5-5/8" Diameter



V5ICR W

5" IC Remodel
Energy efficient housing.
May be covered with insulation.


Dimensions:
14-3/8"L x 6-3/4"W x 7-1/2"H
Ceiling Cutout: 5-1/2" Diameter



V5TCR W

5" TC Remodel
Requires 3" spacing from insulation.

Dimensions:
12-1/2"L x 5-7/8"W x 7-1/2"H
Ceiling Cutout: 5-1/2" Diameter



Accessories:


ALG5 Airloc® gasket kit for V5IC W housing when an Airloc® trim is not being used. **G2405** Set of (4) T-bar clips for installation in suspended ceilings.

5" Compatible Trims

Baffle

V2015 WWH White
V2015 BWH Black


Aperture: 4-3/4"
Outer Diameter: 6-1/4"



Cone

V2016 CWH Clear
V2016 WWH White

Aperture: 4-3/4"
Outer Diameter: 6-1/4"



Juno Compatible Housings: Lamp Wattage/Type

V5IC W, V5ICR W: 65W BR30, 75W PAR30L, 75W PAR30 w/socket extender, 50W PAR30 (black only)

V5TC W, V5TCR W: 85W BR30, 75W PAR30L, 40W A19 (white only), 75W PAR30 (black only or use socket extender with white)

IC20, IC20R: 40W A19, 65W BR30, 75W PAR30L, 75W PAR30 w/socket extender

IC20N: 65W BR30

TC20, TC20R: 60W A19, 85W BR30, 75W PAR30L, 75W PAR30 w/socket extender

Juno Compatible Housings: Lamp Wattage/Type

V5IC W, V5ICR W: 65W BR30, 75W PAR30L, 75W PAR30 w/socket extender

V5TC W, V5TCR W: 85W BR30, 75W PAR30L, 75W PAR30 w/socket extender, 60W A19 (clear only), 40W A19 (white only)

IC20, IC20R: 40W A19, 65W BR30, 75W PAR30L, 75W PAR30 w/socket extender

IC20N: 65W BR30


TC20, TC20R: 60W A19, 85W BR30, 75W PAR30L, 75W PAR30 w/socket extender

R/PAR20 Eyeball

V2029 WH White

PAR30 Eyeball

V2030 WH White

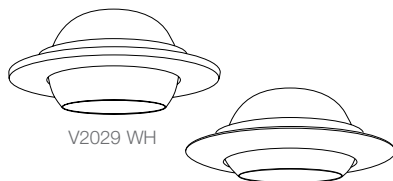

Outer Diameter (R/Par20 Eyeball): 6-1/4"
Outer Diameter (PAR30 Eyeball): 6-1/2"

Juno Compatible Housings: Lamp Wattage/Type

V2029 WH - V5IC W, V5ICR W: 50W R20, 50W PAR20

V5TC W, V5TCR W: 50W R20, 50W PAR20

IC20, IC20N, IC20R, TC20, TC20R: 50W PAR20, 50W R20

V2030 WH - V5IC W, V5ICR W: 75W PAR30

V5TC W, V5TCR W: 75W PAR30

IC20, IC20N, IC20R, TC20, TC20R: 75W PAR30

Flat Lens Shower with Reflector

V2010 WH White

Outer Diameter: 6-1/2"

Juno Compatible Housings: Lamp Wattage/Type


V5IC W, V5ICR W: 35W PAR30L

V5TC W, V5TCR W: 75W PAR30L, 90W A19

IC20, IC20R: 35W PAR30L & 40W A19

IC20N: 35W PAR30L

TC20, TC20R: 75W PAR30L & 90W A19




VuLite® 6" Line Voltage Housings and Trims

IC Housings

V6IC W 6" IC New Construction
V6ICN W 6" IC New Construction with Floating Socket

Energy efficient housing.
 May be covered with insulation.


Dimensions:
 13-3/4"L x 13-3/8"W x 7-3/8"H
 Ceiling Cutout: 6-1/2" Diameter



TC Housings


V6TC W
 6" TC New Construction
 Requires 3" spacing from insulation.

Dimensions:
 13-3/4"L x 13-3/8"W x 7-3/8"H
 Ceiling Cutout: 6-1/2" Diameter

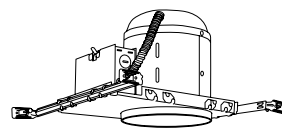


V6ICR W
 6" IC Remodel
 Energy efficient housing.
 May be covered with insulation.

Dimensions:
 13-3/4"L x 6-3/4"W x 7-3/8"H
 Ceiling Cutout: 6-1/4" Diameter



V6TCR W
 6" TC Remodel
 Requires 3" spacing from insulation.

Dimensions:
 13-3/4"L x 6-3/4"W x 7-3/8"H
 Ceiling Cutout: 6-1/4" Diameter




Accessories: **VALG6** Airloc® gasket kit for V6IC W housing when an Airloc® trim is not being used. **G2405** Set of(4) T-bar clips for installation in suspended ceilings.

6" Compatible Trims

Conical Baffle

V3024 WWH White
V3024 BWH Black

Aperture: 5-3/4"
 Outer Diameter: 7-3/4"




Juno Compatible Housings: Lamp Wattage/Type
V6IC W, V6ICR W: 50W PAR30, 75W PAR30L, 65W BR30
V6TC W, V6TCR W: 75W PAR30/PAR30L, 65W BR30, 120W BR40
IC22, IC22R: 50W PAR30, 75W PAR30L, 65W BR30
IC2, TC2, TC2R: 75W PAR30 w/socket extender, 75W PAR30L, 65W BR30

Straight Baffle

V3025 WWH White
V3025 BWH Black

Aperture: 5-3/4"
 Outer Diameter: 7-3/4"




Juno Compatible Housings: Lamp Wattage/Type
V6IC W, V6ICR W: 50W PAR30/PAR30L, 75W PAR38
V6TC W, V6TCR W: 75W PAR30/PAR30L, 65W BR30, 120W BR40, 120W PAR38
IC22, IC22R: 75W PAR30/PAR30L, 65W BR30, 75W PAR38
IC2: 75W PAR30 w/socket extender, 75W PAR30L, 65W BR30, 90W PAR38, 100W BR40
TC2, TC2R: 75W PAR30 w/socket extender, 75W PAR30L, 65W BR30, 150W PAR38, 120W BR40

Full Baffle

V3034 WWH White
V3034 BWH Black
V3034T WWH White w/Torsion Springs
V3034T BWH Black w/Torsion Springs

Aperture: 5-3/4"
 Outer Diameter: 7-5/8"



Juno Compatible Housings: Lamp Wattage/Type
V6IC W, V6ICN W, V6ICR W: 40W A19*, 75W PAR30/PAR30L, 65W BR30, 90W BR40, 90W PAR38*
V6TC W, V6TCR W: 60W A19*, 75W PAR30/PAR30L, 85W BR30, 120W BR40, 150W PAR38*
IC22, IC22R, IC23: 40W A19, 75W PAR30/PAR30L, 65W BR30, 90W BR40, 90W PAR38
IC2: 60W A19, 75W PAR30/PAR30L, 85W BR30, 100W PAR38, 120W BR40
TC2, TC2R: 60W A19, 75W PAR30/PAR30L, 85W BR30, 150W PAR38, 120W BR40
ICPL6 Series: 32W max. CFL
PL6 Series: 42W max CFL

* No A19 listing and 75W PAR38 max. for the V3034B Series
 † Note: For best performance, 26W is recommended.

Patent Pending

Clear Cone

V3027C WH: Clear

Aperture: 5-3/4"
 Outer Diameter: 7-3/4"



Juno Compatible Housings: Lamp Wattage/Type
V6IC W, V6ICR W: 50W PAR30, 75W PAR30L, 65W BR30
V6TC W, V6TCR W: 75W PAR30/PAR30L, 65W BR30, 90W BR40
IC2, IC22, IC22R: 50W PAR30, 75W PAR30L, 65W BR30
TC2, TC2R: 75W PAR30/PAR30L, 65W BR30

VuLite® 6" Line Voltage Housings and Trims

6" Compatible Trims

Full Cone

V3037 WWH White
V3037T WWH White w/Torsion Springs

Aperture: 5-3/4"
 Outer Diameter: 7-5/8"



Juno Compatible Housings: Lamp Wattage/Type

V6IC W, V6ICN W, V6ICR W: 40W A19, 75W PAR30/PAR30L, 65W BR30, 75W BR40, 90W PAR38
V6TC W, V6TCR W: 60W A19, 75W PAR30/PAR30L, 85W BR30, 120W BR40, 150W PAR38

IC22, IC22R, IC23: 40W A19, 75W PAR30/PAR30L, 65W BR30, 90W BR40, 90W PAR38

IC2: 60W A19, 75W PAR30/PAR30L, 85W BR30, 100W PAR38

TC2, TC2R: 60W A19, 75W PAR30/PAR30L, 85W BR30, 120W BR40, 150W PAR38

ICPL6 Series: 32W max. CFL†

PL6 Series: 42W max CFL†


†Note: For best performance, 26W is recommended.

Patent Pending

Eyeball

V3029 WH White

Outer Diameter: 7-3/4"



Juno Compatible Housings: Lamp Wattage/Type

V6IC W, V6ICN W, V6ICR W: 65W BR30, 75W PAR30L
V6TC W, V6TCR W: 75W PAR30/PAR30L, 65W BR30

IC22, IC22R, IC23, IC2, TC2, TC2R: 75W PAR30 w/socket extender, 75W PAR30L, 65W BR30

Stippled Opal Lens Shower

V3020 PW Plastic White

Outer Diameter: 8"



Juno Compatible Housings: Lamp Wattage/Type


V6TC W, V6TCR W: 40W A19, 75W PAR30/PAR30L, 65W BR30, 75W PAR38 (Not for use with V6IC/V6ICR)

TC2, TC2R: 60W A19, 75W PAR30/PAR30L, 65W BR30, 75W PAR38

Stippled Opal Lens Shower with Reflector

V3040N PW Plastic White

Outer Diameter: 8"



Juno Compatible Housings: Lamp Wattage/Type

V6IC W, V6ICN W, V6ICR W: 34W A19, 35W PAR30
V6TC W, V6TCR W: 75W A19

IC2, IC22, IC22R, IC23: 40W A19


TC2, TC2R: 75W A19

ICPL6/PL6 Series: 13W max. CFL

Drop Opal Lens Shower with Reflector

V3041 PW Plastic White

Outer Diameter: 8"



Juno Compatible Housings: Lamp Wattage/Type

V6IC W, V6ICN W, V6ICR W: 40W A19
V6TC W, V6TCR W: 100W A19

IC22, IC22R, IC23: 40W A19

IC2: 60W A19

TC2, TC2R: 100W A19


ICPL6/PL6 Series: 26W max. CFL

Open Frame

V3050 WH White

Aperture: 3-7/8"

Outer Diameter: 8"



Juno Compatible Housings: Lamp Wattage/Type

V6IC W, V6ICR W, V6TC W, V6TCR W: 65W BR30



All trademarks referenced are property of their respective owners. Specifications subject to change without notice. Printed in the U.S.A.