



# Halogen Lamps





## Full line of premium quality, professional grade halogen lamps

Halogen lamps are designed to provide crisp white light, long life and constant lumen maintenance.

The use of halogen gas enables the filament to burn slower and to operate at a higher temperature; which allows for a whiter and brighter light output. Halogen also allows for longer life and more lumens per watt making halogen lamps more efficient than regular incandescent lamps.

The crisp white light of the halogen reflects very nicely on crystal, making it sparkle and enhancing the property of crystal chandeliers.

Halogen lamps are dimmable and can be used in the most compact and stylish fixture designs.

Many STANDARD halogen lamps do have a coating that filters UV rays; but it doesn't apply to all of them, look for the icon that identifies them.



**A19 ENERGY SAVER LAMPS** are the new efficient general service lamps. They offer the same amount of light as the traditional incandescent lamps while saving 28 % in energy consumption.

They produce a crisp white light that is known to halogen and enhance all surrounding colours.

They are dimmable, instant on at full brightness, can be used in enclosed fixtures and meet all prescribed efficiency requirements.

A19



Order code	Description	Watts (W)	Base	Volts (V)	Finish	Average life (hours)	Initial lumens (lm)	Operating burn position	Incan. equivalent (W)	Case qty
<b>A19</b>										
MOL : 4 ¼ in. (108 mm)      Dia. : 2 ½ in. (60 mm)										
<sup>1</sup> 62794	H29/A19/CL/120V/STD	29	E26	120	Clear	1 000	400	Universal	40	100
<sup>1</sup> 62795	H43/A19/CL/120V/STD	43	E26	120	Clear	1 000	750	Universal	60	100
<sup>1</sup> 62796	H53/A19/CL/120V/STD	53	E26	120	Clear	1 000	1 050	Universal	75	100
<sup>1</sup> 62797	H72/A19/CL/120V/STD	72	E26	120	Clear	1 000	1 490	Universal	100	100
<sup>1</sup> 62798	H29/A19/FR/120V/STD	29	E26	120	Frost	1 000	400	Universal	40	100
<sup>1</sup> 62799	H43/A19/FR/120V/STD	43	E26	120	Frost	1 000	750	Universal	60	100
<sup>1</sup> 62800	H53/A19/FR/120V/STD	53	E26	120	Frost	1 000	1 050	Universal	75	100
<sup>1</sup> 62801	H72/A19/FR/120V/STD	72	E26	120	Frost	1 000	1 490	Universal	100	100

<sup>1</sup>Not suitable for use in damp locations or outdoors when exposed to weather.  
<sup>2</sup>This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.



INSTANT ON



ENERGY SAVING




DIMMABLE



STANDARD<sup>®</sup> US

# A19 Energy Saver Lamps

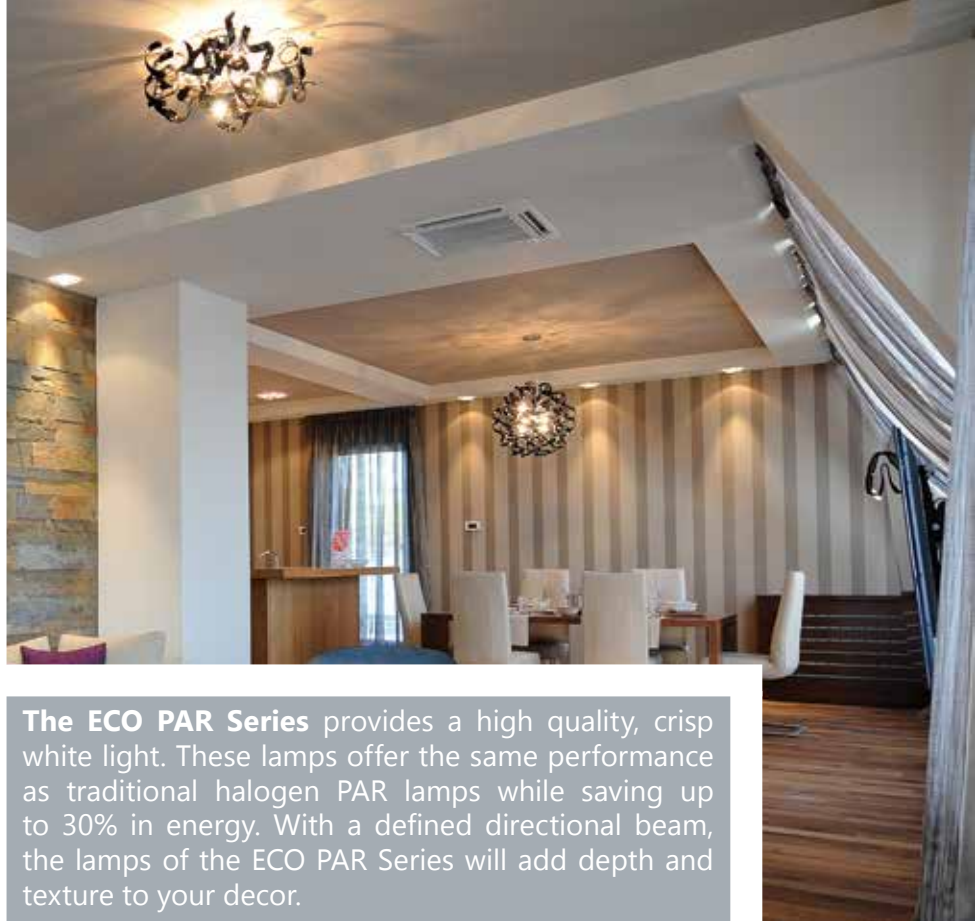

The **ECO PAR Series** provides a high quality, crisp white light. These lamps offer the same performance as traditional halogen PAR lamps while saving up to 30% in energy. With a defined directional beam, the lamps of the ECO PAR Series will add depth and texture to your decor.

PAR20



PAR30



PAR30LN



PAR38




Order code	Description	Watts (W)	Base	Volts (V)	Reflector Finish	Average life (hours)	Initial lumens (lm)	Operating burn position	Beam angle (°C)	Beam spread	CBCP (cd)	Incan. equivalent (W)	Case qty
<b>PAR20</b>													
MOL : 3 1/2 in. (79 mm)    Dia. : 2 1/2 in. (63 mm)													
63797	H35/PAR20/ECO/NFL/120V/STD	35	E26	120	Aluminum	2 000	500	Universal	25	Narrow Flood	850	50	15
<b>PAR30</b>													
MOL : 3 1/2 in. (90 mm)    Dia. : 3 1/2 in. (95 mm)													
63798	H35/PAR30/ECO/FL/120V/STD	35	E26	120	Silver	2 000	500	Universal	30	Flood	900	50	15
<sup>1</sup> 63799	H60/PAR30/ECO/FL/120V/STD	60	E26	120	Silver	1 500	1 070	Universal	30	Flood	1 100	75	15
<b>PAR30LN</b>													
MOL : 4 1/8 in. (119 mm)    Dia. : 3 1/2 in. (95 mm)													
63800	H35/PAR30LN/ECO/FL/120V/STD	35	E26	120	Silver	2 000	500	Universal	30	Flood	900	50	15
<sup>1</sup> 63801	H60/PAR30LN/ECO/FL/120V/STD	60	E26	120	Silver	1 500	1 070	Universal	30	Flood	1 100	75	15
<b>PAR38</b>													
MOL : 5 1/8 in. (132 mm)    Dia. : 4 1/8 in. (104 mm)													
<sup>1</sup> 63802	H60/PAR38/ECO/FL/120V/STD	60	E26	120	Silver	1 500	1 070	Universal	30	Flood	1 100	75	15
<sup>1</sup> 63803	H70/PAR38/ECO/FL/120V/STD	70	E26	120	Silver	1 500	1 301	Universal	30	Flood	2 000	90	15

*Not suitable for use in damp locations or outdoors when exposed to weather.  
<sup>1</sup>This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.*



# Energy Saving PAR Lamps

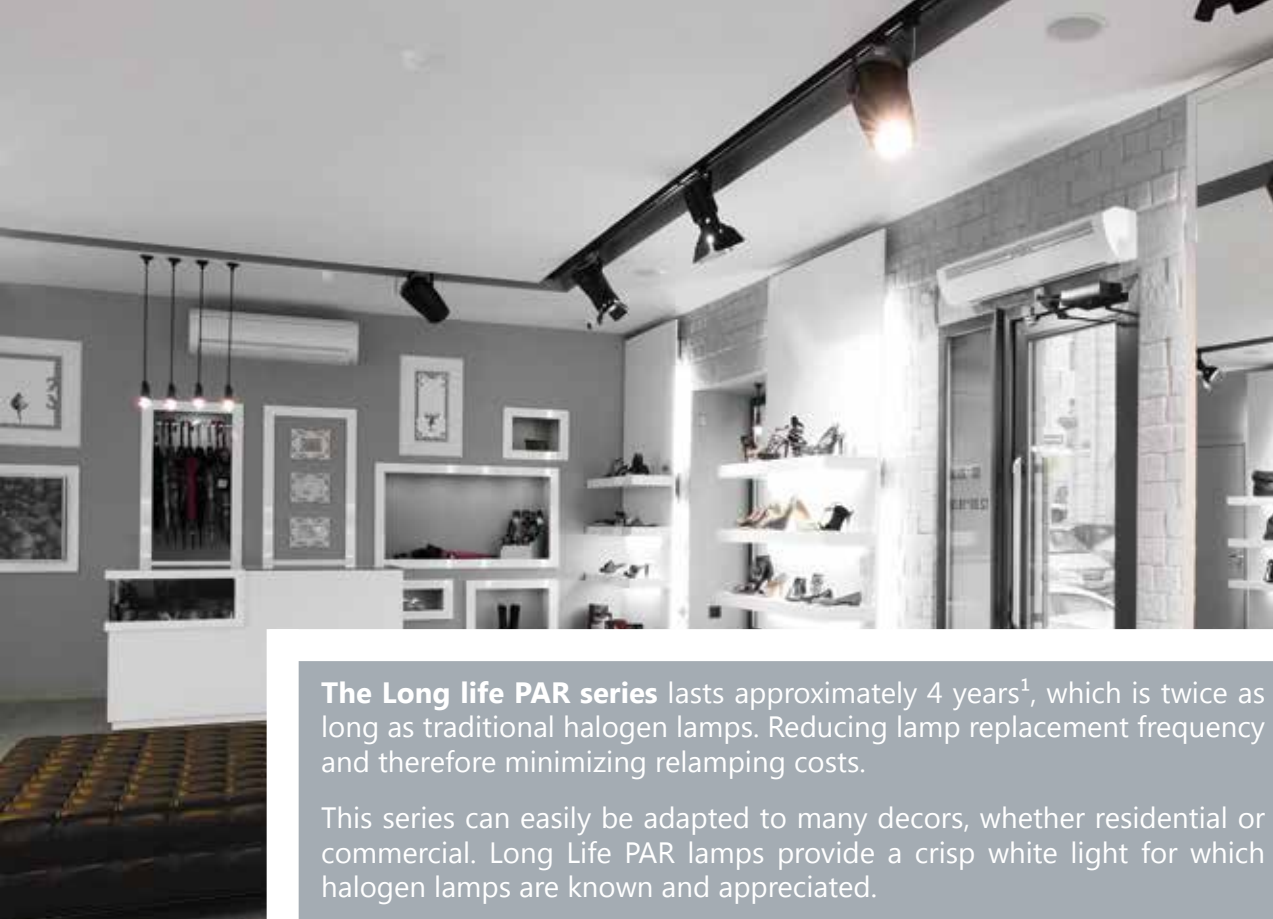

**The Long life PAR series** lasts approximately 4 years<sup>1</sup>, which is twice as long as traditional halogen lamps. Reducing lamp replacement frequency and therefore minimizing relamping costs.

This series can easily be adapted to many decors, whether residential or commercial. Long Life PAR lamps provide a crisp white light for which halogen lamps are known and appreciated.



Order code	Description	Watts (W)	Base	Volts (V)	Reflector Finish	Average life (hours)	Initial lumens (lm)	Operating burn position	Beam angle (°C)	Beam spread	CBCP (cd)	Incan. equivalent (W)	Case qty
<b>PAR20</b>													
MOL : 3 1/2 in. (79 mm)    Dia. : 2 1/2 in. (63 mm)													
63790	H42/PAR20/HIR/NFL/120V/STD	42	E26	120	Aluminum	4 000	700	Universal	30	Narrow Flood	400	50	15
<b>PAR30</b>													
MOL : 3 1/2 in. (90 mm)    Dia. : 3 3/4 in. (95 mm)													
63791	H42/PAR30/HIR/FL/120V/STD	42	E26	120	Aluminum	4 000	700	Universal	35	Flood	300	50	15
63792	H53/PAR30/HIR/FL/120V/STD	53	E26	120	Aluminum	4 000	1 000	Universal	35	Flood	900	75	15
<b>PAR30LN</b>													
MOL : 4 1/8 in. (119 mm)    Dia. : 3 3/4 in. (95 mm)													
63793	H42/PAR30LN/HIR/FL/120V/STD	42	E26	120	Aluminum	4 000	700	Universal	35	Flood	300	50	15
63794	H53/PAR30LN/HIR/FL/120V/STD	53	E26	120	Aluminum	4 000	1 000	Universal	35	Flood	900	75	15
<b>PAR38</b>													
MOL : 5 1/8 in. (132 mm)    Dia. : 4 1/8 in. (104 mm)													
63795	H53/PAR38/HIR/FL/120V/STD	53	E26	120	Aluminum	4 000	1 000	Universal	35	Flood	900	75	15
63796	H71/PAR38/HIR/FL/120V/STD	71	E26	120	Aluminum	4 000	1 350	Universal	35	Flood	1 100	90	15

<sup>1</sup>Based on an average daily usage of 3 hours.  
Not suitable for use in damp locations or outdoors when exposed to weather.



# Long Life PAR Lamps



*Traditional light*



*Neodymium light*

**NEODYMIUM** glass is made with rare earth metallic trivalent element called neodymium which filters the dull yellow emission given off from ordinary lamps, resulting in more vibrant colours, as if exposed in natural light.

The neodymium is baked in the glass and will therefore not flake off over lamp life.

Neodymium glass eliminates glare reducing eye strain and is also known for producing a light that is excellent to maintain morale and high energy.



Order code	Description	Watts (W)	Base	Volts (V)	Colour/ Finish	Beam angle (°)	Beam spread	CBCP (cd)	Average life (hrs)	Initial lumens (lm)	Case qty
<b>ES16</b>											
MOL : 2 7/32 in. (58 mm)      Dia. : 2 in. (51 mm)											
60872	H50GU10/FL/N/3M/130V/STD	50	GU10	130	Neo.	35	Flood	1 800	3 000	410	100
<b>MR16</b>											
MOL : 1 13/16 in. (46 mm)      Dia. : 2 in. (51 mm)											
60871	H50MR16/FL/N/CG/2M/GU5.3/12V/STD	50	GU5.3	12	Neo.	38	Flood	1 400	2 000	550	120
<b>PAR20</b>											
MOL : 3 7/32 in. (82 mm)      Dia. : 2.5 in. (63.5 mm)											
157331	H50PAR20/NFL/N/CL/2M/120V/STD	50	E26	120	Neo.	30	Narrow Flood	1 050	2 000	500	15
<b>PAR30</b>											
MOL : 3 25/32 in. (93 mm)      Dia. : 3 3/4 in. (95 mm)											
158360	H75PAR30/FL/N/2M/130V/STD	75	E26	130	Neo.	30	Flood	N/A	2 000	1 000	15



<sup>1</sup>This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.

# Neodymium Lamps

Use **COLOURED BACK MR16 LAMPS** to create a beautiful decorative effect. They are ideal for use in coloured fixtures where the lamp is visible. Improve aesthetics without compromising quality of light.



Order code	Description	ANSI code	Watts (W)	Base	Volts (V)	Colour/Finish	Beam angle (°)	Beam spread	CBCP (cd)	Average life (hrs)	Initial lumens (lm)	Case qty
<b>MR16 - Cover Glass</b>												
MOL : 1 25/32 in. (45 mm)    Dia. : 2 in. (51 mm)												
55029	H50MR16/FL/WH/CG/3M/GX5.3/12V/STD	EXN/CG	50	GX5.3	12	White	38	Flood	1 600	3 000	850	100
55030	H50MR16/FL/GLD/CG/3M/GX5.3/12V/STD	EXN/CG	50	GX5.3	12	Gold	38	Flood	1 600	3 000	850	100
55031	H50MR16/FL/SLV/CG/3M/GX5.3/12V/STD	EXN/CG	50	GX5.3	12	Silver	38	Flood	1 600	3 000	850	100
55032	H50MR16/FL/BLK/CG/3M/GX5.3/12V/STD	EXN/CG	50	GX5.3	12	Black	38	Flood	1 600	3 000	850	100



**THE UNI-FROST™** series are design oriented lamps that set themselves apart by using a fully frosted cover as well as a fully frosted reflector to let light shine in all directions. Conventional dichroic reflector lamps can cause colour changes or disruptive patterns on glass fixtures.



Order code	Description	Watts (W)	Base	Volts (V)	Colour/Finish	Beam angle (°)	Beam spread	CBCP (cd)	Average life (hrs)	Initial lumens (lm)	Case qty
<b>MR16 - Cover Glass</b>											
MOL : 1 25/32 in. (45 mm)    Dia. : 2 in. (51 mm)											
57210	H35MR16/CG/4M/GU5.3/12V/STD UFR	35	GU5.3	12	Frost	N/A	N/A	N/A	4 000	470	200
57211	H50MR16/CG/4M/GU5.3/12V/STD UFR	50	GU5.3	12	Frost	N/A	N/A	N/A	4 000	750	200
<b>ES16 - Cover Glass</b>											
MOL : 2 3/32 in. (110 mm)    Dia. : 2 in. (51 mm)											
57212*	H35GU10/CG/2.5M/120V/STD UFR	35	GU10	120	Frost	N/A	N/A	N/A	2 500	330	100
57213*	H50GU10/CG/2.5M/120V/STD UFR	50	GU10	120	Frost	N/A	N/A	N/A	2 500	520	200
57801*	H50GU10/CG/3M/130V/STD UFR	50	GU10	130	Frost	N/A	N/A	N/A	3 000	390	200



# Coloured Back & UNI-FROST™



The frosted lens on **ICE LAMPS** provide soft no glare illumination, eliminating dark lines and shadows.



Order code	Description	Watts (W)	Base	Volts (V)	Beam angle (°)	Beam spread	CBCP (cd)	Average life (hrs)	Initial lumens (lm)	Case qty	
<b>ES16</b>											
MOL : 2 3/32 in. (55 mm)      Dia. : 2 in. (51 mm)											
55052	H20GU10/CG/2.5M/120V/STD ICE	20	GU10	120	40	Flood	300	2500	130	200	
55051	H35GU10/CG/2.5M/120V/STD ICE	35	GU10	120	40	Flood	600	2500	280	200	
55038	H50GU10/CG/2.5M/120V/STD ICE	50	GU10	120	40	Flood	840	2500	500	200	
55037	H50GU10/CG/2.5M/130V/STD ICE	50	GU10	130	40	Flood	840	2500	375	200	
<b>MR16</b>											
MOL : 1 7/32 in. (45 mm)      Dia. : 2 in. (51 mm)											
55039	H50MR16/5M/GX5.3/12V/STD ICE	50	GX5.3	12	N/A	Flood	N/A	5000	850	200	
<b>PAR20</b>											
MOL : 3 7/32 in. (82 mm)      Dia. : 2.5 in. (63.5 mm)											
150185	H50PAR20/NFL/2.5M/120V/STD ICE	50	E26	120	N/A	Narrow Flood	N/A	2500	500	15	
150184	H50PAR20/NFL/5M/130V/STD ICE	50	E26	130	N/A	Narrow Flood	N/A	5000	375	15	
<b>PAR30</b>											
MOL : 3 9/32 in. (93 mm)      Dia. : 3 3/4 in. (95 mm)											
150187	H50PAR30/FL/2.5M/120V/STD ICE	50	E26	120	N/A	Flood	N/A	2500	600	15	
150186	H50PAR30/FL/5M/130V/STD ICE	50	E26	130	N/A	Flood	N/A	5000	450	15	
150191	H75PAR30/FL/2.5M/120V/STD ICE	75	E26	120	N/A	Flood	N/A	2500	990	15	
150190	H75PAR30/FL/5M/130V/STD ICE	75	E26	130	N/A	Flood	N/A	5000	745	15	
<b>PAR30LN</b>											
MOL : 4 13/32 in. (122 mm)      Dia. : 3 3/4 in. (95 mm)											
150189	H50PAR30/LN/FL/2.5M/120V/STD ICE	50	E26	120	N/A	Flood	N/A	2500	600	15	
150188	H50PAR30/LN/FL/5M/130V/STD ICE	50	E26	130	N/A	Flood	N/A	5000	450	15	
150193	H75PAR30/LN/FL/2.5M/120V/STD ICE	75	E26	120	N/A	Flood	N/A	2500	990	15	
150192	H75PAR30/LN/FL/5M/130V/STD ICE	75	E26	130	N/A	Flood	N/A	5000	745	15	
<b>PAR38</b>											
MOL : 5 7/32 in. (135 mm)      Dia. : 4 3/4 in. (121 mm)											
150733	H75PAR38/FL/2.5M/MS/120V/STD ICE	75	E26SKT	120	N/A	Flood	N/A	2500	990	15	
151053	H75PAR38/FL/5M/MS/130V/STD ICE	75	E26SKT	130	N/A	Flood	N/A	5000	745	15	
150195	H90PAR38/FL/2.5M/MS/120V/STD ICE	90	E26SKT	120	N/A	Flood	N/A	2500	1 140	15	
150194	H90PAR38/FL/5M/MS/130V/STD ICE	90	E26SKT	130	N/A	Flood	N/A	5000	860	15	



*1This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.*

# ICE Lamps





**JC TYPE LAMPS** are low voltage capsules with pin bases.



Order code	Description	Watts (W)	Base	Volts (V)	Colour/Finish	Average life (hrs)	Initial lumens (lm)	Case qty
<b>JC (G4)</b>								
MOL : 1 7/16 in. (33 mm) Dia. : 11/32 in. (9 mm)								
51129	H10JC/CL/2M/G4/12V/STD	10	G4	12	Clear	2 000	130	100
51130	H20JC/CL/2M/G4/12V/STD	20	G4	12	Clear	2 000	300	100
<b>JC (GY6.35)</b>								
MOL : 1 29/32 in. (44 mm) Dia. : 15/32 in. (12 mm)								
50902	H50JC/CL/4M/GY6.35/12V/STD	50	GY6.35	12	Clear	4 000	900	100
<b>JC (GY6.35)</b>								
MOL : 2 1/4 in. (57 mm) Dia. : 15/32 in. (12 mm)								
22121	200T4/CL/32V/GY9.5/STD 1945	200	GY9.5	32	Clear	200	4 500	100

**JD TYPE LAMPS** are tubular shaped and run on line voltage. JD halogen lamps can have E26, BA15d, E11, E12, E14 and G9 bases.



Order code	Description	Watts (W)	Base	Volts (V)	Colour/Finish	Average life (hrs)	Initial lumens (lm)	Case qty
<b>T3 (BA15d)</b>								
MOL : 2 7/32 in. (56 mm) Dia. : 19/32 in. (15 mm)								
50881	H75T3/CL/2M/BA15D/130V/STD	75	BA15d	130	Clear	2 000	1 120	120
50950	H100T3/CL/2M/BA15D/130V/STD	100	BA15d	130	Clear	2 000	1 600	50
50883	H150T3/CL/2M/BA15D/130V/STD	150	BA15d	130	Clear	2 000	3 000	120
50885	H250T3/CL/2M/BA15D/130V/STD	250	BA15d	130	Clear	2 000	4 800	50
<b>T3 (E11)</b>								
MOL : 2 15/32 in. (63 mm) Dia. : 23/32 in. (18 mm)								
55028	H50T3/CL/2M/E11/130V/STD	50	E11	130	Clear	2 000	1 120	120
50880	H75T3/CL/2M/E11/130V/STD	75	E11	130	Clear	2 000	1 350	120
50882	H100T3/CL/2M/E11/130V/STD	100	E11	130	Clear	2 000	1 800	120
50951	H150T3/CL/2M/E11/130V/STD	150	E11	130	Clear	2 000	3 000	120
50884	H250T3/CL/2M/E11/130V/STD	250	E11	130	Clear	2 000	4 800	50



# JC & JD Lamps



**XENON JD LAMPS** are filled with low pressure xenon gas. They provide a very bright crisp white light in a very compact lamp.

Unlike halogen filled lamps, they do not produce UV and can be handled with bare hands with no effect on lamp life. They are safe to use in open fixtures and are more tolerant to voltage fluctuations resulting in longer life.

Xenon lamps are ideal for lighting sensitive objects such as works of art.



Order code	Description	Watts (W)	Base	Volts (V)	Colour/Finish	Average life (hrs)	Initial lumens (lm)	Case qty
<b>T3 (E26)</b>								
MOL : 2 3/4 in. (70 mm)      Dia. : 1 1/2 in. (26 mm)								
15457	X40T3/F/3M/KX/120V	40	E26	120	Frost	3 000	560	50
<b>T3 (BA15d)</b>								
MOL : 2 3/32 in. (63 mm)      Dia. : 23/32 in. (18 mm)								
15439	X20T3/3M/KX/BA15D/120V	20	BA15d	120	Clear	3 000	200	50
60952	X40T3/2M/BA15D/120V/STD	40	BA15d	120	Clear	2 000	560	120
60956	X60T3/2M/BA15D/120V/STD	60	BA15d	120	Clear	2 000	960	120
<b>T3 (E11)</b>								
MOL : 2 1/4 in. (57 mm)      Dia. : 23/32 in. (18 mm)								
15440	X20T3/3M/KX/E11/120V	20	E11	120	Clear	3 000	200	50
60950	X40T3/2M/E11/120V/STD	40	E11	120	Clear	2 000	560	120
60954	X60T3/2M/E11/120V/STD	60	E11	120	Clear	2 000	960	120
<b>T3 (E12)</b>								
MOL : 2 3/16 in. (59 mm)      Dia. : 23/32 in. (18 mm)								
60948	X20T3/2M/E12/120V/STD	20	E12	120	Clear	2 000	200	120
60951	X40T3/2M/E12/120V/STD	40	E12	120	Clear	2 000	560	120
60955	X60T3/2M/E12/120V/STD	60	E12	120	Clear	2 000	960	120
<b>T3 (E12)</b>								
MOL : 1 23/32 in. (45 mm)      Dia. : 23/32 in. (18 mm)								
60949	X20T3/F/2M/E12/120V/STD	20	E12	120	Frost	2 000	200	120
60953	X40T3/F/2M/E12/120V/STD	40	E12	120	Frost	2 000	560	120
60957	X60T3/F/2M/E12/120V/STD	60	E12	120	Frost	2 000	960	120




# Xenon JD Lamps

**G9 BASED JD LAMPS** are commonly referred to as G9 lamps.

They are offered in regular glass base and in ceramic base; ceramic is known for dissipating heat. All STANDARD G9 based JD lamps are safe to use in open fixtures due to their patented integral safety fuses. The lamp filament is well supported through glass pinch technology which minimizes deformation as well.

They are all made of UV stop quartz.

JD (G9) Glass Base



JD (G9) Ceramic Base



Order code	Description	Watts (W)	Base	Volts (V)	Colour/Finish	Average life (hrs)	Initial lumens (lm)	Case qty
<b>JD (G9) - Glass Base</b>								
MOL : 1 25/32 in. (42 mm)      Dia. : 5/32 in. (12 mm)								
58260	H25JD/42mm/CL/2M/G9/130V/STD	25	G9	130	Clear	2000	255	100
58257	H35JD/42mm/F/2M/G9/130V/STD	35	G9	130	Frost	2000	380	100
57259	H40JD/42MM/CL/2M/G9/130V/STD	40	G9	130	Clear	2000	480	100
57256	H40JD/42MM/F/2M/G9/130V/STD	40	G9	130	Frost	2000	480	100
57255	H50JD/42MM/CL/2M/G9/130V/STD	50	G9	130	Clear	2000	600	100
57261	H50JD/42MM/F/2M/G9/130V/STD	50	G9	130	Frost	2000	600	100
57258	H60JD/42MM/CL/2M/G9/130V/STD	60	G9	130	Clear	2000	800	100
57260	H60JD/42MM/F/2M/G9/130V/STD	60	G9	130	Frost	2000	800	100
58258	H75JD/42mm/CL/2M/G9/130V/STD	75	G9	130	Clear	2000	1050	100
<b>JD (G9) - Ceramic Base</b>								
MOL : 2 1/32 in. (56 mm)      Dia. : 5/32 in. (12 mm)								
55057	H25JD/56MM/CL/2M/G9/120V/STD	25	G9	120	Clear	2000	255	100
55058	H40JD/56MM/CL/2M/G9/120V/STD	40	G9	120	Clear	2000	480	100
57253	H40JD/56MM/F/2M/G9/120V/STD	40	G9	120	Frost	2000	480	100
11247	H50JD/56MM/CL/2M/G9/120V/STD	50	G9	120	Clear	2000	600	100
15646	H50JD/56MM/F/2M/G9/120V/STD	50	G9	120	Frost	2000	600	100
55059	H60JD/56MM/CL/2M/G9/120V/STD	60	G9	120	Clear	2000	800	100
57257	H60JD/56MM/F/2M/G9/120V/STD	60	G9	120	Frost	2000	800	100
55060	H75JD/56MM/CL/2M/G9/120V/STD	75	G9	120	Clear	2000	1050	100



JD Lamps



**JCD TYPE LAMPS** are line voltage (120-130 volt) halogen capsules with pin bases.

All STANDARD JCD lamps are safe to use in open fixtures due to their patented integral safety fuses.


The filament is well supported through glass pinch technology which minimizes deformation as well. They are all made of UV stop quartz.



Order code	Description	Watts (W)	Base	Volts (V)	Colour/Finish	Average life (hrs)	Initial lumens (lm)	Case qty
<b>JCD (GY6.35)</b>								
MOL: 1 13/16 in. (46 mm)    Dia.: 1/2 in. (13 mm)								
51045	H20JCD/CL/2M/GY6.35/120V/STD	20	GY6.35	120	Clear	2 000	180	120
50879	H35JCD/CL/2M/GY6.35/120V/STD	35	GY6.35	120	Clear	2 000	380	120
50878	H50JCD/CL/2M/GY6.35/120V/STD	50	GY6.35	120	Clear	2 000	600	120
10317	H75JCD/CL/2M/GY6.35/120V/STD	75	GY6.35	120	Clear	2 000	1 050	100
50877	H100JCD/CL/2M/GY6.35/120V/STD	100	GY6.35	120	Clear	2 000	1 500	100
<b>JCD (G8)</b>								
MOL: 1 13/16 in. (46 mm)    Dia.: 1/2 in. (13 mm)								
55055	H20JCD/CL/2M/G8/120V/STD	20	G8	120	Clear	2 000	200	100
10253	H35JCD/CL/2M/G8/120V/STD	35	G8	120	Clear	2 000	380	120
10368	H50JCD/CL/2M/G8/120V/STD	50	G8	120	Clear	2 000	600	120
15710	JCD100W/130V/G8	100	G8	130	Clear	2 000	1 600	100
<b>JCD (GY8)</b>								
MOL: 1 7/8 in. (47.5 mm)    Dia.: 1/2 in. (13 mm)								
11266	H25JCD/CL/2M/GY8/120V	25	GY8	120	Clear	2 000	420	50
11267	H75JCD/CL/2M/GY8/120V	75	GY8	120	Clear	2 000	1 300	50
11265	H100JCD/CL/2M/GY8/120V	100	GY8	120	Clear	2 000	1 900	50



# JCD Lamps

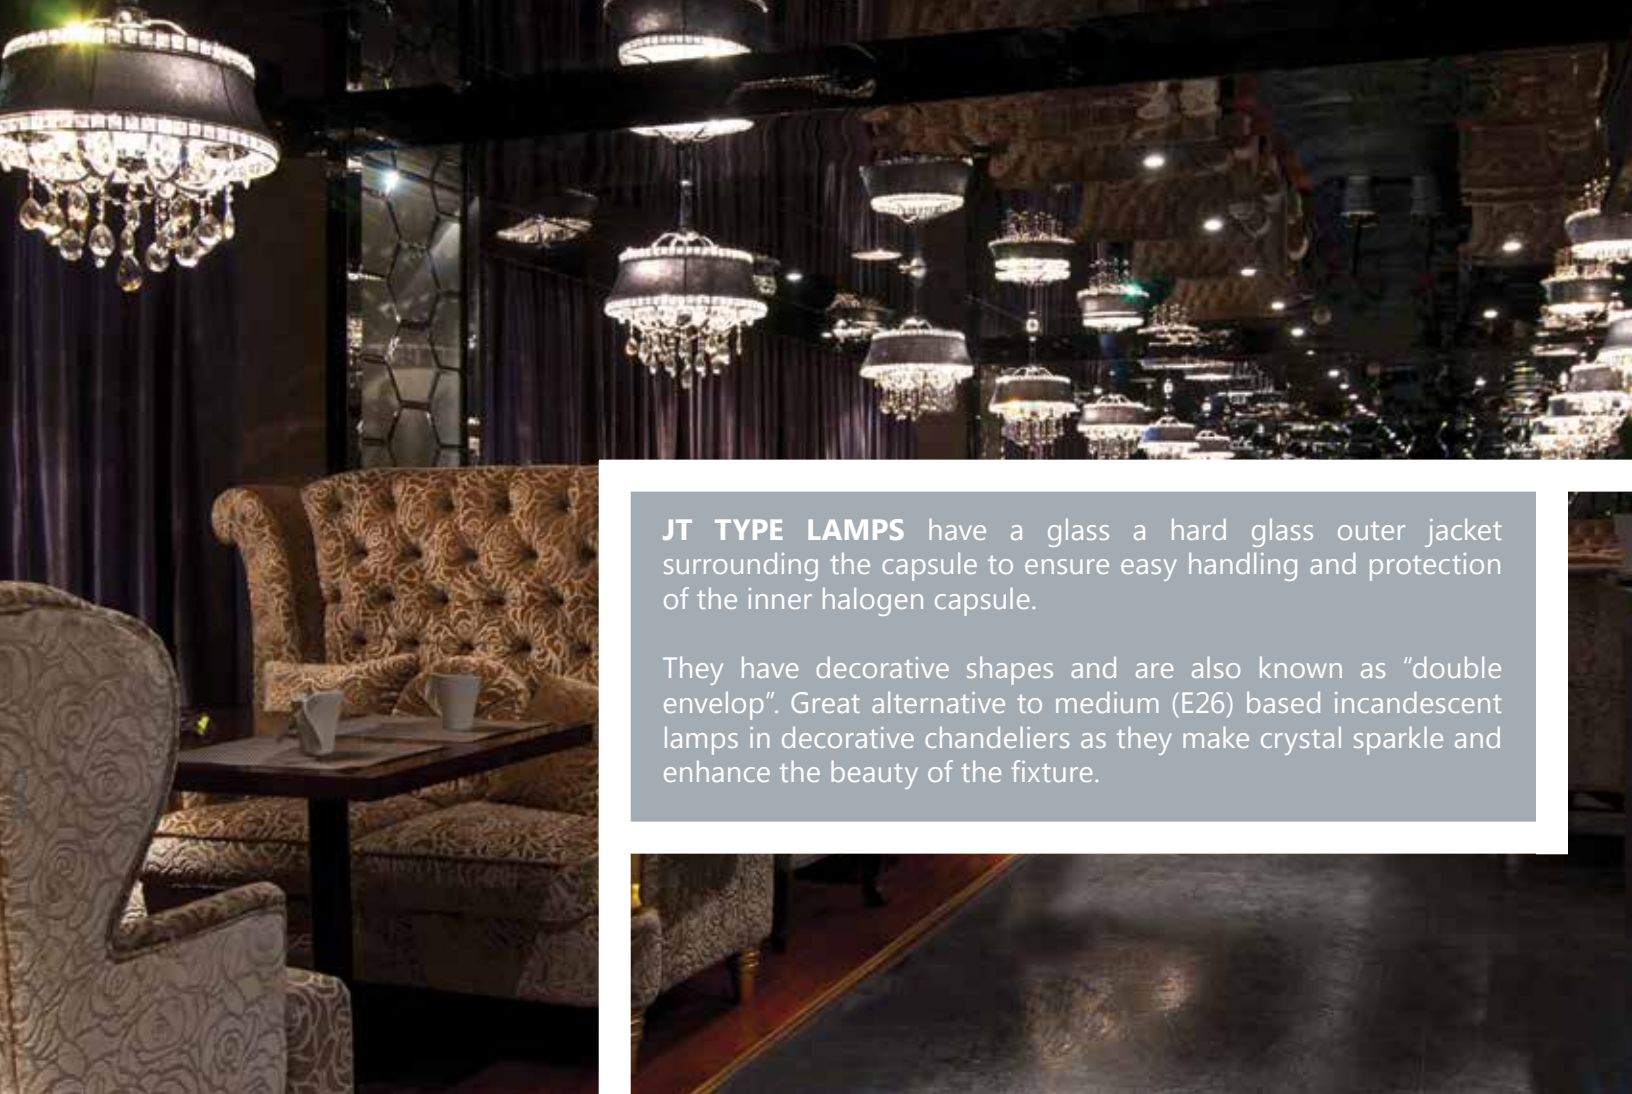

**JT TYPE LAMPS** have a glass a hard glass outer jacket surrounding the capsule to ensure easy handling and protection of the inner halogen capsule.

They have decorative shapes and are also known as "double envelop". Great alternative to medium (E26) based incandescent lamps in decorative chandeliers as they make crystal sparkle and enhance the beauty of the fixture.



Order code	Description	Watts (W)	Base	Volts (V)	Colour/Finish	Average life (hrs)	Initial lumens (lm)	Operating burn position	Case qty
<b>BT15</b>									
MOL : 4 1/4 in. (108 mm)    Dia. : 1 7/8 in. (48 mm)									
<sup>1</sup> 10219*	H60BT15/WH/2M/120V/STD	60	E26	120	White	2000	950	BU/BD	15
<b>F10</b>									
MOL : 3 1/16 in. (94 mm)    Dia. : 1 1/4 in. (32 mm)									
<sup>1</sup> 10216*	H40F10/CL/2M/E12/120V/STD	40	E12	120	Clear	2000	520	BU/BD	15
<sup>1</sup> 10220*	H60F10/CL/2M/E12/120V/STD	60	E12	120	Clear	2000	1000	BU/BD	15
<b>T10</b>									
MOL : 3 1/16 in. (90 mm)    Dia. : 1 1/4 in. (32 mm)									
<sup>1</sup> 50886	H75T10/CL/2M/120V/STD	75	E26	120	Clear	2000	920	BU/BD	250

*\*This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.*



# JT Lamps



MR11 (G4)



MR16 (GX5.3)



MR16 (E26)



MR16 (GU10)



Order code	Description	ANSI code	Watts (W)	Base	Volts (V)	Colour temp. (K)	Beam angle (°)	Beam spread	CBCP (cd)	Average life (hrs)	Initial lumens (lm)	Case qty
------------	-------------	-----------	-----------	------	-----------	------------------	----------------	-------------	-----------	--------------------	---------------------	----------

### MR11 - Cover Glass

MOL : 1 3/8 in. (35 mm) Dia. : 1 1/2 in. (35 mm)

55094	H10MR11/NSP/CG/2M/G4/6V/STD	N/A	10	G4	6	2 900	10	Narrow Spot	700	2 000	80	100
55054	H5MR11/NSP/CG/2M/G4/12V/STD	N/A	5	G4	12	2 900	10	Narrow Spot	700	2 000	45	120
50900	H20MR11/NFL/CG/2M/G4/12V/FTC STD	FTC/CG	20	G4	12	2 900	17	Narrow Flood	1 600	2 000	200	200
51050	H20MR11/MFL/CG/2M/G4/12V/FTD STD	FTD/CG	20	G4	12	2 900	27	Flood	600	2 000	200	120
50901	H35MR11/NFL/CG/2M/G4/12V/FTF STD	FTF/CG	35	G4	12	2 900	18	Narrow Flood	3 000	2 000	345	200
50899	H35MR11/MFL/CG/2M/G4/12V/FTH STD	FTH/CG	35	G4	12	2 900	28	Flood	1 300	2 000	345	120

### MR11 - Open

MOL : 1 3/8 in. (35 mm) Dia. : 1 1/2 in. (35 mm)

50894	H20MR11/NSP/AX/G4/12V/FTB STD	FTB	20	G4	12	2 900	11	Narrow Spot	5 000	2 000	200	200
50895	H20MR11/NFL/AX/G4/12V/FTC STD	FTC	20	G4	12	2 900	19	Narrow Flood	1 600	2 000	200	120
51054	H20MR11/MFL/AX/G4/12V/FTD STD	FTD	20	G4	12	2 900	29	Flood	600	2 000	200	120
50897	H35MR11/NFL/AX/G4/12V/FTF STD	FTF	35	G4	12	2 900	19	Narrow Flood	3 000	2 000	345	200
50898	H35MR11/MFL/AX/G4/12V/FTH STD	FTH	35	G4	12	2 900	30	Flood	1 300	2 000	345	120

### MR16 - Cover Glass

MOL : 1 5/8 in. (45 mm) Dia. : 2 in. (51 mm)

51134	H20MR16/FL/CG/4M/GX5.3/12V/BAB STD	BAB/CG	20	GX5.3	12	2 950	38	Flood	500	4 000	260	100
50892	H35MR16/FL/CG/4M/GX5.3/12V/FMW STD	FMW/CG	35	GX5.3	12	3 000	38	Flood	1 000	4 000	530	100
50893	H50MR16/FL/CG/4M/GX5.3/12V/EXN STD	EXN/CG	50	GX5.3	12	3 050	38	Flood	1 600	4 000	850	100

### MR16 - Cover Glass - Line Voltage

MOL : 2 3/8 in. (55 mm) Dia. : 2 in. (51 mm)

55570*	H35MR16/FL/CG/2M/E26/120V/STD	N/A	35	E26	120	2 800	38	Flood	800	2 000	240	100
57312*	H50MR16/FL/CG/2M/E27/120V/STD	N/A	50	E27	120	2 800	30	Flood	1 100	2 000	420	200
55569*	H50MR16/FL/CG/2M/E26/120V/STD	N/A	50	E26	120	2 800	38	Flood	1 100	2 000	420	100
59590*	H35MR16/FL/CG/E26/130V/STD	N/A	35	E26	130	2 800	38	Flood	800	2 500	180	100
59589*	H50MR16/FL/CG/E26/130V/STD	N/A	50	E26	130	2 800	38	Flood	1 100	2 500	315	100

### MR16 (GU10)

MOL : 2 3/8 in. (55 mm) Dia. : 2 in. (51 mm)

55034	H20GU10/NFL/CG/2.5M/120V/STD		20	GU10	120	2 800	25	Narrow Flood	500	2 500	120	100
55033	H35GU10/NFL/CG/2.5M/120V/STD		35	GU10	120	2 800	25	Narrow Flood	1 000	2 500	280	100
10437	H50GU10/NFL/CG/2.5M/120V/STD		50	GU10	120	2 800	25	Narrow Flood	1 400	2 500	500	100
55035	H50GU10/NFL/2M/CG/120V/ HS		50	GU10	120	2 800	25	Narrow Flood	1 400	2 000	N/A	15
10438	H50GU10/NFL/CG/3M/130V/STD		50	GU10	130	2 800	25	Narrow Flood	1 400	3 000	375	100

### MR16 - Open

MOL : 1 5/8 in. (45 mm) Dia. : 2 in. (51 mm)

51066	H20MR16/FL/4M/GX5.3/12V/BAB STD	BAB	20	GX5.3	12	2 950	36	Flood	500	4 000	260	100
50888	H35MR16/FL/4M/GX5.3/12V/FMW STD	FMW	35	GX5.3	12	3 000	38	Flood	1 000	4 000	530	200
50889	H50MR16/NSP/4M/GX5.3/12V/EXT STD	EXT	50	GX5.3	12	3 050	13	Narrow Spot	9 800	4 000	850	100
50890	H50MR16/NFL/4M/GX5.3/12V/EXZ STD	EXZ	50	GX5.3	12	3 050	24	Narrow Flood	3 200	4 000	850	100
50891	H50MR16/FL/4M/GX5.3/12V/EXN STD	EXN	50	GX5.3	12	3 050	38	Flood	1 600	4 000	850	100



# MR11 & MR16 Lamps



**ACCUBEAM™ LAMPS** use an innovative reflector design that forms the light beam before it reaches the lens. The innovative corrugated reflector allows for greater light concentration at the centre of the beam giving a light output that is comparable to conventional halogen using less wattage.

ACCUBEAM was designed to deliver a smooth, precise beam pattern and allows for even light distribution; without hot spots or striations.



Order code	Description	Watts (W)	Base	Volts (V)	Beam angle (°)	Beam spread	CBCP (cd)	Average life (hrs)	Initial lumens (lm)	Case qty
<b>PAR20</b>										
MOL : 3 1/2 in. (83 mm)      Dia. : 2.5 in. (63.5 mm)										
150001	H50PAR20/NFL/5M/130V/STD ACC	50	E26	130	30	Narrow Flood	1 500	5 000	450	15
<b>PAR30</b>										
MOL : 3 3/4 in. (92 mm)      Dia. : 3 1/4 in. (95 mm)										
150008	H50PAR30/NFL/2.5M/120V/STD ACC	50	E26	120	30	Narrow Flood	1 850	2 500	600	15
150009	H50PAR30/NSP/5M/130V/STD ACC	50	E26	130	10	Narrow Spot	6 000	5 000	450	15
150007	H50PAR30/NFL/5M/130V/STD ACC	50	E26	130	30	Narrow Flood	1 850	5 000	450	15
150014	H75PAR30/NFL/2.5M/120V/STD ACC	75	E26	120	30	Narrow Flood	3 200	2 500	1 100	15
150015	H75PAR30/NSP/5M/130V/STD ACC	75	E26	130	10	Narrow Spot	9 000	5 000	825	15
150013	H75PAR30/NFL/5M/130V/STD ACC	75	E26	130	30	Narrow Flood	3 200	5 000	825	15
150011	H75PAR30/FL/5M/130V/STD ACC	75	E26	130	40	Flood	1 600	5 000	825	15
<b>PAR38</b>										
MOL : 5 1/16 in. (135 mm)      Dia. : 4 3/4 in. (121 mm)										
150066	H45PAR38/SP/5M/130V/STD ACC	45	E26SKT	130	10	Spot	7 000	5 000	390	15
150041	H45PAR38/FL/5M/130V/STD ACC	45	E26SKT	130	30	Flood	1 700	5 000	390	15
150101	H75PAR38/FL/5M/130V/STD ACC	75	E26SKT	130	30	Flood	3 300	5 000	825	15

<sup>1</sup>This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.



# ACCUBEAM™ Lamps

**J TYPE LAMPS** are double ended. STANDARD carries a vast selection of J lamps in T3 shape made of fine quality quartz glass.



T3 - 79 mm



T3 - 119 mm



T3 - 256 mm

Order code	Description	ANSI code	Watts (W)	Base	Volts (V)	Colour/Finish	Average life (hrs)	Initial lumens (lm)	MOL (in.) (mm)		Case qty
<b>T3 - 79 mm</b>											
55043	H60T3/79mm/CL/2M/R7S/130V/STD	N/A	60	R7s	130	Clear	2 000	880	12	79	12
57225	H75T3/79mm/2M/R7S/120V/STD	N/A	75	R7s	120	Clear	2 000	750	12	79	12
51042	H75T3/79mm/R7S/130V/STD	N/A	75	R7s	130	Clear	2 000	792	3 1/8	79	12
55047	H75T3/79mm/CL/2M/R7S/130V/JPN/STD	N/A	75	R7s	130	Clear	2 000	1 150	3 1/8	79	12
57361	H100T3/79MM/2M/R7S/120V/STD	N/A	100	R7s	120	Clear	2 000	1 300	3 1/8	79	50
51043	H100T3/79mm/2M/R7S/130V/STD	N/A	100	R7s	130	Clear	2 000	1 300	3 1/8	79	12
57224	H150T3/79mm/2M/R7S/120V/STD	N/A	150	R7s	120	Clear	2 000	2 400	3 1/8	79	50
51075	H150T3/79mm/2M/R7S/130V/STD	N/A	150	R7s	130	Clear	2 000	2 400	3 1/8	79	50
51120	H200T3/79mm/2M/R7S/130V/STD	N/A	200	R7s	130	Clear	2 000	3 400	3 1/8	79	50
<b>T3 - 119 mm</b>											
51086	H100T3/119mm/2M/R7S/130V/STD	N/A	100	R7s	130	Clear	2 000	1 300	4 11/16	119	50
50903	H150T3/119mm/2M/R7S/130V/STD	N/A	150	R7s	130	Clear	2 000	1 800	4 11/16	119	12
51044	H200T3/119mm/2M/R7S/130V/STD	N/A	200	R7s	130	Clear	2 000	3 400	4 11/16	119	50
51078	H300T3/119mm/CL/2M/R7S/120V/STD	EHM	300	R7s	120	Clear	2 000	5 950	4 11/16	119	12
15533	H300T3/2M/PB/130V	N/A	300	Pin Blade	130	Clear	2 000	5 400	4 11/16	119	50
51041	H300T3/119mm/CL/2M/R7S/130V/STD	FCL	300	R7s	130	Clear	2 000	5 950	4 11/16	119	12
51076	H500T3/119mm/CL/2M/R7S/120V/STD	DVS	500	R7s	120	Clear	2 000	10 500	4 11/16	119	12
51077	H500T3/119mm/CL/2M/R7S/130V/STD	N/A	500	R7s	130	Clear	2 000	10 500	4 11/16	119	12
<b>T3 - 190 mm</b>											
51046	H1000T3/190mm/CL/2M/R7S/130V/STD	S.O.	1 000	R7s	130	Claire	2 000	21 000	4 11/16	119	50
<b>T3 - High Voltage</b>											
59261	H300QT3/119mm/CL/2M/220V/STD	N/A	300	R7s	220	Clear	2 000	33 000	4 11/16	119	50
51047	H1000T3/190mm/CL/2M/R7S/240V/STD	DYD	1 000	R7s	240	Clear	2 000	21 000	7 15/32	190	12
51085	H1000T3/256mm/CL/2M/R7S/240V/STD	N/A	1 000	R7s	240	Clear	2 000	21 000	10 3/32	256	50
59262	H1500QT3/256mm/CL/2M/R7S/208V/STD	N/A	1 500	R7s	208	Clear	2 000	33 000	10 3/32	256	50
51049	H1500T3/256mm/CL/2M/R7S/240V/STD	N/A	1 500	R7s	240	Clear	2 000	26 400	10 3/32	256	50
59260	H1500QT3/256mm/CL/2M/277V/STD	N/A	1 500	R7s	277	Clear	2 000	33 000	10 3/32	256	50
<b>T3 - Low Voltage</b>											
55088	H150T3/79mm/2M/R7S/12V/STD	N/A	150	R7s	12	Clear	2 000	2 900	3 1/8	79	10
10154	H150T3/119mm/CL/2M/R7S/12V/STD	N/A	150	R7s	12	Clear	2 000	2 250	4 11/16	119	10
10318	H300T3/119mm/CL/2M/R7S/24V/STD	N/A	300	R7s	24	Clear	2 000	5 400	4 11/16	119	10
10319	H300T3/119mm/CL/2M/R7S/32V/STD	EHM	300	R7s	32	Clear	2 000	5 400	4 11/16	119	10
<b>T3 - Infrared</b>											
55077	H375T3/221mm/CL/IR/5M/R7S/120V/STD	N/A	375	R7s	120	Clear	5 000	N/A	8 11/16	221	42
55070	H500T3/221MM/CL/IR/5M/R7S/120V/STD	N/A	500	R7s	120	Clear	5 000	N/A	8 11/16	221	42
55071	H500T3/224mm/CL/IR/5M/ML/120V/STD	N/A	500	Metal Leads	120	Clear	5 000	N/A	8 13/16	224	42
55073	H1000T3/303mm/CL/IR/5M/ML/240V/STD	N/A	1 000	Metal Leads	240	Clear	5 000	N/A	11 15/16	303	42
55072	H1000T3/351MM/CL/IR/5M/ML/240V/STD	N/A	1 000	Metal Leads	240	Clear	5 000	N/A	13 13/16	351	42
55074	H1600T3/503MM/CL/IR/5M/ML/240V/STD	N/A	1 600	Metal Leads	240	Clear	5 000	N/A	19 13/16	503	42
55075	H2500T3/732mm/CL/IR/5M/ML/480V/STD	N/A	2 500	Metal Leads	480	Clear	5 000	N/A	28 13/16	732	42
55076	H3800T3/1062MM/CL/IR/5M/ML/570V/STD	N/A	3 800	Metal Leads	570	Clear	5 000	N/A	41 13/16	1 062	36



DIMMABLE

# J Type Double Ended Lamps



MR16 (GX5.3)



PAR20



PAR30



PAR38



Order code	Description	Watts (W)	Base	Volts (V)	Colour/Finish	Beam angle (°)	Beam spread	Average life (hrs)	Case qty
<b>PAR20</b>									
MOL : 3 9/32 in. (83 mm) Dia. : 2.5 in. (63.5 mm)									
55001*	H35PAR20/NFL/Y/2M/130V/STD	35	E26	130	Yellow	30	Narrow Flood	2 000	120
55002*	H35PAR20/NFL/G/2M/130V/STD	35	E26	130	Green	30	Narrow Flood	2 000	120
55004*	H35PAR20/NFL/B/2M/130V/STD	35	E26	130	Blue	30	Narrow Flood	2 000	120
<b>PAR30</b>									
MOL : 3 23/32 in. (93 mm) Dia. : 3 3/4 in. (95 mm)									
55005*	H50PAR30/FL/B/2M/130V/STD	50	E26	130	Blue	30	Flood	2 000	90
55006*	H50PAR30/FL/R/2M/130V/STD	50	E26	130	Red	30	Flood	2 000	90
55007*	H50PAR30/FL/G/2M/130V/STD	50	E26	130	Green	30	Flood	2 000	90
55008*	H50PAR30/FL/Y/2M/130V/STD	50	E26	130	Yellow	30	Flood	2 000	90
<b>PAR38</b>									
MOL : 5 9/16 in. (135 mm) Dia. : 4 3/4 in. (121 mm)									
51181*	H90PAR38/FL/B/2M/MS/130V/STD	90	E26SKT	130	Blue	30	Flood	2 000	15
51182*	H90PAR38/FL/G/2M/MS/130V/STD	90	E26SKT	130	Green	30	Flood	2 000	15
51183*	H90PAR38/FL/R/2M/MS/130V/STD	90	E26SKT	130	Red	30	Flood	2 000	15
51184*	H90PAR38/FL/Y/2M/MS/130V/STD	90	E26SKT	130	Yellow	30	Flood	2 000	15
<b>MR16</b>									
MOL : 1 25/32 in. (45 mm) Dia. : 2 in. (51 mm)									
55063	H50MR16/FL/BLUE/CG/4M/GX5.3/12V/STD	50	GX5.3	12	Blue	38	Flood	4 000	200
55064	H50MR16/FL/G/CG/4M/GX5.3/12V/STD	50	GX5.3	12	Green	38	Flood	4 000	200
55066	H50MR16/FL/R/CG/4M/GX5.3/12V/STD	50	GX5.3	12	Red	38	Flood	4 000	200
55067	H50MR16/FL/Y/CG/4M/GX5.3/12V/STD	50	GX5.3	12	Yellow	38	Flood	4 000	200

**COOL BEAM REFLECTOR LAMPS** have a dichroic coating that allows for the heat to be released through the back of the lamp; resulting in lower temperature in front of the lamp.

Cool Beam lamps are ideal for restaurants and other heat sensitive environments.

PAR30



PAR38



Order code	Description	Watts (W)	Base	Volts (V)	Colour temp. (K)	Beam angle (°)	Beam spread	CBCP (cd)	Average life (hrs)	Initial lumens (lm)	Case qty
<b>PAR30</b>											
MOL : 3 23/32 in. (93 mm) Dia. : 3 3/4 in. (95 mm)											
<sup>1</sup> 10145	H75PAR30/CLB/5M/130V/STD	75	E26	130	2 800	40	Flood	1 700	5 000	1 100	15
<b>PAR38</b>											
MOL : 5 9/16 in. (135 mm) Dia. : 4 3/4 in. (121 mm)											
<sup>1</sup> 10146	H60PAR38/CLB/5M/MS/130V/STD	60	E26SKT	130	2 900	36	Flood	1 700	5 000	800	15
<sup>1</sup> 51180	H90PAR38/CLB/5M/MS/130V/STD	90	E26SKT	130	2 900	36	Flood	3 000	5 000	1 140	15

<sup>1</sup>This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.



# Coloured & Cool Beam Lamps



**STANDARD** offers a full line of premium quality, professional grade reflector halogen lamps.



Order code	Description	Watts (W)	Base	Volts (V)	Colour temp. (K)	Beam angle (°)	Beam spread	CBCP (cd)	Average life (hrs)	Initial lumens (lm)	Case qty
<b>PAR16</b>											
MOL : 3 7/32 in. (82 mm)      Dia. : 2 in. (51 mm)											
50974	H40PAR16/NFL/2.5M/130V/STD	40	E26	130	2 800	30	Narrow Flood	530	2 500	400	120
50975	H60PAR16/NFL/2.5M/130V/STD	60	E26	130	2 800	30	Narrow Flood	1 100	2 500	650	120
<b>PAR20</b>											
MOL : 3 7/32 in. (82 mm)      Dia. : 2.5 in. (63.5 mm)											
51084	H35PAR20/NFL/2.5M/120V/STD	35	E26	120	2 800	30	Narrow Flood	630	2 500	315	15
51083	H35PAR20/NFL/5M/130V/STD	35	E26	130	2 800	28	Narrow Flood	630	5 000	235	15
<sup>1</sup> 50738	H50PAR20/NFL/2.5M/120V/STD	50	E26	120	2 800	28	Narrow Flood	1 050	2 500	550	15
<sup>1</sup> 51146	H50PAR20/NFL/5M/130V/STD	50	E26	130	2 800	28	Narrow Flood	1 050	5 000	410	15
<b>PAR30</b>											
MOL : 3 25/32 in. (93 mm)      Dia. : 3 3/4 in. (95 mm)											
<sup>1</sup> 10382	H50PAR30/NSP/5M/130V/STD	50	E26	130	2 800	13	Narrow Spot	5 000	5 000	495	15
<sup>1</sup> 10383	H50PAR30/NFL/5M/130V/STD	50	E26	130	2 800	30	Narrow Flood	2 000	5 000	495	15
<sup>1</sup> 10381	H50PAR30/FL/2.5M/120V/STD	50	E26	120	2 800	40	Flood	1 350	2 500	660	15
<sup>1</sup> 50739	H50PAR30/FL/5M/130V/STD	50	E26	130	2 800	40	Flood	1 350	5 000	495	15
<sup>1</sup> 50016	H75PAR30/NSP/2.5M/120V/STD	75	E26	120	2 800	10	Narrow Spot	8 000	2 500	1 100	90
<sup>1</sup> 10387	H75PAR30/NSP/5M/130V/STD	75	E26	130	2 800	13	Narrow Spot	8 000	5 000	825	15
<sup>1</sup> 10385	H75PAR30/FL/2.5M/120V/STD	75	E26	120	2 800	40	Flood	2 000	2 500	1 100	15
<sup>1</sup> 50740	H75PAR30/FL/5M/130V/STD	75	E26	130	2 800	40	Flood	2 000	5 000	825	15
<b>PAR30LN</b>											
MOL : 4 13/16 in. (122 mm)      Dia. : 3 3/4 in. (95 mm)											
<sup>1</sup> 50229	H50PAR30/LN/NSP/2.5M/120V/STD	50	E26	120	2 800	9	Narrow Spot	5 000	2 500	660	90
<sup>1</sup> 50084	H50PAR30/LN/NFL/5M/130V/STD	50	E26	130	2 800	25	Narrow Flood	2 000	5 000	495	15
<sup>1</sup> 10384	H50PAR30/LN/FL/2.5M/120V/STD	50	E26	120	2 800	40	Flood	1 350	2 500	660	15
<sup>1</sup> 50741	H50PAR30/LN/FL/5M/130V/STD	50	E26	130	2 800	40	Flood	1 350	5 000	495	15
<sup>1</sup> 50052	H75PAR30/LN/NSP/2.5M/120V/STD	75	E26	120	2 800	9	Narrow Spot	8 000	2 500	1 100	15
<sup>1</sup> 50051	H75PAR30/LN/NFL/2.5M/120V/STD	75	E26	120	2 800	25	Narrow Flood	2 400	2 500	1 100	90
<sup>1</sup> 10388	H75PAR30/LN/FL/2.5M/120V/STD	75	E26	120	2 800	40	Flood	2 000	2 500	1 100	15
<sup>1</sup> 50742	H75PAR30/LN/FL/5M/130V/STD	75	E26	130	2 800	40	Flood	2 000	5 000	825	15



<sup>1</sup>This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.

# Reflector Lamps

Order code	Description	Watts (W)	Base	Volts (V)	Colour temp. (K)	Beam angle (°)	Beam spread	CBCP (cd)	Average life (hrs)	Initial lumens (lm)	Case qty
<b>PAR36</b>											
MOL : 2 3/4 in. (70 mm)      Dia. : 4 1/2 in. (114 mm)											
15269	H36PAR36/NSP/4M/ST/12V	36	**ST G53	12	3 000	13	Narrow Spot	3 500	4 000	N/A	12
15268	H36PAR36/WFL/4M/ST/12V	36	**ST G53	12	2 950	30	Wide Flood	1 000	4 000	N/A	12
15271	H50PAR36/NSP/4M/ST/12V	50	**ST G53	12	3 050	8	Narrow Spot	10 000	4 000	400	12
<b>PAR38</b>											
MOL : 5 5/16 in. (135 mm)      Dia. : 4 3/4 in. (121 mm)											
150743	H45PAR38/FL/5M/MS/130V/STD	45	E26SKT	130	2 800	36	Flood	1 700	5 000	390	15
151109	H60PAR38/FL/5M/MS/130V/STD	60	E26SKT	130	2 800	36	Flood	1 800	5 000	585	15
150113	H75PAR38/FL/2.5M/MS/120V/STD	75	E26SKT	120	2 800	36	Flood	2 400	2 500	1 100	15
150744	H75PAR38/FL/5M/MS/130V/STD	75	E26SKT	130	2 800	36	Flood	2 400	5 000	825	15
151016	H90PAR38/FL/2.5M/MS/120V/STD	90	E26SKT	120	2 800	36	Flood	3 000	2 500	1 270	15
150745	H90PAR38/FL/5M/MS/130V/STD	90	E26SKT	130	2 800	36	Flood	3 000	5 000	950	15
151082	H120PAR38/FL/2.5M/MS/120V/STD	120	E26SKT	120	2 800	36	Flood	4 000	2 500	1 740	15
<b>PAR56</b>											
MOL : 4 7/16 in. (113 mm)      Dia. : 7 in. (173 mm)											
43494	Q500PAR56NSP	500	GX16d	120	2 950	32	Narrow Spot	96 000	4 000	8 000	6
43495	Q500PAR56MFL	500	GX16d	120	2 950	42	Flood	43 000	4 000	8 000	6
43496	Q500PAR56WFL	500	GX16d	120	2 950	66	Wide Flood	19 000	4 000	8 000	6
<b>PAR64</b>											
MOL : 6 1/2 in. (153 mm)      Dia. : 8 in. (203 mm)											
43497	Q1000PAR64NSP	1 000	GX16d (Ext.)	120	3 000	31	Narrow Spot	200 000	4 000	19 400	90
11190	Q1000PAR64MFL	1 000	GX16d (Ext.)	120	3 000	45	Flood	80 000	4 000	19 400	15
43499	Q1000PAR64/WFL	1 000	GX16d (Ext.)	120	3 000	72	Wide Flood	33 000	4 000	19 400	15

\*\*ST = Screw terminal

**ALR LAMPS** are halogen aluminium reflector lamps. They are a lightweight compact light source and are mainly used in display lighting, accent lighting, task lighting and elevator.



Order code	Description	ANSI code	Watts (W)	Base	Volts (V)	Colour temp. (K)	Colour/ Finish	Beam angle (°)	Beam spread	CBCP (cd)	Average life (hrs)	Initial lumens (lm)	Case qty
<b>ALR12 - Cover Glass</b>													
MOL : 1 17/32 in. (39 mm)      Dia. : 1 1/2 in. (38 mm)													
11068	20ALR12/NSP6-GBD	GBD	20	BA15d	12	3 000	Clear	6	Narrow Spot	7 000	2 000	250	50
55061	20ALR12/F/SP/BA15d/12V/GBE STD	GBE	20	BA15d	12	3 000	Frost	18	Spot	1 000	2 000	1 500	20
55062	20ALR12/F/FL/BA15d/12V/GBF STD	GBF	20	BA15d	12	3 000	Frost	32	Flood	400	2 000	750	20
<b>ALR18 - Cover Glass</b>													
MOL : 2 1/2 in. (57 mm)      Dia. : 2 1/4 in. (57 mm)													
55010	H50ALR18/SP/CL/DC/12V/GBJ STD	GBJ	50	BA15d	12	3 000	Clear	10	Spot	13 900	2 000	N/A	25
55011	H50ALR18/NFL/F/DC/12V/GBK STD	GBK	50	BA15d	12	3 000	Frost	25	Narrow Flood	1 900	2 000	N/A	50



# Reflector & ALR Lamps

# Halogen Lamps

Standard Products 

Standard Products Inc 

StandardProInc 

STANDARD Products Inc 

Standardproducts 

STANDARD Products Inc 

**STANDARD**<sup>®</sup>

[www.standardpro.com](http://www.standardpro.com)