

LED Tri-Proof Luminaire



Tri-proof LED luminaire: Corrosion, Water and Vandal proof.

A highly efficient robust lighting solution, rated at IP66 with a high impact resistance of IK10.


**Water/Dust
proof**



**Pressure
Proof**



**Corrosion
proof**

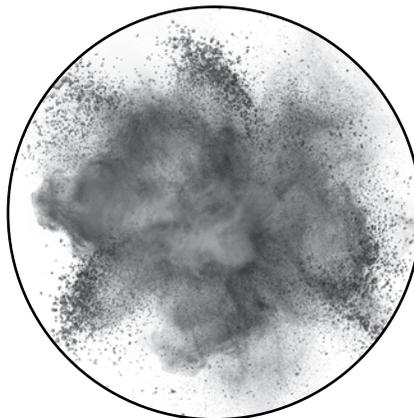

LED Tri-Proof Luminaire



Commonly used in applications such as industrial sites, commercial and public lighting. These LED luminaires are an eco-friendly alternative to traditional fluorescent lighting systems and will help you reduce your energy consumption **up to 59%**.

This luminaire balances high performance lighting while providing minimum glare.

Characteristics

- ▶ Long life of 50 000 hours
- ▶ 120-277 V
- ▶ 20 W & 40 W
- ▶ 4 000 K color temperature
- ▶ CRI 80
- ▶ Class 2
- ▶ 5 years warranty
- ▶ Wet location
- ▶ Surface or suspended mounting
- ▶ Resists to impacts up to IK10
- ▶ Operating temperature -20~40°C (-4~104°F)



Luminaire Specifications

Order code	Description	Volts (V)	Watts (W)	Initial lumens (lm)	Lumens per watt (lm/w)	Average life (hrs)	CRI	Color Temp. (K)	Beam angle (°)	Frequency (Hz)	Input Current (mA)
64173	LSVS/20W/2FT/40K/2/ND/FP/STD	120-277	20	1 900	95	50 000	80	4 000	120	50/60	180
64174	LSVS/40W/4FT/40K/2/ND/FP/STD	120-277	40	3 800	95	50 000	80	4 000	120	50/60	360

Mounting Accessorie (Steel Cables)

64175 LSVS/ACC/AIRCAB/STD



WET



INDOOR



OUTDOOR



COMMERCIAL



INDUSTRIAL



WAREHOUSE



IP66 COMPLIANT



5 YEARS WARRANTY



UL LISTED



DLC

64173 Depth: 2.48 in. (63 mm)



Length: 23.62 in. (600 mm)



Width: 3.27 in. (83 mm)

64174 Depth: 2.48 in. (63 mm)



Length: 47.25 in. (1 200 mm)



Width: 3.27 in. (83 mm)