


Projection - Projection

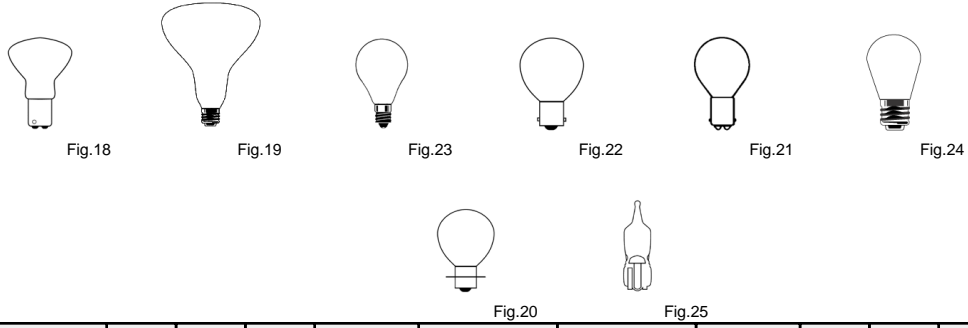

5

Line Ligne	ANSI Code ANSI	Primary Applications Primaires	Watts Puiss.	Volts Tension	Avg. Life (Hrs) Vie moy. (Hres)	Lamp Shape Forme lampe	Lamp Base Culot Lampe	M.O.L Inches - (mm) L.H.T.M. Pouces - (mm)	L.C.L. Inches - (mm) H.C.L. Pouces - (mm)	Filament	Colour Temp. Couleur (°K)	CBCP	Initial Lumens Initiaux	Operating Position Fonction.	Fig. # N° Fig.
------------	----------------	--------------------------------	--------------	---------------	---------------------------------	------------------------	-----------------------	--	---	----------	---------------------------	------	-------------------------	------------------------------	----------------

R-14
R-14

113	BDK	Reflector Photoflood	100	120	4	R-14	BA15d	2 11/16 (68.3)		CC-2V	3200	3200		HOR	18
114	EAL	Reflector Photoflood	500	120	15	R-40 F/G	E26	6 5/8 (168.3)		CC-2V	3200	6800		Any	19
115	DXB	Spot Beam	500	115-120	6	R-40	E26	6 5/8 (168.3)		CC-2V	3300	45000		Any	19
116	DXC	Flood Beam	500	115-120	6	R-40	E26	6 5/8 (168.3)		C-9	3300	5500		Any	19

S-11
S-11

117	BKR/ BJS	Viewer	30	115	50	S-11	E12	2 1/4 (57.2)	1 5/8 (41.3)	CC-2V	2775		400	Any	23
118	BEC	Fresnel Lens	150	120	25	S-11	BA15d	2 5/8 (66.7)	1 3/8 (35)	2CC-8	3075		3500	V-BD +/-30o	22
119	PH111A	Enlarger	75	125	25	S-11 W/B	BA15s	2 3/8 (60.5)	1 3/8 (35)	CC-2V	2900		1120	BDTH	22
120	BKV	Projection	30	115-120	50	S-11	BA15s	2 3/8 (60.5)	1 3/8 (35)	CC-2V	2775		400	Any	22
121	BLC	Projection	30	115-120	50	S-11	BA15d	2 3/8 (60.5)	1 3/8 (35)	CC-2V	2775		400	Any	21
122	BLR	Projection	50	115-125	50	S-11	BA15s	2 3/8 (60.5)	1 3/8 (35)	CC-2V	2850		780	BDTH	22
123	BLX	Projection	50	115-125	50	S-11	BA15d	2 3/8 (60.5)	1 3/8 (35)	CC-2V	2850		780	BDTH	21
124	BNF	Projection	75	115-125	25	S-11	BA15d	2 3/8 (60.5)	1 3/8 (35)	CC-2V	2900		1300	BDTH	21
125	BLK	Photocopy	30	120-130	50	S-11 F/G	E12	2 1/4 (57.2)		CC-2V	2700		400	Any	23

S-14
S-14

126	PH140	Enlarger	75	120	50	S-14 W/B	E26	3 3/8 (85.8)			2900		1150	Any	24
-----	-------	----------	----	-----	----	----------	-----	--------------	--	--	------	--	------	-----	----

S-8
S-8

127	BFX	Exciter	0.75	4	50	S-8	SC PF P15s	2 (50)	1 1/8 (28.5)	C-6			28		20
-----	-----	---------	------	---	----	-----	------------	--------	--------------	-----	--	--	----	--	----

T-2.25
T-2.25

128	ERK	Specialty Halogen	12	6	150	T-2.25H	Wedge	15/16 (23.8)	3/8 (9.5)	CC-6	3100		250	BDTH	25
-----	-----	-------------------	----	---	-----	---------	-------	--------------	-----------	------	------	--	-----	------	----