


PUSHBUTTON HOLE PLUGS

Metal pushbutton hole plugs

The **880 HP** pushbutton hole plugs are made to cover the unused holes on the pushbutton enclosures. They are fixed with an anti-vibration wing nylon lock. Plugs are available for several hole sizes in gray (ASA 61) powder painted steel or brushed #4 stainless steel and come complete with a dust tight oil resistant gasket and installation hardware. **CSA Certified / UL Listed.** **NEMA/EEMAC 4-12 IP66 (Galvanized)** **NEMA/EEMAC 4X IP66 (Stainless steel)**

CATALOG NUMBER		SPECIFICATIONS			
STEEL	STAINLESS	HOLE PLUG	A	B	C
880 HP1	880 HP1SS	22.5mm pushbutton	1.218	0.968	0.875
880 HP0500	880 HP0500SS	1/2" conduit hole	1.375	1.125	0.875
880 HP0750	880 HP0750SS	3/4" conduit hole	1.562	1.312	1.062
880 HP2	880 HP2SS	30.5mm pushbutton	1.750	1.500	1.203
880 HP1000	880 HP1000SS	1" conduit hole	1.875	1.625	1.344
880 HP1250	880 HP1250SS	1 1/4" conduit hole	2.187	1.937	1.687
880 HP1500	880 HP1500SS	1 1/2" conduit hole	2.500	2.250	1.968
880 HP2000	880 HP2000SS	2" conduit hole	3.000	2.750	2.468
880 HP2500	---	2 1/2" conduit hole	3.500	3.250	3.000
880 HP3000	---	3" conduit hole	4.125	3.875	3.625
880 HP3500	---	3 1/2" conduit hole	4.625	4.375	4.125
880 HP4000	---	4" conduit hole	5.125	4.875	4.625

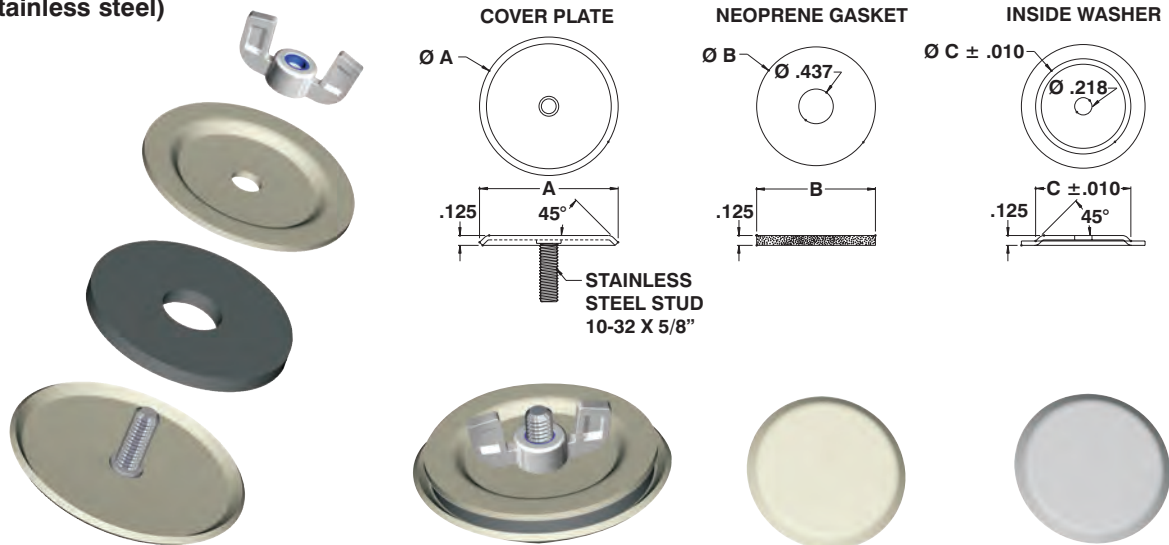

Plastic plug buttons

The **880 HPPL** plastic plug buttons are made to cover the unused pushbutton holes on the pushbutton enclosures. Hole plugs are available for standard or miniature holes in black plastic.



CATALOG NUMBER	SPECIFICATION	SHIP WGHT LBS.
880 HP1PL	22.5mm pushbutton	1
880 HP2PL	30.5mm pushbutton	1
880 HP3PL	76.2mm pushbutton	1

Anti-vibration wing nut

The **880 HDWN** anti-vibration wing nuts are designed to be used when particular types of M5 fasteners need to be tightened or loosened frequently without the use of tools. It has a nylon insert to capture the bolt or screw which provides a locking feature.



CATALOG NUMBER	THREAD	SHIP WGHT LBS.
880 HDWN	M5 (metric)	1

Data subject to change without notice.