


**Available finishes**

Use **BOLD** color code in model number (Example: SC-1-**PL**)

Gloss finishes

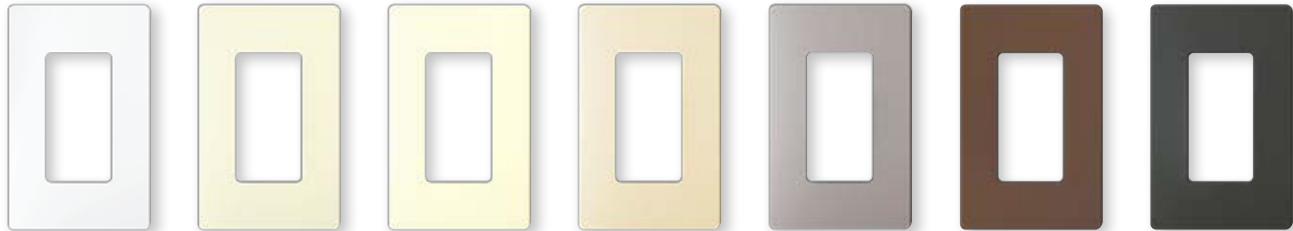

**WH**  
White

**LA**  
Light Almond

**AL**  
Almond


**IV**  
Ivory

**GR**  
Gray

**BR**  
Brown

**BL**  
Black

Satin finishes

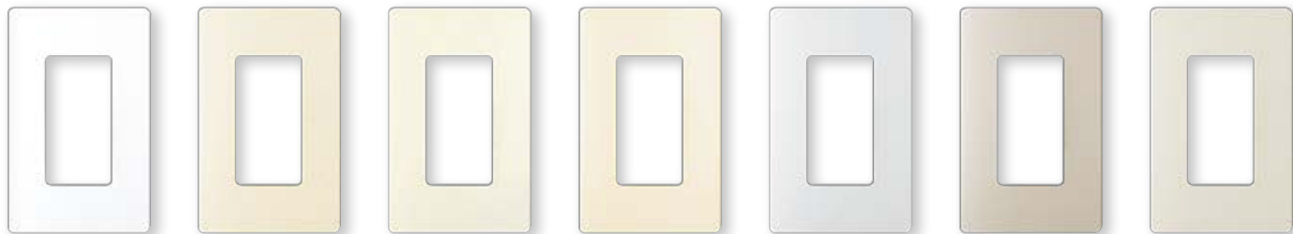

**SW**  
Snow

**LS**  
Limestone


**BI**  
Biscuit

**ES**  
Eggshell

**PD**  
Palladium

**TP**  
Taupe

**ST**  
Stone

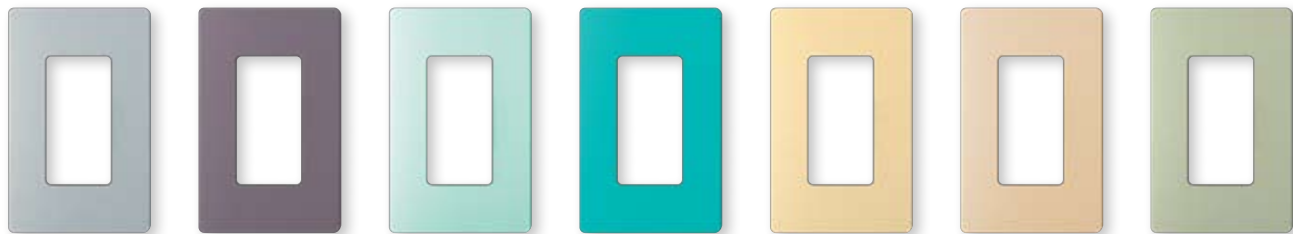

**BG**  
Bluestone

**PL**  
Plum


**SG**  
Sea Glass

**TQ**  
Turquoise

**GS**  
Goldstone

**DS**  
Desert Stone

**GB**  
Greenbriar

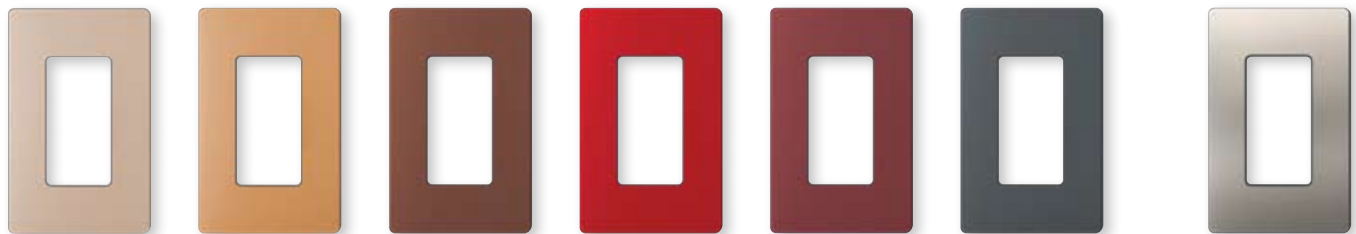

**MS**  
Mocha Stone

**TC**  
Terracotta

**SI**  
Sienna

**HT**  
Hot


**MR**  
Merlot

**MN**  
Midnight

**SS**  
Stainless Steel\*

\*Stainless Steel finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Wallplates for Maestro®, Maestro IR®, Maestro Wireless®, Pico™ wireless control, Spacer System®, Diva®, Lyneo® Lx, Skylark® and Skylark Contour™



1-gang\*

CW-1-**CC**<sup>2</sup>  
SC-1-**CC**<sup>4</sup>


W: 2.94 in (75 mm); H: 4.69 in (119 mm)  
D: .30 in (7.6 mm)



4-gang\*

CW-4-**CC**<sup>2</sup>  
SC-4-**CC**<sup>4</sup>


W: 8.37 in (213 mm); H: 4.69 in (119 mm);  
D: .30 in (7.6 mm)



2-gang\*

CW-2-**CC**<sup>2</sup>  
SC-2-**CC**<sup>4</sup>

W: 4.75 in (121 mm); H: 4.69 in (119 mm);  
D: .30 in (7.6 mm)

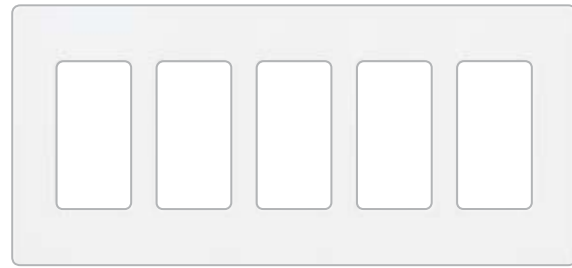

5-gang\*

CW-5-**CC**<sup>2</sup>  
SC-5-**CC**<sup>4</sup>

W: 10.18 in (259 mm); H: 4.69 in (119 mm);  
D: .30 in (7.6 mm)



3-gang\*

CW-3-**CC**<sup>2</sup>  
SC-3-**CC**<sup>4</sup>

W: 6.56 in (167 mm); H: 4.69 in (119 mm);  
D: .30 in (7.6 mm)

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox, see Application Note #213 (Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box) at [www.lutron.com/applicationnotes](http://www.lutron.com/applicationnotes).

**CC**<sup>2</sup>: Gloss and Stainless Steel color codes, see pg. 161

**CC**<sup>4</sup>: Satin color codes, see pg. 161

Multi-gang dimmer installations may require derating, see pg. 170.

\*Stainless Steel finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.



6-gang\* CW-6-**CC**<sup>2</sup>  
SC-6-**CC**<sup>4</sup>

W: 12.00in (305mm); H: 4.69in (119mm);  
D: .30in (7.6mm)

**Cable jacks**



- F-style, 75-Ohm coaxial cable

Single cable jack\* CA-CJH-**CC**<sup>3</sup>  
SC-CJ-**CC**<sup>4</sup>

**Telephone jacks**



- 6-conductor telephone jack, RJ11

Single telephone jack\* CA-PJH-**CC**<sup>3</sup>  
SC-PJ-**CC**<sup>4</sup>

**CC**<sup>2</sup>: Gloss and Stainless Steel color codes, see pg. 161

**CC**<sup>3</sup>: Gloss color codes, see pg. 161

**CC**<sup>4</sup>: Satin color codes, see pg. 161

**Receptacles**



**Tamper resistant receptacles**

15A, 125V*	CARS-15-TR- <b>CC</b> <sup>3</sup> SCRS-15-TR- <b>CC</b> <sup>4</sup>
20A, 125V*	SCRS-20-TR- <b>CC</b> <sup>4</sup>

**Receptacles**

15A, 125V*	CAR-15H- <b>CC</b> <sup>3</sup> SCR-15- <b>CC</b> <sup>4</sup>
20A, 125V*	SCR-20- <b>CC</b> <sup>4</sup>

**GFCI Receptacles**



- Press test button to confirm LED indicator status
- Press reset button to reset GFCI after circuit interruption

**Tamper resistant GFCI receptacles**

15A, 125V*	GFCI	CAR-15-GFTR- <b>CC</b> <sup>3</sup> SCR-15-GFTR- <b>CC</b> <sup>4</sup>
20A, 125V*	GFCI	SCR-20-GFTR- <b>CC</b> <sup>4</sup>

\*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

**Receptacles for dimming use**



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use

**Duplex for dimming use**

15 A	120/125V*	CAR-15-DFDU- <b>CC</b> <sup>2</sup>
15 A	120/125V*	SCR-15-DFDU- <b>CC</b> <sup>4</sup>
20 A	120/125V*	CAR-20-DFDU- <b>CC</b> <sup>2</sup>
20 A	120/125V*	SCR-20-DFDU- <b>CC</b> <sup>4</sup>

**Receptacles for dimming use**



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs

**Split duplex (half for dimming use)**

15 A	120/125V*	CAR-15-HFDU- <b>CC</b> <sup>2</sup>
15 A	120/125V*	SCR-15-HFDU- <b>CC</b> <sup>4</sup>
20 A	120/125V*	CAR-20-HFDU- <b>CC</b> <sup>2</sup>
20 A	120/125V*	SCR-20-HFDU- <b>CC</b> <sup>4</sup>

**Receptacles for dimming use**



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use
- 15 A model shown
- Tamper resistant shutter mechanism

**Dual dimming tamper resistant**

15 A	120/125V*	CAR-15-DDTR- <b>CC</b> <sup>2</sup>
15 A	120/125V*	SCR-15-DDTR- <b>CC</b> <sup>4</sup>
20 A	120/125V*	CAR-20-DDTR- <b>CC</b> <sup>2</sup>
20 A	120/125V*	SCR-20-DDTR- <b>CC</b> <sup>4</sup>

**Receptacles for dimming use**



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs
- 15 A model shown
- Tamper resistant shutter mechanism

**Half dimming tamper resistant**

15 A	120/125V*	CAR-15-HDTR- <b>CC</b> <sup>2</sup>
15 A	120/125V*	SCR-15-HDTR- <b>CC</b> <sup>4</sup>
20 A	120/125V*	CAR-20-HDTR- <b>CC</b> <sup>2</sup>
20 A	120/125V*	SCR-20-HDTR- <b>CC</b> <sup>4</sup>

**CC**<sup>2</sup>: Gloss color code and Stainless Steel, see pg. 161

**CC**<sup>4</sup>: Satin color codes, see pg. 161

\*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.