Condulet® Outlet Boxes -Cast Iron or Aluminum

Covers and Gaskets

Applications:

VXF and GRF cast outlet boxes are installed in threaded rigid conduit systems to:

- · Act as junction boxes
- · Act as pull outlets
- Accept round base wiring devices and covers intended for use on 4" outlet boxes (GRF boxes only)
- Act as ceiling or wall mounting for Vaporgard™ lighting fixtures (VXF boxes)
- Mount enclosed and gasketed lighting fixtures: Series ARB and VGR; Series ARB fixture hangers (GRF boxes)

Features VXF:

- Compact, shallow design
- · Takes GRF covers
- Multiple tapped conduit openings and pipe plugs for versatility
- 4 hubs and 3 plugs on VXF10 and VXF20
- 5 hubs and 4 plugs on VXFT10 and VXFT20

Features GRF:

- Surface mounting. Flush mounting can be obtained by nailing box to concrete form through mounting lug
- · Drilled mounting lugs
- Four conduit bosses spaced 90° apart on sides and one boss on back
- Blank or drilled and tapped bodies (with 4 side bosses tapped and plugged, plus blank back boss)

Certifications and Compliances:

- UL Standard: boxes and covers 514A
- CSA Standard: C22.2

Standard Materials:

- VXF copper-free aluminum
- GRF Feraloy[®] iron alloy or copper-free aluminum

Standard Finishes:

- VXF epoxy enamel
- GRF electrogalvanized and aluminum acrylic paint

Options:

Description	Suffix
GRF bodies and covers - hot	
dipped galvanized	HDG

VXF Tapped Surface With Lugs



4 Hubs, 3 Plugs		
Hub Size	Cat. #	
1/2	VXF10	
3/,	VYE20	

Surface With Lugs 5 Hubs, 4 Plugs

Hub Size	Cat. #	
1/2	VXFT10	
3/4	VXFT20	

GRF Blank Surface With Lugs



Inside Depth	Cat. #
13/8	GRF19
1 15/ ₁₆	GRF29
31/8	GRF39

GRFX Tapped Surface With Lugs



4 Hubs, 3 Plugs Blank Back Boss

Depth	Tap	Cat. #	Cat. #
13/8	1/2	GRFX119	GRF119
1 3/8	3/4	GRFX219	GRF219
21/16	1/2	GRFX129	GRF129
21/16	3/4	GRFX229	GRF229
21/16	1	GRFX329	GRF329
31/8	1/2	GRFX139	GRF139
31/8	3/4	GRFX239	GRF239
31/8	1	GRFX339	GRF339

GRF Blank Cover



	Iron	Aluminum
Description	Cat. #	Cat. #
Surface	GRF10	GRF110

GRF Hub Covers



Fixture weight to 125 lbs.

Description	Size	Iron Cat. #	Aluminum Cat. #
Surface	1/2	GRF11	GRF11 SA
Surface	3/4	GRF12	GRF12 SA


GRF Gasket



Description	Cat. #
Neoprene	GASK643

Dimensions

In Inches:

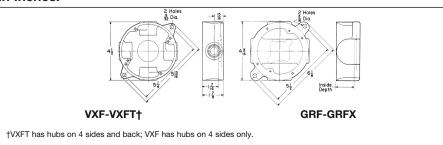

See lighting section 7L for complete listing of lighting fixtures and hangers.