


## CSA Transfer Switches

# GENERAC®

## CSA Approved Service Rated Automatic Transfer Switches

100 & 200 Amps

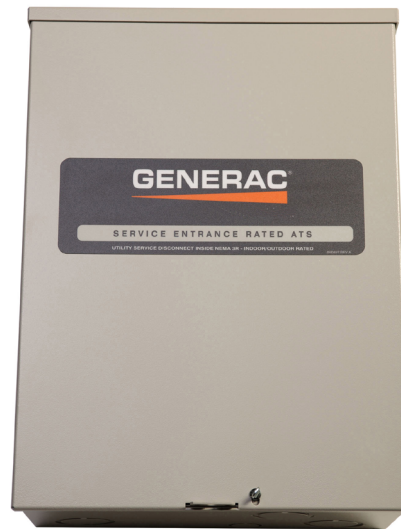

## DESCRIPTION

Generac is proud to offer the first ever, CSA approved service rated transfer switches for Canadian use. These switches use patented technology to allow for use in whole house applications in Canada. The switches are available in 100 and 200 amp ratings for single phase applications. The switches employ CUL rated circuit breakers on the utility side of the transfer contactor for full downstream protection. The aluminum enclosure is rated for NEMA/UL Type 3R installation and is fully protected from the elements.

## STANDARD FEATURES

Both transfer switches are housed in an aluminum NEMA/UL Type 3R enclosure, with electrostatically applied and baked powder paint. The Heavy Duty Generac Contactor is a UL recognized device, designed for years of service. The controller at the generator handles all the timing, sensing, exercising functions, and transfer commands.

# GENERAC®



# 100-200 Amps

# CSA Approved Service Rated Transfer Switches

## Functions

All timing and sensing functions originate in the generator controller

Utility voltage drop-out.....	<60%
Timer to generator start.....	10 second factory set, adjustable between 2-1500 seconds by a qualified dealer*
Engine warm up delay.....	5 seconds
Standby voltage sensor.....	.60% for 5 seconds
Utility voltage pickup.....	>80%
Re-transfer time delay.....	15 seconds
Engine cool-down timer.....	60 seconds
Exerciser.....	12 minutes every 7 days

The transfer switch can be operated manually without power applied.

\*When used in conjunction with units utilizing Evolution™ controls

## Specifications


Model	RTSE100A3CSA	RTSE200A3CSA
Amps	100	200
Voltage	120/240, 1Ø	120/240, 1Ø
Load Transition Type (Automatic)	Open Transition Service Rated	Open Transition Service Rated
Enclosure Type	NEMA/UL 3R	NEMA/UL 3R
Withstand Rating (Amps)	10,000	22,000
Lug Range	1/0 - #14	350 MCM - #6

## Features


- Electrically operated, mechanically-held contacts for fast, positive connections.
- Rated for all classes of load, 100% equipment rated, both inductive and resistive.
- 2 pole, 250 VAC contactor.
- 160 millisecond transfer time.
- Dual coil design.
- Main contacts are silver plated or silver alloy to resist welding and sticking.
- NEMA/UL 3R (indoor/outdoor rated) aluminum enclosure is standard.
- Limited 5 Year Warranty

## Dimensions

**100 Amp Switch**

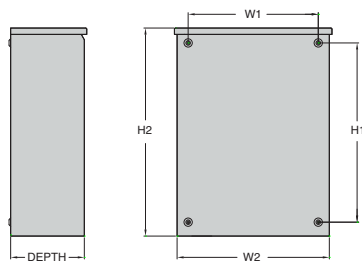

**200 Amp Switch**

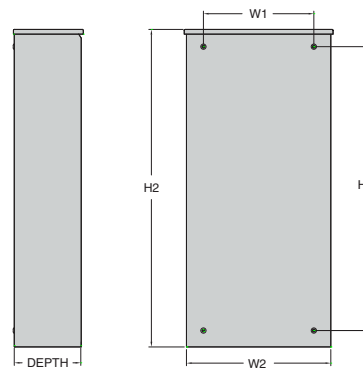

Amps	100					200				
	Height		Width		Depth	Height		Width		Depth
	H1	H2	W1	W2		H1	H2	W1	W2	
Inches	16.3	20.2	11.8	14.6	7.1	26	30	12.5	16	7.1
mm	414	513.1	299.7	370.8	180.3	660.4	762	317.5	406.4	180.3
Unit Weight – lbs.	21					38.5				
kilos	9.53					17.46				