

## TYPE PIK


### Features

- Pre-insulated nylon jacket
- Dual-rated
- Color coded end caps
- Anchoring rings inside jacket
- Rated for 600 volts

### Benefits

- Provides protection against moisture, extended shelf life and crimpability at sub-zero temperatures
- For aluminum to copper or aluminum to aluminum
- Provides for ease of wire size identification (conforms to industry standards) and also prevents dirt and other contaminants from entering the connector prior to use
- Holds connector insert in place during installation
- Ensures reliability

EN\_10625482.pdf

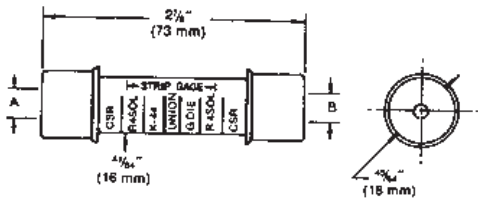

Catalog Number	A Range			Wire Diameter Range in Inches	Cap Color	B Range			Wire Diameter Range in Inches	Cap Color	Die Index
	ACSR	Alum. or Copper Str.	Copper Sol.			ACSR	Alum. or Copper Str.	Copper Sol.			
PIK-88	-	10	8	.116-.128	Brown	-	10	8	.116-.128	Brown	5/8 or BG
PIK-68	-	8	8	.145-.162	Green	-	10	8	.116-.128	Brown	5/8 or BG
PIK-66	-	8	8	.145-.162	Green	-	8	6	.145-.162	Green	5/8 or BG
PIK-48	6-6/1	5-6	4	.184-.206	Blue	-	10	8	.116-.128	Brown	5/8 or BG
PIK-46	6-6/1	5-6	4	.184-.206	Blue	-	8	6	.116-.128	Green	5/8 or BG
PIK-44	6-6/1	5-6	4	.184-.206	Blue	6-6/1	5-6	4	.116-.128	Blue	5/8 or BG
PIK-28	4-6/1, 7/1	3-4	2	.232-.260	Orange	-	10	8	.116-.128	Brown	5/8 or BG
PIK-26	4-6/1, 7/1	3-4	2	.232-.260	Orange	-	8	6	.145-.162	Green	5/8 or BG
PIK-24	4-6/1, 7/1	3-4	2	.232-.260	Orange	6-6/1	5-6	4	.184-.206	Blue	5/8 or BG
PIK-22	4-6/1, 7/1	3-4	2	.232-.260	Orange	4-6/1, 7/1	3-4	2	.232-.260	Orange	5/8 or BG
PIK-18	2-6/1, 7/1	1-2	-	.292-.332	Red	-	10	8	.116-.128	Brown	5/8 or BG
PIK-16	2-6/1, 7/1	1-2	-	.292-.332	Red	-	8	6	.145-.162	Green	5/8 or BG
PIK-14	2-6/1, 7/1	1-2	-	.292-.332	Red	6-6/1	5-6	4	.184-.206	Blue	5/8 or BG
PIK-12	2-6/1, 7/1	1-2	-	.292-.332	Red	4-6/1, 7/1	3-4	2	.232-.260	Orange	5/8 or BG
PIK-11	2-6/1, 7/1	1-2	-	.292-.332	Red	2-6/1, 7/1	1-2	-	.292-.332	Red	5/8 or BG
PIK-08	-	1/0	-	.373	Yellow	-	10	8	.116-.128	Brown	5/8 or BG
PIK-06	-	1/0	-	.373	Yellow	-	8	6	.145-.162	Green	5/8 or BG
PIK-04	-	1/0	-	.373	Yellow	6-6/1	5-6	4	.184-.206	Blue	5/8 or BG
PIK-02	-	1/0	-	.373	Yellow	4-6/1, 7/1	3-4	2	.232-.260	Orange	5/8 or BG
PIK-01	-	1/0	-	.373	Yellow	2-6/1, 7/1	1-2	-	.292-.332	Red	5/8 or BG
PIK-00	-	1/0	-	.373	Yellow	-	1/0	-	.373	Yellow	5/8 or BG