

Turnlok® Plugs & Connectors

IP20
Suitability



CRL1420C



L1430P



L1630P



CS8464



CS8165

CATALOG NUMBER	GCM CATALOG NUMBER	RATING		DESCRIPTION/COLOR	NEMA CONFIG. NO.	3RD PARTY COMPLIANCE		
		A.	V.			UL 498	FSUL WC596	CSA
20 Amp NEMA L1420, L1520 & L1620 3 Pole, 4 Wire (Cord Diameter .225" – 1.150")								
L1420C	L1420CGCM	20	125/250	Connector, Black Back, White Front Body	L14-20R	•	•	•
CRL1420C		20	125/250	Connector, Yellow Back, White Front Body, Corr.-Resist.	L14-20R	•	•	•
L1520C		20	3Ø,250	Connector, Black Back, White Front Body	L15-20R	•	•	•
L1620C		20	3Ø,480	Connector, Black Back, White Front Body	L16-20R	•	•	•
L1420P	L1420PGCM	20	125/250	Plug, Black Back, White Front Body	L14-20P	•	•	•
CRL1420P		20	125/250	Plug, Yellow Back, White Front Body, Corr.-Resist.	L14-20P	•	•	•
L1520P		20	3Ø,250	Plug, Black Back, White Front Body	L15-20P	•	•	•
L1620P		20	3Ø,480	Plug, Black Back, White Front Body	L16-20P	•	•	•
30 Amp NEMA L1430 & L1530 3 Pole, 4 Wire (Cord Diameter .225" – 1.150")								
L1430C	L1430CGCM	30	125/250	Connector, Black Back, White Front Body	L14-30R	•	•	•
CRL1430C		30	125/250	Connector, Yellow Back, White Front Body, Corr.-Resist.	L14-30R	•	•	•
L1530C		30	3Ø,250	Connector, Black Back, White Front Body	L15-30R	•	•	•
L1430P	L1430PGCM	30	125/250	Plug, Black Back, White Front Body	L14-30P	•	•	•
CRL1430P		30	125/250	Plug, Yellow Back, White Front Body, Corr.-Resist.	L14-30P	•	•	•
L1530P		30	3Ø,250	Plug, Black Back, White Front Body	L15-30P	•	•	•
30 Amp NEMA L1630 & L1730 3 Pole, 4 Wire (Cord Diameter .225" – 1.150")								
L1630C		30	3Ø,480	Connector, Black Back, White Front Body	L16-30R	•	•	•
L1730C		30	3Ø,600	Connector, Black Back, White Front Body	L17-30R	•	•	•
L1630P		30	3Ø,480	Plug, Black Back, White Front Body	L16-30P	•	•	•
L1730P		30	3Ø,600	Plug, Black Back, White Front Body	L17-30P	•	•	•
California Standard & Corrosion-Resistant, 3 Wire Grounding (Cord Diameter .680" – 1.125")								
CR6360		50	125	Connector, Corrosion-Resistant		•		•
CS6360		50	125	Connector, California Standard		•		•
CS8264		50	250	Connector, California Standard		•		•
CS8464		50	480	Connector, California Standard		•		•
3762		50	250VDC. 600VAC	Connector, Corrosion-Resistant		•		•
CR6361		50	125	Plug, Corrosion-Resistant		•		•
CS6361		50	125	Plug, California Standard		•		•
CS8265		50	250	Plug, California Standard		•		•
CS8465		50	480	Plug, California Standard		•		•
3763M		50	250VDC. 600VAC	Plug, Corrosion-Resistant		•		•
California Standard & Corrosion-Resistant, 4 Wire Grounding (Cord Diameter .680" – 1.125")								
CR6364		50	125/250	Connector, Corrosion-Resistant		•		•
CS6364		50	125/250	Connector, California Standard		•		•
CS8364		50	3Ø,250	Connector, California Standard		•		•
CS8164		50	3Ø,480	Connector, California Standard		•		•
3764		50	250VDC. 600VAC	Connector, Corrosion-Resistant		•		•
7764**		50	250VDC. 600VAC	Connector, Corrosion-Resistant		•		•
CR6365		50	125/250	Plug, Corrosion-Resistant		•		•
CS6365		50	125/250	Plug, California Standard		•		•
CS8365		50	3Ø,250	Plug, California Standard		•		•
CS8165		50	3Ø,480	Plug, California Standard		•		•
3765		50	250VDC. 600VAC	Plug, Corrosion-Resistant		•		•
7765**		50	250VDC. 600VAC	Plug, Corrosion-Resistant		•		•

*AC Only

**Devices for replacement use only in existing installations.

See NEMA Configuration chart on inside back cover.

Ready to wire, ready to perform

READY TO BOOST PRODUCTIVITY.

Extra-Hard Use Specification Grade Plugs & Connectors

- Get superior durability in commercial and industrial use — a great choice for tools, extension cords, machines, and lighting
- Nylon housing for superior impact and chemical resistance

Color-coded terminal screws positioned on the same plane and backed out for fast, reliable installation.

Double-wipe, firm-grip ground contact and triple-wipe power contacts guarantee superior connections.

Recessed cord-grip screw reduces screw-driver slippage and enhances safety.

Quick-thread assembly screws and cord-grip screws come backed out and ready to wire.

Industrial-strength, brass alloy plug blades and connector contacts resist heat rise and provide excellent conductivity.


Single Plane Wiring engineered for speed — backed out and ready to wire.

See-through, thermoplastic terminal chamber for clear views of terminals and wire connections.


Rugged, external, two-piece cord grip with offset jaws provides uniform pressure for superior conductor retention.



PS5269X

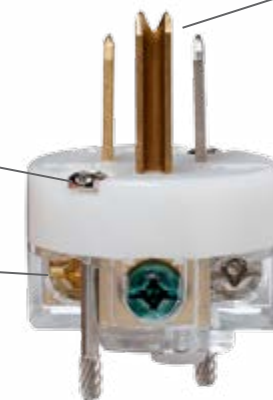

PS5266X



Extra-Hard Use Ground Continuity Monitoring (GCM) Plugs & Connectors

- Superior durability in commercial and industrial use
- Integral, continuous ground continuity and power-status indication enhances safety

PS5266XGCM, PS5269XGCM



Rubber Watertight Plugs & Connectors

- Rugged performers for commercial or industrial wet indoor or outdoor use with shop tools, machines and extension cords
- Rubber dust-tight and watertight body provides chemical resistance



14W47



Clamp-Lock™ Plugs & Connectors

- Installs 3x faster than conventional connections
- Color-coded levers enable terminal identification and reduce the chance of wiring errors
- Speedy, patented cam-lever termination provides solid, dependable connections

PS515PCLB, PS515CCLB



Rubber Dust-Tight Plugs & Connectors

- Rugged choices for commercial or industrial dry outdoor use with shop tools and extension cords
- Rubber dust-tight body provides chemical resistance
- Clamping cord grip provides excellent conductor retention

1447



Medium-Duty Plugs & Connectors


- Reliable choices for residential and light commercial tool and extension cord use
- Open terminal provides visual confirmation of correct termination

4867Y, 5276BK

MaxGrip M³ Plugs & Connectors

- Tough, nylon construction delivers crush and impact resistance that exceeds hospital grade and Fed Spec requirements
- Self-hinge body swings wide open to enable fast, tight, clean connections

PS5969Y, PS5965Y



Straight Blade Plugs & Connectors

IP20
Suitability



PS5266X



PS5269X



PS5266SSAN



PS5266XHG




PS5269XHG



PS5266XGCM



PS5269XGCM



5276BK

Catalog Number	Rating		Description	NEMA Config. No.
	A.	V.		
Extra-Hard Use (EHU) – Specification Grade** (Cord Diameter .230" – .720")				
PS5266X*	15	125	Plug, Black & Gray	5-15P
CR5266X	15	125	Plug, Corrosion-Resistant, Yellow & White	5-15P
PS5269X*	15	125	Connector, Black & Gray	5-15R
CR5269X	15	125	Connector, Corrosion-Resistant, Yellow & White	5-15R
PS5366X	20	125	Plug, Black & White	5-20P
PS5369X	20	125	Connector, Black & White	5-20R
PS5666X	15	250	Plug, Black & White	6-15P
PS5669X	15	250	Connector, Black & White	6-15R
PS5466X	20	250	Plug, Black & White	6-20P
PS5469X	20	250	Connector, Black & White	6-20R
PS5766X	15	277	Plug, Black & White	7-15P
PS5866X	20	277	Plug, Black & White, Cord Diameter .385" – 1.150"	7-20P
Extra-Hard Use (EHU) – Specification Grade Angle Plugs** (Cord Diameter .320" – .655")				
PS5266SSAN	15	125	Plug, Black & White	5-15P
PS5366SSAN	20	125	Plug, Black & White	5-20P
PS5666SSAN	15	250	Plug, Black & White	6-15P
PS5466SSAN	20	250	Plug, Black & White	6-20P
*Available in Gray (add GRY to part #) or Black (add BK to part #) interior.				
Extra-Hard Use (EHU) – Hospital Grade** (Cord Diameter .230" – .720")				
PS5266XHG	15	125	Plug, Black & Clear	5-15P
PS5269XHG	15	125	Connector, Black & Clear	5-15R
PS5366XHG	20	125	Plug, Black & Clear	5-20P
PS5369XHG	20	125	Connector, Black & Clear	5-20R
PS5666XHG	15	250	Plug, Black & Clear	6-15P
PS5669XHG	15	250	Connector, Black & Clear	6-15R
PS5466XHG	20	250	Plug, Black & Clear	6-20P
PS5469XHG	20	250	Connector, Black & Clear	6-20R
Extra-Hard Use (EHU) – Hospital Grade Angle Plugs** (Cord Diameter .320" – .655")				
PS5266HGAN	15	125	Plug, Black & Clear	5-15P
PS5366HGAN	20	125	Plug, Black & Clear	5-20P
PS5666HGAN	15	250	Plug, Black & Clear	6-15P
PS5466HGAN	20	250	Plug, Black & Clear	6-20P
Extra-Hard Use (EHU) – Ground Continuity Monitoring (GCM)** (Cord Diameter .230" – .720")				
PS5266XGCM	15	125	Plug, Black & Clear	5-15P
PS5269XGCM	15	125	Connector, Black & Clear	5-15R
PS5366XGCM	20	125	Plug, Black & Clear	5-20P
PS5369XGCM	20	125	Connector, Black & Clear	5-20R
PS5666XGCM	15	250	Plug, Black & Clear	6-15P
PS5669XGCM	15	250	Connector, Black & Clear	6-15R
PS5466XGCM	20	250	Plug, Black & Clear	6-20P
PS5469XGCM	20	250	Connector, Black & Clear	6-20R
Dead Front (Cord Diameter .230" – .655")				
5276BK	15	125	Plug, Black	5-15P
5269BK	15	125	Connector, Black	5-15R
5765BK	20	125	Plug, Black	5-20P
5374BK	20	125	Connector, Black	5-20R
5666BK	15	250	Plug, Black	6-15P
5669BK	15	250	Connector, Black	6-15R
5864BK	20	250	Plug, Black	6-20P
5866BK	20	250	Connector, Black	6-20R

UL US Compliant

FSUL WC596 Compliant

Straight Blade Plugs & Connectors



4867Y



PS5965Y



PS59650



PS5969Y



PS59690



1447



14W47

Catalog Number	Rating		Description	NEMA Config. No.
	A.	V.		
Medium Duty¹ (Cord Diameter .250" - .600")				
4867Y	15	125	Plug, Yellow	5-15P
4887Y	15	125	Connector, Yellow	5-15R

Hospital Grade MaxGrip[®] M³⁺⁺ (Cord Diameter .230" - .720")				
PS81156GRY	15	125	Hospital Grade Plug, Gray	5-15P
PS81196GRY	15	125	Hospital Grade Connector, Gray	5-15R

MaxGrip M³⁺ (Cord Diameter .230" - .720")				
PS5965Y	15	125	Plug, Yellow	5-15P
PS5965GRY	20	125	Plug, Gray	5-20P
PS59650	15	125	Plug, Orange	5-15P
PS5965BK	15	125	Plug, Black	5-15P
PS5969Y	15	125	Connector, Yellow	5-15R
PS5969GRY	15	125	Connector, Gray	5-15R
PS59690	15	125	Connector, Orange	5-15R
PS5969BK	15	125	Connector, Black	5-15P
PS5364Y [‡]	20	125	Plug, Yellow	5-20P
PS5364GRY [‡]	20	125	Plug, Gray	5-20P
PS5369Y [‡]	20	125	Connector, Yellow	5-20R
PS5369GRY [‡]	20	125	Connector, Gray	5-20R
PS5666Y [‡]	15	250	Plug, Yellow	6-15P
PS5669Y [‡]	15	250	Connector, Yellow	6-15R
PS5464Y [‡]	20	250	Plug, Yellow	6-20P
PS5469Y [‡]	20	250	Connector, Yellow	6-20R

Rubber Dust-Tight (Cord Diameter .335" - .640")				
1447	15	125	Plug, Rubber Yellow	5-15P
1547	15	125	Connector, Rubber Yellow	5-15R
1433P	20	125	Plug, Rubber Yellow	5-20P
1533	20	125	Connector, Rubber Yellow	5-20R
1449	15	250	Plug, Rubber Yellow	6-15P
1549	15	250	Connector, Rubber Yellow	6-15R
1448	20	250	Plug, Rubber Yellow	6-20P
1548	20	250	Connector, Rubber Yellow	6-20R


Watertight (Cord Diameter .062" - .625")				
14W47	15	125	Plug, Rubber Yellow	5-15P
15W57	15	125	Connector, Rubber Yellow	5-15R
14W33	20	125	Plug, Rubber Yellow	5-20P
15W33	20	125	Connector, Rubber Yellow	5-20R
14W49	15	250	Plug, Rubber Yellow	6-15P
15W49	15	250	Connector, Rubber Yellow	6-15R
14W48	20	250	Plug, Rubber Yellow	6-20P
15W58	20	250	Connector, Rubber Yellow	6-20R

Turnlok[®] Watertight Plugs & Connectors				
PS26W47	20	125	Turnlok Plug, Rubber Yellow	L5-20P
PS27W47	20	125	Turnlok Connector, Rubber Yellow	L5-20R
PS28W47	30	125	Turnlok Plug, Rubber Yellow	L5-30P
PS29W47	30	125	Turnlok Connector, Rubber Yellow	L5-30R

IP20
Suitability

IP67
Suitability

IP67
Suitability



All devices listed on this page conform to NEMA WD-1 and WD-6

¹ cUL_{us} Compliant

[‡] FSUL WC596 Compliant