

Straight Blade Devices Specification Grade Single Receptacles

15 & 20A, 125 & 250V


Pass & Seymour




Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance	
				UL498	C22.2 No. 42
Single Receptacles Side Wire					
5251-I	15 125	Ivory	5-15R	•	•
5251-W	15 125	White	5-15R	•	•
5251	15 125	Brown	5-15R	•	•
5251-LA	15 125	Light Almond	5-15R	•	•
5351-I	20 125	Ivory	5-20R	•	•
5351-W	20 125	White	5-20R	•	•
5351	20 125	Brown	5-20R	•	•
5351-LA	20 125	Light Almond	5-20R	•	•
5651-I	15 250	Ivory	6-15R	•	•
5651-W	15 250	White	6-15R	•	•
5651	15 250	Brown	6-15R	•	•
5651-LA	15 250	Light Almond	6-15R	•	•
5851-I	20 250	Ivory	6-20R	•	•
5851-W	20 250	White	6-20R	•	•
5851	20 250	Brown	6-20R	•	•
5851-LA	20 250	Light Almond	6-20R	•	•
Single Receptacles Side Wire Right Angle Slots					
5371-I	20 125	Ivory	Non-NEMA	•	•
5371-W	20 125	White	Non-NEMA	•	•
5371	20 125	Brown	Non-NEMA	•	•

Short Strap Single Receptacles Screw Spacing 1.750"					
5258-I	15 125	Ivory	5-15R	•	•
5258-W	15 125	White	5-15R	•	•
5258	15 125	Brown	5-15R	•	•
5358-I	20 125	Ivory	5-20R	•	•
5358-W	20 125	White	5-20R	•	•
5358	20 125	Brown	5-20R	•	•
5358-BK	20 125	Black	5-20R	•	•
5658-I	15 250	Ivory	6-15R	•	•
5658	15 250	Brown	6-15R	•	•
5858-I	20 250	Ivory	6-20R	•	•
5858-W	20 250	White	6-20R	•	•
5858	20 250	Brown	6-20R	•	•


Supplied with mounting screws.

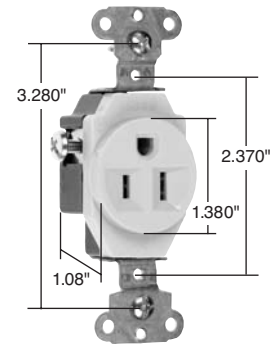

5251-I

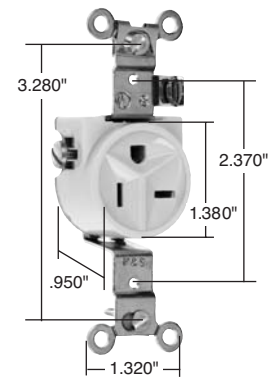

5371-I

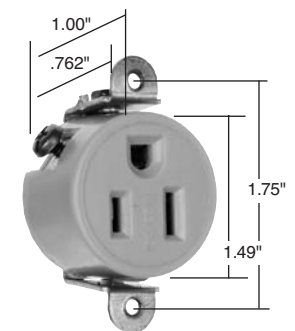

5258-I

2 Pole, 3 Wire



NEMA
5-15R



NEMA
5-20R



NEMA
6-15R



NEMA
6-20R