Catalog Number	4-OWVS		
Project Name		Type	

T8 /T5 4' VAPOR TIGHT, IP65 WET LOCATION LUMINAIRE

OWVS Series (1 OR 2 LAMP)

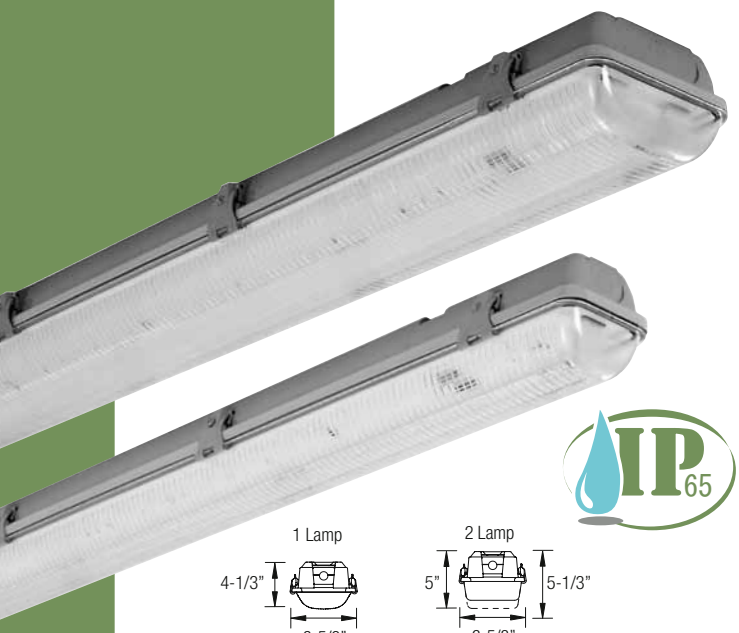

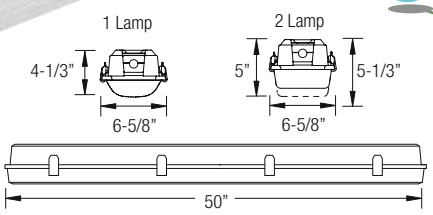

SAME DAY SHIPPING AVAILABLE · FOR WET LOCATION · cULus LISTED · T5 ELECTRONIC TECHNOLOGY · T8 ELECTRONIC TECHNOLOGY · PROUDLY ASSEMBLED in AMERICA

APPLICATION:
The OWVS series is a wet location luminaire that is suitable for exposure to areas where water might be a hazard. Common applications include parking garages, schools, industrial facilities, and stairways.

PRODUCT FEATURES:
- One piece fiber-glass housing with polycarbonate lens.
- Easy install polycarbonate clips secure lens to housing and insure vapor tight operation.
- Continuous one piece gasket assures airtight-seal keeping out condensation, humidity and dust, suitable for wet environments.
- Shallow design is ideal for commercial and industrial spaces requiring general illumination.
- Suitable for suspension by Chain or cable. Can also be surface mounted, all required hardware (less Chain, cable) is included.
- Light weight design enables easier installation.
- T8, T5 lampholders
- Gear tray replaces full metal enclosure
- CEE qualified ballast found standard on most fixture options (Consult factory for details).

LISTING
- UL/ C-UL listed to US and Canadian standards.
- IP65 Rating.

WARRANTY - Guaranteed for one year against mechanical defects.

Ordering Information EXAMPLE: 4-OWVS-2-32-T8

4	OWVS		LUT-EC5						
FIXTURE SIZE	SERIES	#LAMPS/LAMP TYPE	VOLTAGE[1]	# OF BALLAST		BALLAST FACTOR		LAMPS INSTALLED	

FIXTURE SIZE
4 - 4'

SERIES
OWVS-Oracle Wet Location Vapor Tight

#LAMPS/LAMP TYPE
1-32-T8 (1 lamp/32W/T8)
2-32-T8 (2 lamps/32W/T8)
1-28-T5 (1 lamp/28W/T5)
2-28-T5 (2 lamps/28W/T5)
1-54-T5HO (1 lamp/54W/T5HO)
2-54-T5HO (2 lamps/54W/T5HO)

VOLTAGE[1]
(**Blank**) - MVOLT (120/277)
120
277
347
480

 # OF BALLAST
(**Blank**) -1 Ballast
2 -2 Ballasts

BALLAST FACTOR
(**Blank**)- Normal BF
HBF- High BF
LBF- Low BF

LAMPS INSTALLED
(**Blank**) - No lamps
L30K - 3000K
L35K - 3500K
L41K - 4100K
L50K - 5000K

BALLAST CONFIGURATION & CODE

32W/T8	28W/T5	54W/T5HO	DESCRIPTION
(Blank)	-	-	Electronic Instant Start
EPS	(Blank)	(Blank)	Electronic Program Start
ADV-7	-	ADV-7	Advance Mark-7[1]
ADV-10	-	ADV-10	Advance Mark-10[1]
-	ADV-OPT	-	Advance Optanium[1]
ADV-ESS	-	-	Advance Essential[1]
ADV-ROVR	-	ADV-ROVR	Advance Rover[1]
LUT-EHD	LUT-EHD	LUT-EHD	Lutron Ecosystem H-Series[1]
LUT-2W	-	-	Lutron Tu-Wire[1]
LUT-EC5	LUT-EC5	-	Lutron Ecosystem[1]
LUT-EC3	LUT-EC3	LUT-EC3	Lutron Eco-10[1]
LUT-TVE	-	-	Lutron Tve[1]
LUT-H3D	LUT-H3D	LUT-H3D	Lutron Hi-Lume 3D[1]
-	-	LUT-ECD	Lutron Ecosystem (347V Only)[1]

1- Voltage must be specified for dimming ballast.

EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)

ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for **T8 or BX**
EMG-T8-BX-600	Up to 600 L. for **T8 or BX**
EMG-T8-BX-700	Up to 700 L. for **T8 or BX**
EMG-T8-BX-1400	Up to 1400 L. for **T8 or BX**
EMG-T5-T5HO-700	Up to 700 L. for **T5 or T5HO**
EMG-T5-T5HO-1300	Up to 1300 L. for **T5 or T5HO**
EMG-T8-BX-T5-T5HO-3200	Up to 3200 L. for **T8, BX, T5 or T5HO**
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for **T8, BX, T5 or T5HO**
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for **T8, BX, T5 or T5HO**

WIRING OPTIONS

PCSB120	- 10' Nema 5-15R 120V Straight Blade Plug
PCSB277	- 10' Nema 7-15R 277V Straight Blade Plug
PCTL120	- 10' Nema L5-15R 120V Twist Lock Plug
PCTL277	- 10' Nema L7-15R 277V Twist Lock Plug
IPTL120	- 10' 120V IP Rated Twist lock Plug
IPTL277	- 10' 277V IP Rated Twist lock Plug
S01	- 10' 120V/277V SO Cord
S02	- 10' 480V SO Cord

(Consult Factory for 208V, 248V, 347V and 480V wiring)

OTHER OPTIONS

CH	- Heavy Duty Chain
MS	- Motion Sensor
MSPH	- Motion Sensor with Photocell
GSS	- Gripple Suspension System
WLMS	- Wet Location Motion Sensor
USA	- Made in America Compliance