2-IN-1 LED PUCK

ACCENT LED LIGHTING

These robust LED pucks, featuring a frosted lens, deliver highly efficient punches of white light. Well suited for under-cabinet lighting and a variety of other applications.

KEY FEATURES

- Surface adapter included
- Heat sink and thermal protection
- Ideal for highlighting display cabinets

c UL us IN INDOOR

MODEL

4005FR 2.1W Single puck

K4005FR 3 x 2.1W Puck kit includes plug-in driver

SPECIFICATIONS

- 12V DC–LED driver required.
- Over 50,000 hours of service life.
- 12" (30 cm) input lead with quick connector.
- 24" (61 cm) interconnection harness included.
- Warm white light.
- Excellent color rendering.
- Superior LED performance and lifespan.
- Smooth 360° wide spread.
- Minimal heat emission.
- Surface adapter included.
- Brighter than most equivalent 20W halogen pucks.
- Steel/aluminum construction.
- Frosted glass lens.
- Fully dimmable with the DALS 6-zone translator.

INSTALLATION

- For recess or surface installation, in any direction.
- Ideal for accent lighting inside or under any cabinet, shelf or display.
- A variety of power supplies and installation accessories available.

LED ARRAY

2.1W, 3000°K, 90 Lumens

FINISH

BK	Black
WH	White
SN	Satin nickel

POWER SUPPLIES–PLUG IN

ETR-LED10WPI	12VDC/10W class 2 LED driver
ETR-LED24WPI	12VDC/24W class 2 LED driver
ETR-LED96WPI	12VDC/96W class 2 LED driver

POWER SUPPLIES–HARD-WIRED

BT7LED	12VDC/8.4W class 2 LED driver
BT12LED	12VDC/12W class 2 LED driver
BT24LED	12VDC/24W class 2 LED driver
BT100LED-12V	12VDC/100W non-class 2 LED driver

ACCESSORIES

4000E-24	24" (61 cm) Extension cord
4000E-60	60" (152.4 cm) Extension cord
4000HRNS-24	24" (61 cm) Interconnection harness
LED6ZONE-72W	72W 6-zone translator
LED6ZONE-RMT	Remote for 6-zone translator

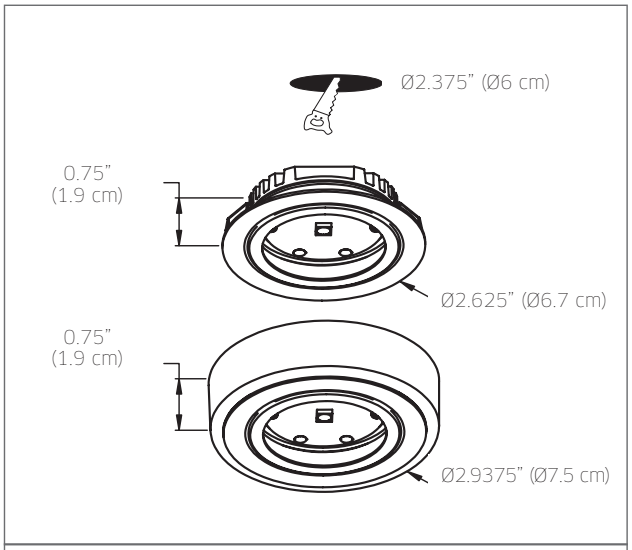

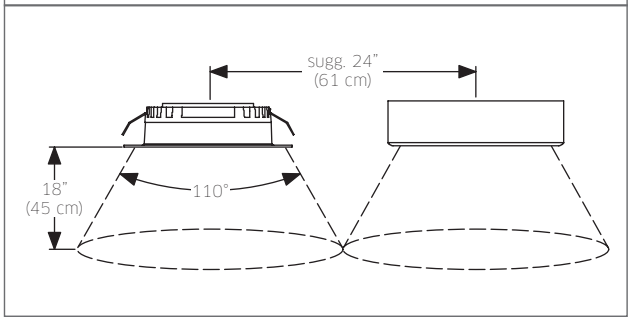

ORDERING EXAMPLE

4005FR-WH

Would order a 4005 single puck with a 2.1W LED array with 90 Lumens at 3000°K in a white finish.