

## Uni-Lock Connectors 3/4 Turn Lock



750 Volts

### STANDARD FEATURES

- Attachable to customer's cable
- Available with/without pilot pins
- Full line of plugs and receptacles
- All parts thoroughly insulated and/or grounded
- Lockable against accidental disconnect
- Water-tight
- Meet mine Health and Safety Standards

### PARAMETERS

- Three or four pins with/without pilot contacts
- Number 8 through 500 MCM
- Up to 1000 volts/625 amps

### APPLICATIONS

#### MINING

- Shuttle Cars
- Cutting Machines
- Drills
- Distribution boxes

#### INDUSTRY

- Large motors-test stands for checking motors
- Locable hookup for large portable equipment
- Steel Mills-provide power for locomotion equipment

#### MILITARY

- Provide ship-to-shore power

#### RAILROAD

- Carry power from car-to-car



Male  
Panel Mount



Female  
Panel Mount




Male  
Cable Attachable



Female  
Cable Attachable



# Uni-Lock Connectors

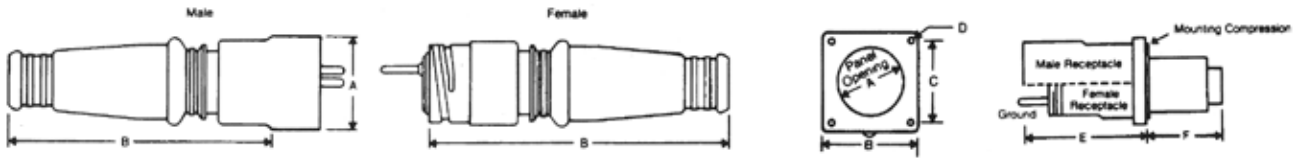

Max. Cable AWG	Connector Rating (750V) AMP	Cable Attachment		Dimensions		Panel Mount		Dimensions					
		Male	Female	A	B	Male	Female	A	B	C	D	E	F

### 2 Power and 1 Ground with pilot contacts

8	75	8329-2	8329-1	3 5/8	11 11/16	8329-15	8329-10	2 3/8	3 3/8	2 3/4	9/32	5	4
4	125	8330-3	8330-4	3 5/8	11 13/16	8330-16	8330-12	2 3/8	3 3/8	2 3/4	9/32	5	4
2	160	8331-1	8331-4	3 5/8	13 1/16	8331-15	8331-11	2 5/8	3 5/8	2 7/8	9/32	5	4 1/2
2/0	225	8332-1	8332-8	4 1/16	14 1/16	8332-16	8332-13	2 15/16	4	3 5/16	9/32	5 1/8	4 15/16
4/0	325	8333-4	8333-3	4 5/8	13 15/16	8331-15	8331-1	3 3/8	4 1/2	3 9/16	11/32	5 5/16	5 1/16
400MCM	500	8334-2	8334-1	6	19 7/16	8334-15	8334-10	4 1/2	6	4 13/16	13/32	6 1/4	6
500MCM	625	8335-1	8335-2	6 3/4	22 1/8	8335-8	8335-4	5	7 1/4	5 7/8	17/32	8 5/8	6 1/2

### 3 Power and 1 Ground with no pilot contacts

8	75	8336-3	8336-2	3 5/8	11 13/16	8336-13	8336-8	2 3/8	3 3/8	2 3/4	9/32	5	4
4	125	8337-3	8337-4	3 5/8	11 13/16	8337-14	8337-11	2 3/8	3 3/8	2 3/4	9/32	5	4
2	160	8338-2	8338-3	3 7/8	13 1/16	8338-13	8338-8	2 5/8	3 5/8	2 7/8	9/32	5	4 1/2
2/0	225	8339-1	8339-2	4 1/16	14 1/16	8339-13	8339-3	2 15/16	4	3 5/16	9/32	5 1/8	4 15/16
4/0	325	8340-5	8340-4	4 5/8	13 13/16	8340-2	8340-10	3 3/8	4 1/2	3 9/16	11/32	5 5/15	5 1/16
300MCM	425	8341-2	8341-1	6	19 7/16	8341-13	8341-9	4 1/2	6	4 13/16	13/32	6 1/4	6

### 3 Power and 1 Ground with 2 pilot contacts

8	75	8343-5	8343-4	3 5/8	11 13/16	8343-16	8343-12	2 3/8	3 3/8	2 3/4	9/32	5	4
4	125	8344-5	8344-4	3 7/8	13	8344-2	8344-1	2 3/8	3 5/8	2 7/8	9/32	5	4 1/2
2	160	8345-5	8345-6	4 3/16	14 1/16	8345-15	8345-10	2 15/16	4	3 5/16	9/32	5 1/8	4 15/16
2/0	225	8346-2	8346-1	4 5/8	13 13/16	8346-13	8346-8	3 3/8	4 1/2	3 9/16	11/32	5 5/16	5 1/16
4/0	325	8347-2	8347-1	6	19 9/16	8347-13	8347-8	4 1/2	6	4 13/16	13/32	6 1/4	6
400MCM	500	8348-3	8348-2	6 3/4	22 3/8	8348-10	8348-7	5	7 1/4	5 7/8	17/32	8 5/8	6 1/2

These are connector ratings only.

Operating ratings must be based on cable capacity.