

ANCHORS & GUYING

Eight Way Expanding Anchor (steel)


Cat. No	Size Anchor and Hole Inches	Max. Size Rod Inches	Area Expanded Sq. Inches	Holding Strength Classification	Shipping Wt. lbs (100 pcs)	Std. Pkg
K150-8	8	3/4	135	12000 lbs	1000	5
K150-10	10	1	200	20000 lbs	1900	3



- ◆ Easy to install
- ◆ Contoured blades cut readily into undisturbed earth
- ◆ Deeply ribbed and embossed for greater strength
- ◆ Recommended for all soil types

Anchor Plates Square

Cat. No.	Area Sq. Inches	Dimensions Inches	Rod Dia. Inches	Shipping Wt. lbs (100 pcs)	Std. Pkg
K152-12	150	12-1/2 X 12-1/2	1/2 or 5/8	1050	1
K152-14	200	14-1/2 X 14-1/2	5/8 or 3/4	1200	1
K152-16	250	16-1/4 X 16-1/4	5/8 or 3/4	1300	1
K152-18	300	18 X 18	5/8, 3/4 or 1	1600	1
K152-21	400	21 X 21	3/4, 1 or 1-1/4	2400	1
K152-24	400	24 X 24	3/4, 1 or 1-1/4	2700	1

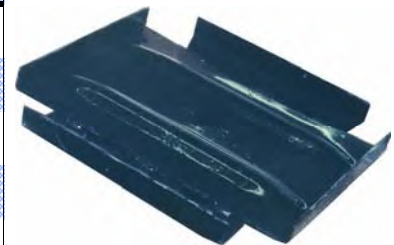

K152-12

- ◆ Heavy gauge steel
- ◆ Four reinforcing ribs and four flanges
- ◆ Plates welded together at right angles. Ribs positioned concave and convex to plates ensuring maximum holding power and resistance to deformation of the unit
- ◆ Nut retainer welded to underside of plate providing positive guide for anchor rod (at 90° to pulling force of rod at all times)

ANCHORS & GUYING

Screw Anchor



Cat. No.	Blade Dia. Inches	Rod Dia. Inches	Rod Length Feet	Approx Strength Dry Clay	Shipping Wt. lbs (100 pcs)	Std. Pkg
K151-6	6	3/4	5-1/2	5000 lbs	1050	5
K151-8	8	1	5-1/2	8000 lbs	1500	2

- ◆ C.S.A. standard
- ◆ Large forged rod eye to take 1" bar for hand installation
- ◆ Chisel point is provided to aid installation
- ◆ Blade pitched to bite correctly into soil without undue earth disturbance
- ◆ Hot dip galvanized

Power Installed Screw Anchors

Cat No.	Helix Inches	Tapped Inches	Shipping Wt. lbs (100 pcs)	Std. Pkg
K156-2	8	1	1000	5
K156-5	10	1	1300	4
K156-13	12	1	1330	3

1 3/8" Hub

- ◆ Rated at 6,000 ft lb torque
- ◆ Tapped hub for 5/8"-11 threads available

Cat No.	Helix Inches	Tapped Inches	Shipping Wt. lbs (100 pcs)	Std. Pkg
K156-8	8	1	1100	5
K156-10	10	1	1400	4
K156-12	12	1	1600	2

1 1/2" Hub

- ◆ Rated at 8,000 ft lb torque
- ◆ Tapped hub for 5/8"-11 threads available



Heavy Duty Power Installed Screw Anchors


Cat No.	Helix Inches	Tapped Inches	Shipping Wt. lbs (100 pcs)	Std. Pkg
K156-108	8	1	1100	5
K156-110	10	1	1300	4
K156-112	12	1	1500	2
K156-114	14	1	2000	2



- ◆ Rated at 10,000 ft lb torque
- ◆ Universal hub - 1 1/2" or 1 3/8" drive shaft

ANCHORS & GUYING

Thimble Eyenuts



K156-34

- ◆ C.S.A standard
- ◆ Drop forged steel
- ◆ Hot dip galvanized



K156-35



K156-36

Cat. No.	Size Inches	Eye	Rod Dia. Inches	Shipping Wt. lbs	Std. Pkg
K156-31	5/8	Single	5/8	100	25
K156-32	5/8	Double	5/8	150	25
K156-33	5/8	Triple	5/8	200	25
K156-34	1	Single	3/4 and 1	100	25
K156-35	1	Double	3/4 and 1	150	25
K156-36	1	Triple	3/4 and 1	200	25

Anchor Rod - Auxiliary Eye


- ◆ Where Anchor capacity is available offers most economical method of adding one or even two additional guys to any type of existing anchor rod
- ◆ Generous thimble eye
- ◆ Easy installation
- ◆ Casting - ductile iron
- ◆ Hot dip galvanized



Cat. No.	Type of Nut	Anchor Rod Dia. Inches	Max Strand Size Inches	Thimble Dia. Inches	Shipping Wt. lbs (100 pcs)	Std. Pkg
K157-1	SQ.	5/8, 3/4	1/2	1-1/2	280	25
K157-3	SQ.	7/8, 1	1/2	1-1/2	360	25

ANCHORS & GUYING

Extension Rods

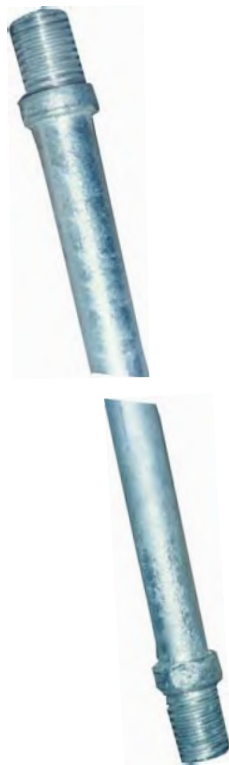

Cat. No.	Rod Dia. Inches	Length Feet	Thread Dia. Inches	Shipping Wt. lbs. (100 pcs)	Std. Pkg
K156-21	5/8	7	5/8	750	10
K156-22	3/4	7	1	900	10
K156-23	1	7	1	1300	5
K156-41	5/8	3-1/2	5/8	400	10
K156-42	3/4	3-1/2	1	585	10
K156-43	1	3-1/2	1	985	5

- ◆ Drop forged both ends
- ◆ Hot dip galvanized

Anchor Rod Coupling

Cat No.	Size Inches	Threads	Shipping Wt. lbs (100 pcs)	Std. Pkg
K156-353	5/8	11	50	50
K156-354	1	8	66	50

- ◆ Hot dip galvanized



ANCHORS & GUYING

Anchor Rods



K153

Single Thimble Eye

- ◆ Drop forged steel - galvanized
- ◆ Supplied with one square nut
- ◆ Minimum Thread length - 2"

Cat No.	Rod Dia. Inches	Length Feet	Shipping Wt. lbs (100 pcs)	Std. Pkg
K153-5806	5/8	6	720	5
K153-5807	5/8	7	800	5
K153-5808	5/8	8	900	5
K153-3406	3/4	6	984	5

Cat.No.	Rod Dia. Inches	Length Feet	Shipping Wt. lbs (100 pcs)	Std. Pkg
K153-3407	3/4	7	1130	5
K153-3408	3/4	8	1290	5
K153-3409	3/4	9	1430	5
K153-3410	3/4	10	1560	5



K154

Double Thimble Eye

- ◆ Drop forged steel - galvanized
- ◆ Supplied with one square nut
- ◆ Minimum Thread length - 2"

Cat No.	Rod Dia. Inches	Length Feet	Shipping Wt. lbs (100 pcs)	Std. Pkg
K154-5806	5/8	6	750	5
K154-5807	5/8	7	830	5
K154-5808	5/8	8	930	5
K154-3406	3/4	6	1010	5
K154-3407	3/4	7	1160	5

Cat No.	Rod Dia. Inches	Length Feet	Shipping Wt. lbs (100 pcs)	Std. Pkg
K154-3408	3/4	8	1320	5
K154-3409	3/4	9	1610	5
K154-3410	3/4	10	1800	3
K154-1008	1	8	2350	2
K154-1009	1	9	2900	2
K154-1010	1	10	3400	2



K155

Triple Thimble Eye

- ◆ Drop forged steel - galvanized
- ◆ Supplied with one square nut
- ◆ Minimum Thread length - 2"

Cat No.	Rod Dia. Inches	Length Feet	Shipping Wt. lbs. (100 pcs)	Std. Pkg.
K155-3407	3/4	7	1610	1
K155-1007	1	7	1970	1
K155-1008	1	8	2250	1

Cat No.	Rod Dia. Inches	Length Feet	Shipping Wt. lbs. (100 pcs)	Std. Pkg.
K155-1009	1	9	2530	1
K155-1010	1	10	2810	1
K155-1012	1	12	3400	1