

**THREAD CUTTING FLOORBOARD SCREWS  
VIS AUTOTARAUEUSES POUR PLANCHER**

**225  
Series**



- Flat Head Type 'F'

Used to fasten wood plank, laminated plywood or corrugated aluminium flooring to the supporting steel cross members of trucks and trailers.

**ORDER BY STOCK NUMBER**

Standard Package: 100 Pieces

Stock No.	Size	Driver	Stock No.	Size	Driver
225-792	1/4-20 x 1-1/2	No. 3 Phillips	225-752	1/4-20 x 1-1/2	No. 3 Square
225-793	1/4-20 x 2	No. 3 Phillips	225-753	1/4-20 x 2	No. 3 Square
225-794	1/4-20 x 2-1/2	No. 3 Phillips	225-754	1/4-20 x 2-1/2	No. 3 Square
225-795	1/4-20 x 3	No. 3 Phillips	225-755	1/4-20 x 3	No. 3 Square

**6-LOBE FLOORBOARD SCREWS  
VIS À SIX PANS POUR PLANCHER**

- 6-Lobe Flat Head Tri-Lobular, Phosphate and Oil Finish.



**ORDER BY STOCK NUMBER**

Standard Package: 50 Pieces

Stock No.	Size	Driver	Stock No.	Size	Driver
225-890	1/4-20 x 1	T-30	225-895	1/4-20 x 3	T-30
225-891	1/4-20 x 1-1/4	T-30	225-896	5/16-18 x 1-3/4	T-40
225-892	1/4-20 x 1-1/2	T-30	225-897	5/16-18 x 2	T-40
225-893	1/4-20 x 2	T-30	225-898	5/16-18 x 2-1/2	T-40
225-894	1/4-20 x 2-1/2	T-30			


**DRILL-X<sup>®</sup> SELF-DRILLING TAPPING SCREWS  
VIS TARAUD FORET DRILL-X<sup>®</sup>**

**232  
Series**


- Papco<sup>®</sup> Self-Drilling and Tapping Screws are made of high-quality steel and are specially heat treated.
- The drill point has been incorporated into the screw in the familiar twist drill design.
- These screws drill their own hole - form mating threads - fasten securely and can be used in steel, plastics, composite materials, wood plus various laminates.
- Determine total thickness of the material to be drilled then choose No. 2 or No. 3 point to allow complete drilling.
- Available in Pan Phillips, Pan Socket and Hex Head.

**ORDER BY STOCK NUMBER**

Standard Package: 100 Screws



Drill Point length determines maximum Metal thickness drillable.  
No. 2 Point up to .110 Thick      No. 3 Point up to .250 Thick

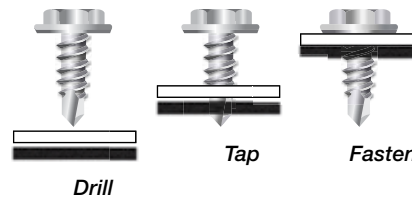

Stock No.	Dia. x (L)	Drill Point	Max-Metal Drillable (B)	Driver	Stock No.	Dia. x (L)	Drill Point	Max-Metal Drillable (B)	Driver
<b>Pan Phillips Head</b>									
232-010	6 x 3/8	No. 2	.090	No. 2	232-016	8 x 1	No. 2	.100	No. 2
232-011	6 x 1/2	No. 2	.090	No. 2	232-020	10 x 1/2	No. 2	.110	No. 2
232-013	8 x 1/2	No. 2	.100	No. 2	232-021	10 x 5/8	No. 3	.175	No. 2
232-014	8 x 5/8	No. 2	.100	No. 2	232-022	10 x 3/4	No. 3	.175	No. 2
232-015	8 x 3/4	No. 2	.100	No. 2	232-024	10 x 1	No. 3	.175	No. 2
<b>Pan Socket Head</b>									
232-030	6 x 3/8	No. 2	.090	No. 2	232-041	8 x 2	No. 2	.100	No. 2
232-031	6 x 1/2	No. 2	.090	No. 2	232-037	10 x 1/2	No. 2	.110	No. 2
232-032	8 x 1/2	No. 2	.100	No. 2	232-038	10 x 5/8	No. 3	.175	No. 2
232-033	8 x 5/8	No. 2	.100	No. 2	232-039	10 x 3/4	No. 3	.175	No. 2
232-034	8 x 3/4	No. 2	.100	No. 2	232-044	10 x 1	No. 2	.175	No. 3
232-035	8 x 1	No. 2	.100	No. 2	232-045	10 x 1-1/4	No. 2	.175	No. 3
232-036	8 x 1-1/2	No. 2	.100	No. 2	232-046	10 x 1-1/2	No. 2	.175	No. 3
232-040	8 x 1-1/4	No. 2	.100	No. 2	232-048	10 x 2	No. 2	.175	No. 3