

Features

- 1.5 pole (1 pole with shunt) 30 & 40 amp to 2 pole 20, 25, 30 & 40 amp.
- Features lug, spade terminals and protective covers
- Compact size
- Universal galvanized mounting plates
- ARI 780/790 standards
- Brass/copper terminals
- Quick connect and screw terminals on coil.
- Snap on auxiliary contacts available
- cURus approved




1 Pole with Shunt and 2 Pole Models

Part #	Poles	Full Load Amps.	Coil Voltage 50/60	Locked Rotor Amps			Resistive Amps.	Termination	Furnas #
				240V	480V	600V			
DP-1P30A24	1.5	30	24	180	150	120	40	Screw Type	45EG10AJA
DP-1P30A120	1.5	30	120	180	150	120	40		45EG10AFA
DP-1P30A240	1.5	30	208/240	180	150	120	40		45EG10AGA
DP-1P40A24	1.5	40	24	240	200	160	50	Box Lug	45GG10AJAL, 45FG10AJA, 45GG10AJA
DP-1P40A120	1.5	40	120	240	200	160	50		45GG10AFAL, 45FG10AFA, 45GG10AFA
DP-1P40A240	1.5	40	208/240	240	200	160	50		45GG10AGAL, 45FG10AGA, 45GG10AGA
DP-2P20A24	2	20	24	120	100	80	30	Box Lug	45CG20AJ
DP-2P20A120	2	20	120	120	100	80	30		45CG20AF
DP-2P20A240	2	20	208/240	120	100	80	30		45CG20AG
DP-2P25A24	2	25	24	150	125	100	35	Box Lug	45DG20AJ
DP-2P25A120	2	25	120	150	125	100	35		45DG20AF
DP-2P25A240	2	25	208/240	150	125	100	35		45DG20AG
DP-2P30A24	2	30	24	180	150	120	40	Screw Type	45EG20AJ
DP-2P30A120	2	30	120	180	150	120	40		45EG20AF
DP-2P30A240	2	30	208/240	180	150	120	40		45EG20AG
DP-2P40A24	2	40	24	240	200	160	50	Box Lug	45GG20AJL
DP-2P40A120	2	40	120	240	200	160	50		45GG20AFL
DP-2P40A240	2	40	208/240	240	200	160	50		45GG20AGL

Features

- 3 pole 20, 25, 30, 40, 50 & 60 amp
- Totally enclosed
- Features lug, spade terminals and protective covers
- Compact size
- Universal galvanized mounting plates
- ARI 780/790 standards
- Push to test button
- Brass/copper terminals
- Quick connect and screw terminals on coil.
- Snap on auxiliary contacts available
- cURus approved

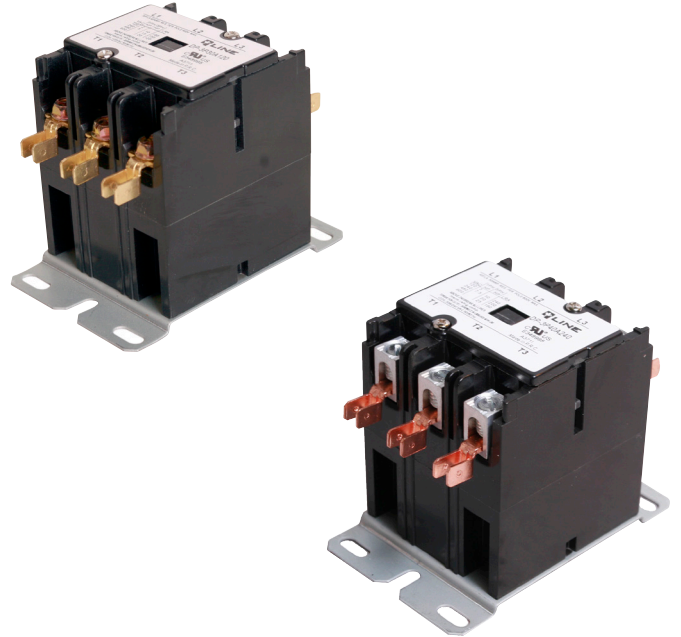

3 Pole Models

Part #	Poles	Full Load Amps.	Coil Voltage 50/60	Locked Rotor Amps			Resistive Amps.	Termination	Furnas #
				240V	480V	600V			
DP-3P20A24	3	20	24	120	100	80	30	Box Lug	-
DP-3P20A120	3	20	120	120	100	80	30		-
DP-3P20A240	3	20	208/240	120	100	80	30		-
DP-3P25A24	3	25	24	150	125	100	35	Box Lug	-
DP-3P25A120	3	25	120	150	125	100	35		-
DP-3P25A240	3	25	208/240	150	125	100	35		-
DP-3P30A24	3	30	24	180	150	120	40	Screw Type	42BF35AJ
DP-3P30A120	3	30	120	180	150	120	40		42BF35AF
DP-3P30A240	3	30	208/240	180	150	120	40		42BF35AG
DP-3P40A24	3	40	24	240	200	160	50	Box Lug	42CF35AJ
DP-3P40A120	3	40	120	240	200	160	50		42CF35AF
DP-3P40A240	3	40	208/240	240	200	160	50		42CF35AG
DP-3P50A24	3	50	24	300	250	200	65	Box Lug	42DF35AJ
DP-3P50A120	3	50	120	300	250	200	65		42DF35AF
DP-3P50A240	3	50	208/240	300	250	200	65		42DF35AG
DP-3P60A24	3	60	24	360	300	240	75	Box Lug	42EF35AJ
DP-3P60A120	3	60	120	360	300	240	75		42EF35AF
DP-3P60A240	3	60	208/240	360	300	240	75		42EF35AG
DP-3P75A24	3	75	24	450	375	300	90	Box Lug	42FE35AJ106
DP-3P75A120	3	75	120	450	375	300	90		42FE35AF106
DP-3P75A240	3	75	208/240	450	375	300	90		42FE35AG106
DP-3P90A24	3	90	24	540	450	360	120	Box Lug	42GE35AJ106
DP-3P90A120	3	90	120	540	450	360	120		42GE35AF106
DP-3P90A240	3	90	208/240	540	450	360	120		42GE35AG106

Features

- 4 pole 20, 25, 30 & 40 amp
- Features lug, spade terminals and protective covers
- Totally enclosed
- Compact size
- Universal galvanized mounting plates
- ARI 780/790 standards
- Push to test button
- Brass/copper terminals
- Quick connect and screw terminals on coil.
- Snap on auxiliary contacts available
- cURus approved



4 Pole Models

Part #	Poles	Full Load Amps.	Coil Voltage 50/60	Locked Rotor Amps			Resistive Amps.	Termination	Furnas #
				240V	480V	600V			
DP-4P20A24	4	20	24	120	100	80	30	Box Lug	-
DP-4P20A120	4	20	120	120	100	80	30		-
DP-4P20A240	4	20	208/240	120	100	80	30		-
DP-4P25A24	4	25	24	150	125	100	35	Box Lug	-
DP-4P25A120	4	25	120	150	125	100	35		-
DP-4P25A240	4	25	208/240	150	125	100	35		-
DP-4P30A24	4	30	24	180	150	120	40	Screw Type	42BF25AJ
DP-4P30A120	4	30	120	180	150	120	40		42BF25AF
DP-4P30A240	4	30	208/240	180	150	120	40		42BF25AG
DP-4P40A24	4	40	24	240	200	160	50	Box Lug	42CF25AJ
DP-4P40A120	4	40	120	240	200	160	50		42CF25AF
DP-4P40A240	4	40	208/240	240	200	160	50		42CF25AG

Features

- Auxillary switches for 3 & 4 pole 30 - 90 amp "DP" series contactors
- Compact size
- cURus approved



Auxiliary Switches

Switch Size	Part #	Cont. Amps	Voltage Rating	Description	Connection
3 Pole, 20-60 Amp 4 Pole 30-60 Amp	DP-AS3	10	600	2 x SPST, N.O. & N.C.	Quick
	DP-AS6	10	600	2 x SPST, N.O. & N.C.	Screw
	DP-AS7	10	300	SPDT, N.O. & N.C.	Quick
	DP-AS8	10	300	2 x SPDT, N.O. & N.C.	Quick
	DP-AS1	10	600	SPST, N.O.	Quick
	DP-AS4	10	600	SPST, N.O.	Screw
	DP-AS2	10	600	SPST, N.C.	Quick
	DP-AS5	10	600	SPST, N.C.	Screw
3 Pole, 50-60 Amp	DP-AS10	10	300	SPDT, N.O. & N.C.	Quick
3 Pole, 75-90 Amp	DP-AS9	10	300	SPDT, N.O. & N.C.	Quick