


SAW BLADES

Reciprocating Saw Blades



GREENLEE EXTREME™ Ti-Metal™ Blades

- High performance Titanium (Ti) coating + Improved Bi-Metal blades = GREENLEE EXTREME™ Ti-Metal™
- The super-hard titanium coating helps dissipate heat and resists wear on the cutting teeth
- Extreme™ Ti-Metal™ blades stay sharp, cut faster, and last longer... even in the most demanding applications


GREENLEE EXTREME™ Blades

- Heavy-duty blades for heavy metal applications
- Designed specifically for extreme metal cutting in structural steel I-Beam and angle iron
- Thicker, wider blades cut straighter and resist bending during high-load cuts

GREENLEE Bi-Metal Blades

- Greenlee blades feature improved bi-metal material with added cobalt for increased toughness, durability and blade life
- Precision cutting teeth are designed to stay sharp and cut fast, saving valuable time on the job
- Available in a variety of blade types for cutting wood, nail embedded wood, metal, and other demanding construction materials

| | CAT. NO. | LENGTH X WIDTH X THICKNESS INCH / MM | MATERIAL | QTY/ PK | TEETH PER INCH | SPEED AND QUALITY OF CUT |
|--|----------|---|--|------------|-------------------|---|
| EXTREME™ Ti-METAL™ | | | | | | |
| NOTE: Minimum blade length = Material width + 3" | | | | | | |
| | 353-624G | 6 x 3/4 x .035 / 152 x 19 x .9 | BEST for sheet metal (1/8" and less). | 5 | 24T | SLOWER, SMOOTHER ↑ ↓ FASTER, ROUGHER |
| | 353-818G | 8 x 3/4 x .035 / 203 x 19 x .9 | BEST for thin metal (1/16" - 3/16"). | 5 | 18T | |
| | 353-618G | 6 x 3/4 x .035 / 152 x 19 x .9 | BEST for thin metal (1/16" - 3/16"). | 5 | 18T | |
| | 353-614G | 6 x 3/4 x .035 / 152 x 19 x .9 | BEST for medium metal (3/32" - 3/8"). | 5 | 14T | |
| | 353-610G | 6 x 3/4 x .035 / 152 x 19 x .9 | BEST for general purpose. | 5 | 10T | |
| | 353-810G | 8 x 3/4 x .050 / 203 x 19 x 1.3 | BEST for general purpose. | 5 | 10T | |
| | 353-656G | 6 x 3/4 x .050 / 152 x 19 x 1.3 | BEST for clean wood and wood with nails. (plunge cutting) | 5 | 6T | |
| EXTREME™ | | | | | | |
| NOTE: Minimum blade length = Material width + 3" | | | | | | |
| | 353-6118 | 6 x 1 x .042 / 152 x 25 x 1.1 | BEST for structural steel (up to 1/4"). | 5 | 18T | SLOWER, SMOOTHER ↑ ↓ FASTER, ROUGHER |
| | 353-9118 | 9 x 1 x .042 / 229 x 25 x 1.1 | BEST for structural steel (up to 1/4"). | 5 | 18T | |
| | 353-6114 | 6 x 1 x .042 / 152 x 25 x 1.1 | BEST for structural steel (up to 3/8"). | 5 | 14T | |
| | 353-9114 | 9 x 1 x .042 / 229 x 25 x 1.1 | BEST for structural steel (up to 3/8"). | 5 | 14T | |




Reciprocating Saw Blades

| | CAT. NO. | LENGTH X WIDTH X THICKNESS INCH / MM | MATERIAL | QTY/ PK | TEETH PER INCH | SPEED AND QUALITY OF CUT |
|--|-------------|---|---|------------|-------------------|---|
| BI-METAL | | | | | | |
| NOTE: Minimum blade length = Material width + 3" | | | | | | |
| | 353-624 | 6 x 3/4 x .035 / 152 x 19 x .9 | BETTER for sheet metal (1/8" and less). | 5 | 24T | SLOWER, SMOOTHER ↑ |
| | 353-818 | 8 x 3/4 x .035 / 203 x 19 x .9 | BETTER for thin metal (1/16" - 3/16"). | 5 | 18T | |
| | 353-618 | 6 x 3/4 x .035 / 152 x 19 x .9 | BETTER for thin metal (1/16" - 3/16"). | 5 | 18T | |
| | 353-814 | 8 x 3/4 x .050 / 203 x 19 x 1.3 | BETTER for medium metal (3/32" - 3/8"). | 5 | 14T | |
| | 353-614 | 6 x 3/4 x .035 / 152 x 19 x .9 | BETTER for medium metal (3/32" - 3/8"). | 5 | 14T | |
| | 353-414 | 4 x 3/4 x .035 / 102 x 19 x .9 | BETTER for medium metal (3/32" - 3/8"). | 5 | 14T | |
| | 353-804 | 8 x 3/4 x .050 / 203 x 19 x 1.3 | BETTER for thick metal (1/8" - 1/2"). | 5 | 10/14T | |
| | 353-835 | 8 x 3/4 x .035 / 203 x 19 x .9 | BETTER for general purpose. | 5 | 10/14T | |
| | 353-635 | 6 x 3/4 x .035 / 152 x 19 x .9 | BETTER for general purpose. | 5 | 10/14T | |
| | 353-110 | 12 x 3/4 x .050 / 305 x 19 x 1.3 | BETTER for general purpose. | 5 | 10/14T | |
| | 353-810 | 8 x 3/4 x .050 / 203 x 19 x 1.3 | BETTER for general purpose. | 5 | 10T | |
| | 353-610 | 6 x 3/4 x .035 / 152 x 19 x .9 | BETTER for general purpose. | 5 | 10T | |
| | 353-123 | 6 x 3/4 x .035 / 152 x 19 x .9 | BETTER for general purpose. | 5 | 8/18T | |
| | 353-969 | 9 x 7/8 x .063 / 229 x 22 x 1.6 | BEST for demolition projects. | 5 | 8/10T | |
| | 353-646 | 6 x 3/4 x .050 / 152 x 19 x 1.3 | BETTER for clean wood and wood with nails. | 5 | 6T | |
| | 353-656 | 6 x 3/4 x .050 / 153 x 19 x 1.3 | BETTER for clean wood and wood with nails. (plunge cutting) | 5 | 6T | |
| | 353-956 | 9 x 3/4 x .050 / 229 x 19 x 1.3 | BETTER for clean wood and wood with nails. (plunge cutting) | 5 | 6T | |
| | 353-156 | 12 x 3/4 x .050 / 305 x 19 x 1.3 | BETTER for clean wood and wood with nails. (plunge cutting) | 5 | 6T | |
| | 353-636 | 6 x 3/4 x .050 / 152 x 19 x 1.3 | BETTER for drywall and plaster. | 5 | 6T | FASTER, ROUGHER ↓ |
| SPECIALTY | | | | | | |
| NOTE: Minimum blade length = Material width + 3" | | | | | | |
| | 353-800RDG | 8 x 3/4 x .039 / 203 x 19 x 1 | BEST for cast iron pipe, block & brick and other abrasives such as tile. | 1 | Diamond Grit | SLOWER, SMOOTHER ↑ ↓ FASTER, ROUGHER |
| | 353-618RS | 6 x 3/4 x .039 / 152 x 19 x 1 | BEST for stainless steel (1/16" - 3/16"). Carbide teeth | 1 | 18T | |
| | 353-6563RCT | 6 x 3/4 x .050 / 152 x 19 x 1.3 | BEST for cement board, fiber board, and plaster. Carbide tipped | 1 | 6T | |

HAND SAWS

12" Hack Saw

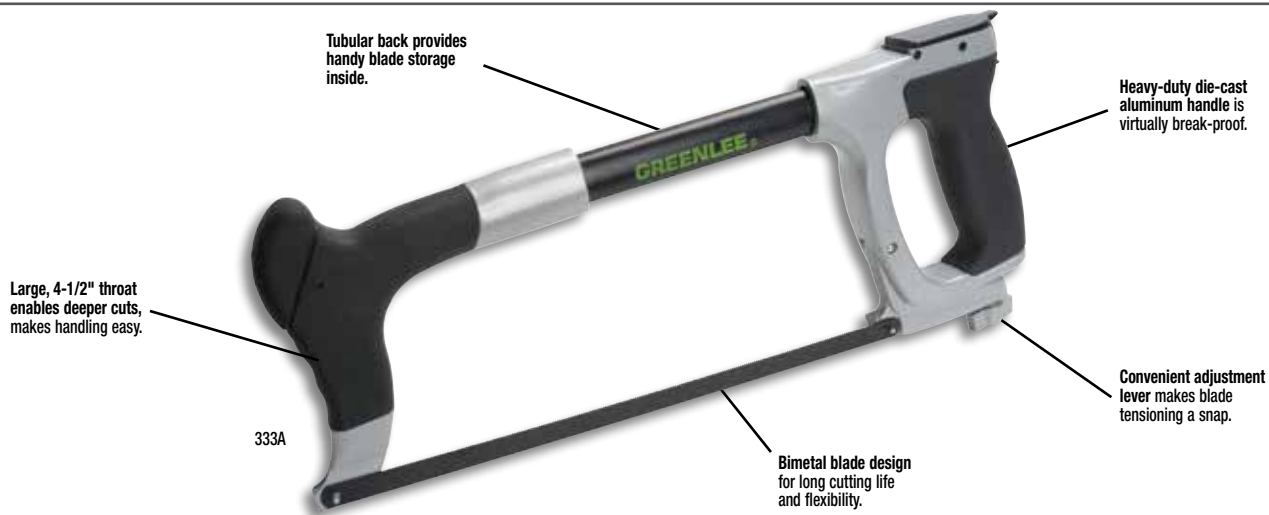

| CAT. NO. | UPC NO. | DESCRIPTION |
|----------|---------|----------------------------------|
| 333A | 23635 | 12" (305 mm) Heavy-Duty Hack Saw |

SPECIFICATIONS

| | |
|-----------------|----------------------|
| Capacity | 12" (304.8 mm) Blade |
| Weight | 1.4 lbs. (0.7 kg) |

REPLACEMENT HACK SAW BLADES

| CAT. NO. | UPC NO. | DESCRIPTION | QTY. PER PK |
|----------|---------|--|-------------|
| 333-1218 | 10037 | 12" (305 mm) Bi-metal Blade, 18 Teeth Per Inch | 5 |
| 333-1224 | 10038 | 12" (305 mm) Bi-metal Blade, 24 Teeth Per Inch | 5 |
| 333-1232 | 10039 | 12" (305 mm) Bi-metal Blade, 32 Teeth Per Inch | 5 |

Keyhole Saw



- Ergonomic-style handle with non-slip grip creates a sure and comfortable feel
- Hardened steel blade makes cutting drywall, cement board, plastic and wood quick and easy
- Blade goes through the handle for maximum support of the cutting blade

| CAT. NO. | UPC NO. | DESCRIPTION |
|----------|---------|------------------------------------|
| 301A | 23641 | Keyhole Saw with 6" Blade (152 mm) |

PVC Saws




- "V" tooth design enables straight cuts on both push and pull saw strokes.
- Resharpenable blade
- Pointed blade nose makes drywall surface penetration easy
- Ergonomic handle is interchangeable with most popular PVC saw brands

| CAT. NO. | UPC NO. | BLADE LENGTH | DESCRIPTION |
|----------|---------|--------------|-------------|
| 322-013 | 00113 | 13" (330 mm) | PVC Saw |

BAND SAWS

Heavy-Duty Band Saw

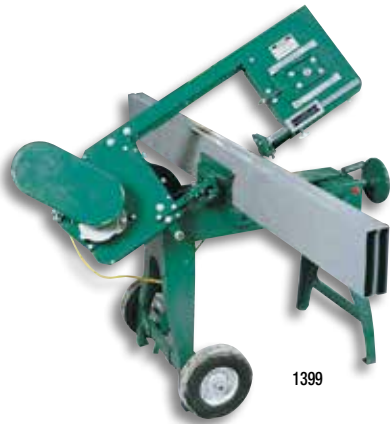

1399


- Cuts up to 8" pipe and 9-1/2" x 11" (241 x 280 mm) tray or duct
- Convertible to wet cutting systems with optional accessories
- Three sawing speeds 76, 141, and 268 feet per minute (23, 43, and 82 meters per minute)
- Converts to vertical in seconds
- Automatic shut-off after cut is complete
- Sturdy wheels for mobility and stability
- Heavy-duty, adjustable hydraulic feed
- Heavy-duty, steel bed with welded steel legs

SPECIFICATIONS

| | |
|---------------------|---|
| Capacity | Rectangular 9-1/2" x 11" (241.3 x 279.4 mm) Round 9-1/2" Dia. or 8" Pipe (241.3 mm) 45° Angle 5-1/2" (139.7 x 139.7 mm) Vertical Work Table 7-5/8" x 10" (193.7 x 254.0 mm) Throat Height 9-1/2" (241.3 mm) Throat Depth 6-1/4" (158.8 mm) |
| Dimensions | 52" H. x 47" L. x 27" W. (13208 H. x 11938 L. x 685.8 W. mm) |
| Power Source | 1399-120 VAC 1/2 Horsepower. 1399-22 - 220 VAC |
| Weight | 346 lbs. (157 kg) |
| Blade Size | 1/2" x .025" x 93" (12.7 mm x 0.64 mm x 2362 mm) |

| CAT. NO. | UPC NO. | DESCRIPTION |
|----------|---------|--|
| 1399 | 31961 | 9-1/2" x 11: Capacity Mobile Band Saw (241.3 x 279.4 mm) |
| 32322 | 32322 | Wet Cutting System for 120VAC 1399 |
| 32237 | 32237 | Vertical Work Table |

Band Saw Blades

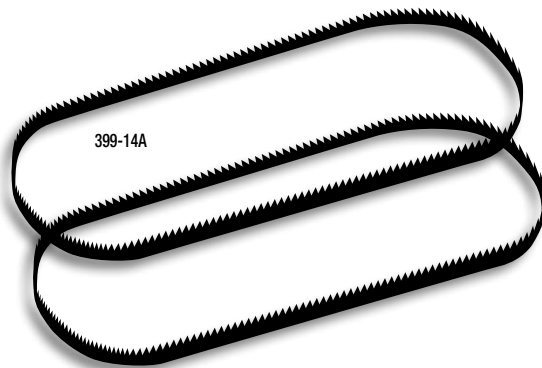

399-14A

- Perfect for your mobile or portable band saw, these top-quality, bi-metal blades feature high-speed steel teeth that can handle even tough metals like stainless steel with ease
- Bi-metal blades feature high-speed tool steel, bonded to an extra-tough alloy back for maximum hardness and heat resistance
- Fits most popular models of portable band saws

MOBILE BAND SAW BLADES

| CAT. NO. | UPC NO. | DESCRIPTION | TYPE | APPLICATION | TEETH PER INCH |
|------------|---------|--|----------|-------------|----------------|
| 399-14A | 32336 | 1/2" x .025" x 93" Mobile Band Saw Blade ¹ | Bi-Metal | Metal | 10.14 |
| 399-18A | 32337 | 1/2" x .025" x 93" Mobile Band Saw Blade ¹ | Bi-Metal | Metal | 18 |
| 399-24A | 32338 | 1/2" x .025" x 93" Mobile Band Saw Blade ¹ | Bi-Metal | Metal | 24 |
| 389-1014-5 | 02593 | 1/2" x .020" x 44 7/8" Portable Saw Blade ² | Bi-Metal | Metal | 10/14 |
| 389-1418-5 | 02594 | 1/2" x .020" x 44 7/8" Portable Saw Blade ² | Bi-Metal | Metal | 14/18 |
| 389-24-5 | 02595 | 1/2" x .020" x 44 7/8" Portable Saw Blade ² | Bi-Metal | Metal | 24 |

¹ Use with 1399 (31961)