1/2" DRIVE DEEP LENGTH PROTOBLACK™ SOCKETS - 12 POINT

- Black oxide finish - hand use only.
- Proto® 12 Point Sockets are ideal for use on stubborn or damaged fasteners, and also on fasteners made from soft materials.
- The TorquePlus™ design is a high performance drive configuration which allows for quick and easy socket engagement to the fastener flats, not the corners.
- The TorquePlus™ configuration employs a radius-corner design, shifting contact area and stress away from the fastener corners and distributing contact stresses over a large area of the socket, minimizing slippage.
- The TorquePlus™ internal design minimizes fastener rounding, helps to extend fastener life, and allows the user to more easily turn worn, rounded, or rusted fasteners.

TORQUEPLUS FASTENING SYSTEM

Product ID No.	in.	B	C	D	E	L	Weight lbs.	ASME Spec.	AS Spec.
J5316B	1/2"	47/64"	55/64"	51/64"	2-1/8"	3-1/4"	.27 lbs.	ASME B107.1	AS954E S3.8.1
J5318B	9/16"	13/16"	55/64"	7/8"	2-1/8"	3-1/4"	.31 lbs.	ASME B107.1	AS954E S3.8.1
J5320B	5/8"	7/8"	7/8"	1-3/16"	2-1/8"	3-1/4"	.28 lbs.	ASME B107.1	AS954E S3.8.1
J5322B	11/16"	61/64"	61/64"	1-3/16"	2-1/8"	3-1/4"	.33 lbs.	ASME B107.1	AS954E S3.8.1
J5324B	3/4"	1-3/64"	1-3/64"	1-3/16"	2-1/8"	3-1/4"	.39 lbs.	ASME B107.1	AS954E S3.8.1
J5326B	13/16"	1-3/32"	1-3/32"	1-3/16"	2-1/8"	3-1/4"	.42 lbs.	ASME B107.1	AS954E S3.8.1
J5328B	7/8"	1-11/64"	1-11/64"	1-3/16"	2-1/8"	3-1/4"	.50 lbs.	ASME B107.1	AS954E S3.8.1
J5330B	15/16"	1-1/4"	1-1/4"	1-3/16"	2-1/8"	3-1/4"	.55 lbs.	ASME B107.1	AS954E S3.8.1
J5332B	1"	1-21/64"	1-21/64"	1-3/16"	2-1/8"	3-1/4"	.59 lbs.	ASME B107.1	AS954E S3.8.1
J5334B	1-1/16"	1-13/32"	1-13/32"	1-3/16"	2-1/8"	3-1/4"	.69 lbs.	ASME B107.1	AS954E S3.8.1
J5336B	1-1/8"	1-31/64"	1-31/64"	1-3/16"	2-1/8"	3-1/4"	.76 lbs.	ASME B107.1	AS954E S3.8.1
J5340B	1-1/4"	1-37/64"	1-37/64"	1-3/16"	2-1/8"	3-1/4"	.79 lbs.	ASME B107.1	AS954E S3.8.1

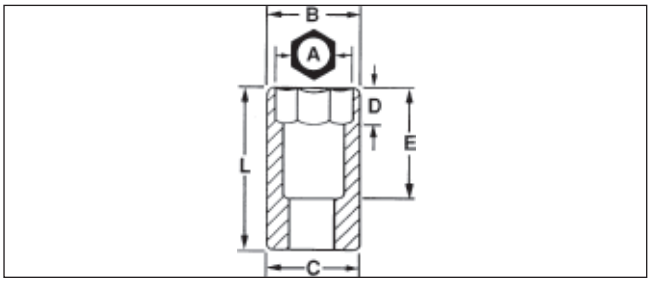

WARNING: WORK SAFELY WITH TOOLS WEAR SAFETY GOGGLES.