1/2" DRIVE IMPACT SOCKETS - 6 POINT

- Proto® 6 Point Impact Sockets are ideal for use on stubborn or damaged fasteners, and also on fasteners made from soft materials.
- TorquePlus™ features apply.

TORQUEPLUS FASTENING SYSTEM

Product #	Size (in) (A)	Nut End Outside Dia. (in) (B)	Drive End Outside Dia. (in) (C)	Nut Depth (in) (D)	Bolt Clearance Depth (in) (E)	Overall Length (in) (L)	Weight (lbs)
J7412H	3/8	41/64	15/16	11/32	27/32	1-1/2	0.17
J7414H	7/16	23/32	15/16	13/32	27/32	1-1/2	0.18
J7416H	1/2	51/64	15/16	13/32	27/32	1-1/2	0.18
J7418H	9/16	7/8	15/16	7/16	27/32	1-1/2	0.18
J7420H	5/8	1	1	1/2	27/32	1-1/2	0.20
J7422H	11/16	1-1/32	1-1/32	1/2	27/32	1-1/2	0.22
J7424H	3/4	1-7/64	1-7/64	51/64	27/32	1-1/2	0.24
J7426H	13/16	1-13/64	1-13/64	11/16	31/32	1-5/8	0.31
J7428H	7/8	1-17/64	1-9/32	43/64	31/32	1-5/8	0.34
J7430H	15/16	1-23/64	1-23/64	51/64	1-3/32	1-3/4	0.44
J7432H	1	1-1/2	1-1/2	25/32	1-3/32	1-3/4	0.55
J7434H	1-1/16	1-33/64	1-33/64	25/32	1-3/32	1-3/4	0.53
J7436H	1-1/8	1-19/32	1-19/32	25/32	1-1/32	2	0.65
J7438H	1-3/16	1-19/32	1-19/32	3/4	1-1/64	2	0.85
J7440H	1-1/4	1-3/4	1-3/4	3/4	1-3/4	2	0.78
J7442H	1-5/16	1-3/4	1-3/4	13/16	63/64	2	0.73
J7444H	1-3/8	1-51/64	1-5/8	15/16	1-3/32	2-1/8	0.72
J7446H	1-7/16	1-59/64	1-5/8	1	1-37/64	2-15/64	0.87
J7448H	1-1/2	2	1-5/8	1	1-37/64	2-15/64	1.03
J7450H	1-9/16	2-1/32	1-5/8	1	1-1/2	2-1/4	1.16
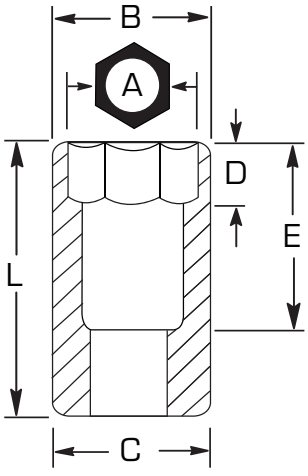
ASME B107.2