1/2" DRIVE METRIC DEEP SOCKETS - 12 POINT

METRIC

- Proto® 12 Point Sockets are ideal for use on stubborn or damaged fasteners, and also on fasteners made from soft materials.
- TorquePlus™ features apply.

TORQUEPLUS FASTENING SYSTEM
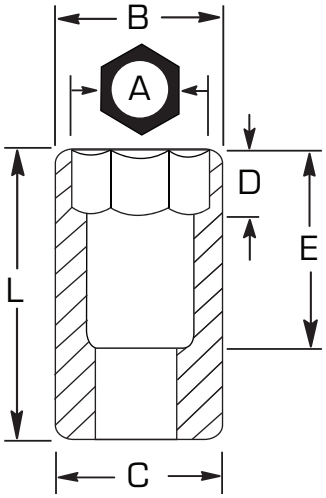
Product #	Size (mm) (A)	Nut End Outside Dia. (in) (B)	Drive End Outside Dia. (in) (C)	Nut Depth (in) (D)	Bolt Clearance Depth (in) (E)	Overall Length (in) (L)	Weight (lbs)
J5310M	10	39/64	55/640	19/32	2-3/32	3-1/4	0.25
J5311M	11	45/64	55/64	5/8	2-3/32	3-1/4	0.25
J5312M	12	47/64	55/64	43/64	2-3/32	3-1/4	0.26
J5313M	13	3/4	55/64	43/64	2-3/32	3-1/4	0.26
J5314M	14	27/32	27/32	15/16	2-3/32	3-1/4	0.30
J5315M	15	55/64	55/64	1-1/16	2-3/32	3-1/4	0.32
J5316M	16	55/64	55/64	1-3/16	2-3/32	3-1/4	0.32
J5317M	17	61/64	61/64	1-3/16	2-3/32	3-1/4	0.33
J5318M	18	63/64	63/64	1-3/16	2-3/32	3-1/4	0.33
J5319M	19	1-3/64	1-3/64	1-3/16	2-3/32	3-1/4	0.37
J5320M	20	1-3/32	1-3/32	1-3/16	2-3/32	3-1/4	0.46
J5321M	21	1-3/32	1-3/32	1-3/16	2-3/32	3-1/4	0.51
J5322M	22	1-11/64	1-11/64	1-3/16	2-3/32	3-1/4	0.51
J5323M	23	1-13/64	1-13/64	1-3/16	2-3/32	3-1/4	0.51
J5324M	24	1-1/4	1-1/4	1-3/16	2-3/32	3-1/4	0.51
J5325M	25	1-5/16	1-5/16	1-3/16	2-3/32	3-1/4	0.62
J5326M	26	1-21/64	1-21/64	1-3/16	2-3/32	3-1/4	0.63
J5327M	27	1-1/64	1-1/64	1-7/64	2-3/32	3-1/4	0.65
J5328M	28	1-3/32	1-31/64	1-7/64	2-3/32	3-1/4	0.68
J5329M	29	1-31/64	1-31/64	1-7/64	2-3/32	3-1/4	0.68
J5330M	30	1-9/16	1-9/16	1-7/64	2-5/8	3-1/4	0.70
J5331M	31	1-39/64	1-39/64	1-7/64	2-5/8	3-1/4	0.73
J5332M	32	1-39/64	1-39/64	1-7/64	2-5/8	3-1/4	0.73
J5336M	36	1-31/32	1-31/32	1-7/64	2-5/8	3-1/4	0.99
					AS954E S3.8.1		ASME B107.5M