


16 (25) mm<sup>2</sup>, 101 A, ground terminal

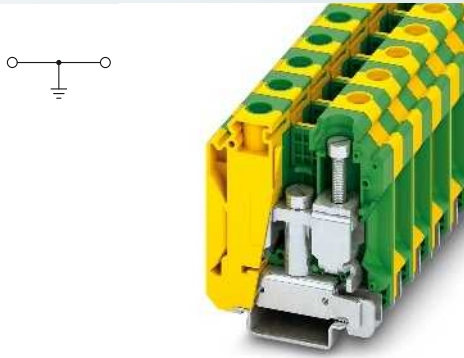

35 (35) mm<sup>2</sup>, 125 A, ground terminal

Ex: EAC Ex  
 KEMA 99ATEX4487U / IECEx KEM 06.0035U

Technical data			
Width	Length	Height NS 35/7,5	
12.2	42.5	54	
Width	Length	Height NS 32	
12.2	42.5	59	
$I_{max}$ [A]	Max. Ø [mm <sup>2</sup> ]	AWG (UL)	
101	2.5 - 25	22-4	
IEC 60947-7-2			
IEC	UL	CSA	IEC/EN 60079-7
-	-	-	-
76 / 16	-	-	- / 16
16	-	-	4-16
12 - 4	22-4	22-4	12 - 4
Solid	Stranded	Ferrule without/with plastic sleeve	
2.5 - 25	4 - 16	1.5 - 16	1.5 - 16
1.5 - 6	1.5 - 4	1.5 - 6	-
-	-	-	0.75 - 10
11			
M4			
M4 / 1.5 - 1.8			
M4 / 1.5 - 1.8			
PA			
V0			

Technical data			
Width	Length	Height NS 35/7,5	
16	53.4	62	
Width	Length	Height NS 32	
16	53.4	-	
$I_{max}$ [A]	Max. Ø [mm <sup>2</sup> ]	AWG (UL)	
125	10 - 35	-	
IEC 60947-7-2			
IEC	UL	CSA	IEC/EN 60079-7
-	-	-	-
125 / 35	-	-	-
35	-	-	-
8 - 2	-	-	-
Solid	Stranded	Ferrule without/with plastic sleeve	
10 - 35	10 - 35	10 - 35	10 - 35
6 - 16	6 - 10	6 - 10	-
-	-	-	6 - 10
16			
M6			
M6 / 3.2 - 3.7			
M5 / 2.5 - 3			
PA			
V0			

Ordering data		
Type	Order No.	Pcs. / Pkt.
USLKG 16 N	0443023	50
USLKG 16 N-1	0443036	50

Ordering data		
Type	Order No.	Pcs. / Pkt.
USLKG 35 N	3074143	50

Accessories <sup>1)</sup>		
SZS 1,0X4,0 VDE	1205066	10
ZB 12 (see Catalog 5)		

Accessories <sup>1)</sup>		
SZS 1,0X6,5 VDE	1205079	10
ZB 16,3 (see Catalog 5)		