


Fuse terminal blocks and lever-type disconnect terminal blocks of the same shape

Notes:
¹⁾ For additional accessories and technical data, see page 40.
²⁾ If the fuse is faulty, the downstream circuit is not off load.
³⁾ For max. power dissipation, see page 616.
⁴⁾ The current is determined by the fuse used, the voltage by the light indicator.
For lever marking, please use marking material with a 5.2 mm pitch.




10 A, lever-type fuse terminal block for 5 x 20 mm cartridge fuses

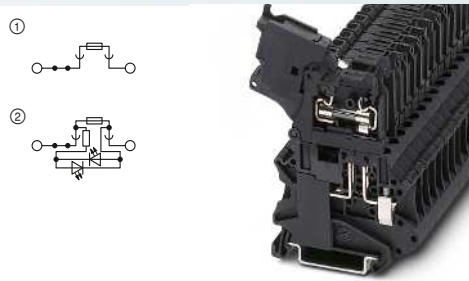

Technical data ¹⁾				
Width	Length	Height		
6.2	57.8	73 (NS 35/7,5)		
I_{max} [A]	U_{max} [V]	max. Ø [mm ²]	AWG (UL)	
10 ³⁾	500 ⁴⁾	0.14 - 6	26-10	
32 (FBS) / 24 (FBSR)				
IEC	UL / CUL	CSA	Ex	
500 ⁴⁾	600	600	-	
Nominal current / cross section	[A] / [mm ²]	6.3 / -	6.3 / -	

Ordering data				
Type	Order No.	Pcs. / Pkt.		
UT 4-HESI (5X20)	① 3046032	50		
UT 4-HESILED 24 (5X20)	② 3046090	50		
UT 4-HESILED 24 (5X20) 120KOHM	② 3248005	50		
UT 4-HESILED 60 (5X20)	② 3046126	50		
UT 4-HESILA 250 (5X20)	② 3046100	50		

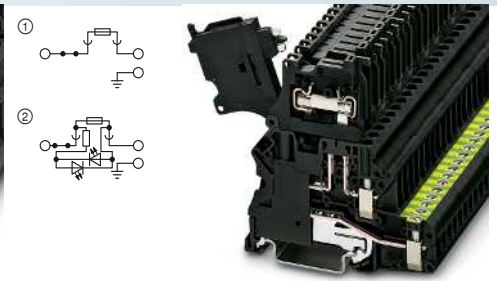

6.3 A, lever-type fuse terminal block for 5 x 20 mm cartridge fuses, with PE foot




Technical data ¹⁾				
Width	Length	Height		
6.2	70.8	73 (NS 35/7,5)		
I_{max} [A]	U_{max} [V]	max. Ø [mm ²]	AWG (UL)	
6.3 ³⁾	500 ⁴⁾	0.14 - 6	26-10	
32 (FBS) / 24 (FBSR)				
IEC	UL / CUL	CSA	Ex	
500 ⁴⁾	600	600	-	
Nominal current / cross section	[A] / [mm ²]	6.3 / 1	10 / -	

Ordering data				
Type	Order No.	Pcs. / Pkt.		
UT 4-PE/HESI (5X20)	① 3073995	50		
UT 4-PE/HESI LED 24 (5X20)	② 3070053	50		
UT 4-PE/HESILED 60 (5X20)	② 3070066	50		
UT 4-PE/HESI LA 250 (5X20)	② 3070079	50		

Fuse terminal blocks and lever-type disconnect terminal blocks of the same shape

– The lever-type disconnect terminal blocks are the same shape as the respective lever-type fuse terminal blocks

Notes:
¹⁾ For additional accessories and technical data, see page 40.
For lever marking, please use marking material with a 5.2 mm pitch.

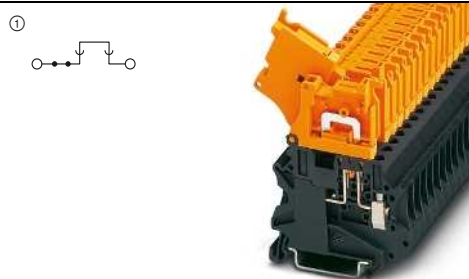


20 A, lever-type disconnect terminal block, same shape



Technical data ¹⁾				
Width	Length	Height		
6.2	57.8	73 (NS 35/7,5)		
I_{max} [A]	U_{max} [V]	max. Ø [mm ²]	AWG (UL)	
20	500	0.14 - 6	26-10	
32 (FBS) / 24 (FBSR)				
IEC	UL / CUL	CSA	Ex	
500	600	600	-	
Nominal current / cross section	[A] / [mm ²]	20 / 2.5	16 / -	

Ordering data				
Type	Order No.	Pcs. / Pkt.		
UT 4-HEDI	① 3046249	50		
UT 4-HEDI-P/P	① 3046252	50		

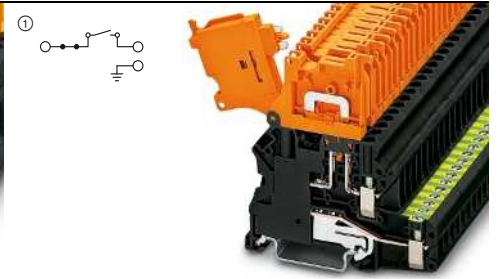

20 A, lever-type disconnect terminal block, same shape, with PE foot



Technical data ¹⁾				
Width	Length	Height		
6.2	70.8	73 (NS 35/7,5)		
I_{max} [A]	U_{max} [V]	max. Ø [mm ²]	AWG (UL)	
20	500	0.14 - 6	26-10	
32 (FBS) / 24 (FBSR)				
IEC	UL / CUL	CSA	Ex	
500	600	600	-	
Nominal current / cross section	[A] / [mm ²]	20 / 2.5	16 / -	

Ordering data				
Type	Order No.	Pcs. / Pkt.		
UT 4-PE/HEDI	① 3074004	50		