EPOXY

# AS5400 SYSTEM ANTI-SLIP ONE-STEP EPOXY




† When primed with 9100 System – DTM Epoxy Mastic

Labor-saving, anti-slip epoxy, in one step, protects pedestrian grade floors with ease.

- Easy-to-use, single component for fast application
- Ridged profile handles heavy foot traffic and/or light vehicle traffic
- Can be resealed for multi-use areas subjected to mild chemicals, occasional steam and chemical cleaning
- For indoor and outdoor use
- Dries quickly — return to service in 24 hr. for heavy traffic
- Coefficient of friction — Dry: 1.17, Wet: 1.00
- USDA acceptable* and Agriculture Canada** compliant

### COLORS
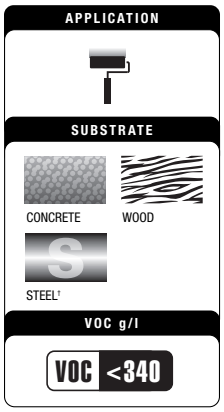
| | |
|---|---|
| AS5471402 | Dunes Tan |
| AS5468402 | Tile Red |
| AS5486402 | Navy Gray |
| AS5482402 | Silver Gray |
| AS5479402 | Black |

### SAFETY COLORS

| | |
|---|---|
| AS5444402 | Safety Yellow |




COATING PROFILE

**TYPICAL APPLICATIONS** Floor coating for aisles, decks, walkways, stairs, machine operating areas and entrances/exits.

EPOXY

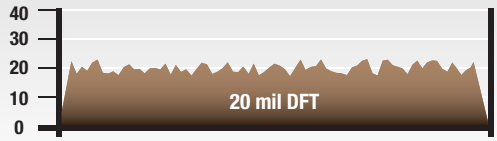


COATING PROFILE

**TYPICAL APPLICATIONS** Floor coating for barefoot recreational areas, locker rooms, hotel pools, restrooms, showers, laundries and walkways.

# AS6000 SYSTEM ANTI-SLIP LOW PROFILE EPOXY

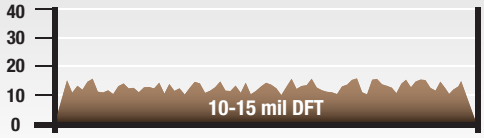


Low VOC, water-based anti-slip floor epoxy acts as a safeguard on barefoot grade floors.

- Use anywhere extra protection is needed from slips and falls in barefoot and wet recreational environments
- For indoor and outdoor use
- Dries quickly — return to service in 24 hr. for light traffic/48 hr. heavy traffic
- Coefficient of friction — Dry: 0.78, Wet: 0.86
- USDA acceptable* and Agriculture Canada** compliant

*Available in two-component (1 gallon activated) kit of base and activator.*

### COLORS
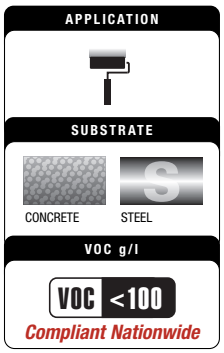
| | |
|---|---|
| AS6086425 | Navy Gray |
| AS6082425 | Silver Gray |