

# CAB® Cable Clips

## In Round and Flat Wire Designs



Round Wire  
CAB 314  
CAB 315

### CAB Round Wire Cable Clips

Strong, versatile hangers for supporting pipe or cables from messenger wire, plates, wire mesh or other structure. Made from .156 (4mm) high carbon spring steel wire with 5/8" (16mm) diameter top loops. CAB 961 is an extra long style for running multiple cables.

**CAB 314** 3-5/8" (92mm) dia., 6-1/2" (165mm) long, 100/box, 13 lbs. (5.9kg)

**CAB 315** 4-1/2" (114mm) dia., 7-3/8" (187mm) long, 50/box, 11 lbs. (5kg)

**CAB 961** 6" (152mm) dia., 11" (279mm) long, 50/box, 13 lbs. (5.9kg)



Round Wire  
CAB 961



100% Coated  
Round Wire  
CAB 929  
CAB 936

### CAB 100% Plastisol Coated Round Wire Cable Clips

Manufactured as other round wire cable clips but coated over the entire surface with CAB plastisol for total insulation and corrosion resistance. 7/16" (11mm) diameter top loops.

**CAB 929** 3-5/8" (92mm) dia., 6-5/8" (168mm) long, 100/box, 16 lbs. (7.3kg)

**CAB 936** 4-1/2" (114mm) dia., 7-1/2" (191mm) long, 50/box, 12 lbs. (5.5kg)

### CAB Flat Wire Cable Clips

Provide a safe, insulated 1/2" (13mm) wide surface carrying area for all types of cables. Easy to squeeze and latch for quick installation. Top loops receive special machine forming for additional weight carrying capacity. Corners are rounded for added safety. Made from 1/16" x 3/8" (2mm x 10mm) flat spring steel. 7/16" (11mm) diameter top loops.


**CAB 300** 2" (51mm) dia., 3-7/8" (98mm) long, 100/box, 13 lbs. (5.9kg)

**CAB 299** 2-5/8" (67mm) dia., 4-5/8" (117mm) long, 100/box, 15 lbs. (6.8kg)

**CAB 298** 3-7/8" (98mm) dia., 6-3/4" (171mm) long, 50/box, 9 lbs. (4.1kg)

**CAB 940** 4" (102mm) dia., 10" (254mm) long, 50/box, 15 lbs. (6.8kg)

**CAB 301** 4" (102mm) dia., 18" (457mm) long, 50/box, 18 lbs. (8.2kg)

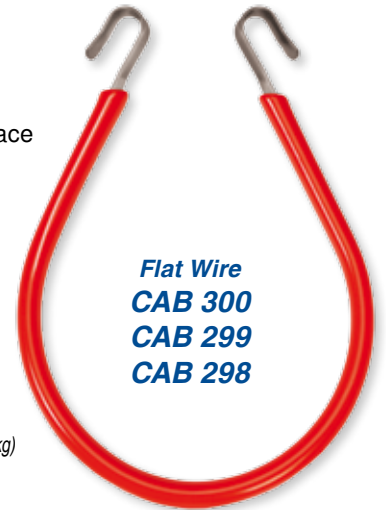

Flat Wire  
CAB 300  
CAB 299  
CAB 298

### CAB 100% Plastisol Coated Flat Wire Cable Clips


Manufactured as other flat wire cable clips but coated over the entire surface with abrasion resistant, high dielectric grade plastisol for total insulation and corrosion resistance. .591" (15mm) diameter loops.

**CAB 934** 2" (51mm) dia., 4" (102mm) long, 100/box, 12 lbs. (5.5kg)


**CAB 932** 2-5/8" (67mm) dia., 4-3/4" (121mm) long, 100/box, 15 lbs. (6.8kg)

**CAB 931** 3-7/8" (98mm) dia., 6-3/4" (171mm) long, 50/box, 10 lbs. (4.5kg)

**CAB 933** 6" (152mm) dia., 9-3/4" (248mm) long, 25/box, 9 lbs. (4.1kg)

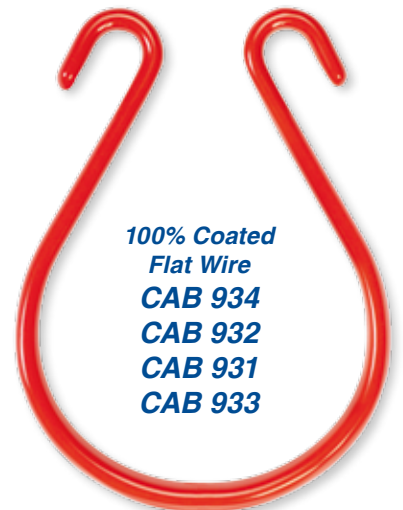


100% Coated  
Flat Wire  
CAB 934  
CAB 932  
CAB 931  
CAB 933

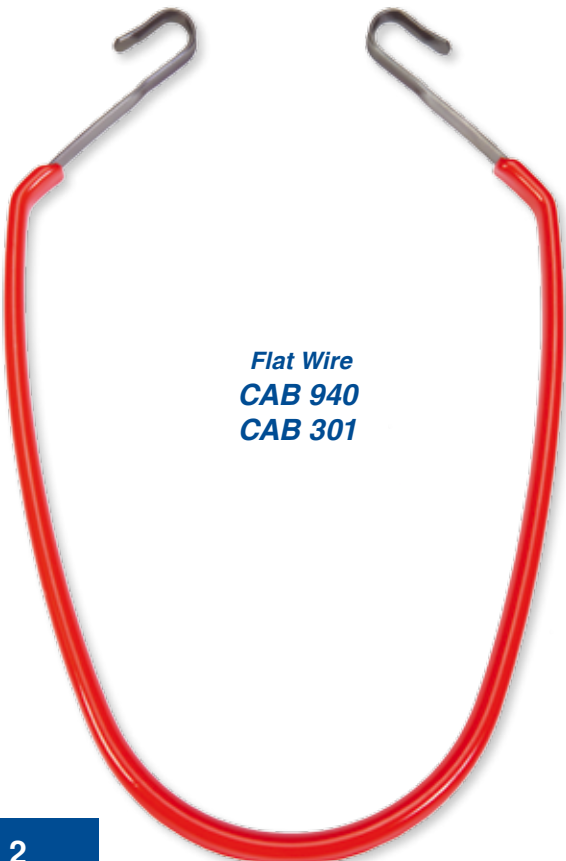

Flat Wire  
CAB 940  
CAB 301

**Strong, Durable CAB Hangers Provide Added Safety and Protection in Mines.**

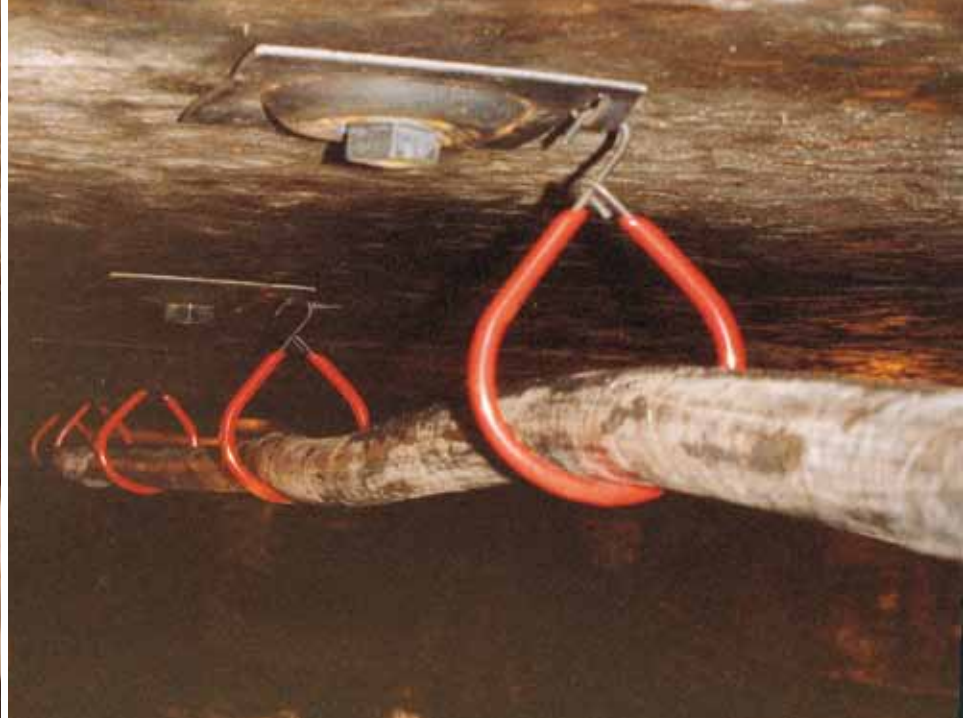

**Versatile CAB Cable Clips safely suspend all types of electrical cables.**

**All hanger carrying surfaces are fully insulated with a tough, high dielectric grade, flame retardant plastisol coating.**

**CAB Latchbacks** are high quality hangers designed for supporting hose, pipe and cable from roof bolt plates, spads, wire mesh or structure. Manufactured from high tensile spring steel for maximum strength with a 5/8" (16mm) diameter top installation loop. CAB 321 same as 320, but top loop is offset 90° to carrier section.

**CAB 320** 3-5/8" (92mm) dia., .156 (4mm) wire, 7" (178mm) long, 100/box, 15 lbs (6.8kg)

**CAB 321** 3-5/8" (92mm) dia., .156 (4mm) wire, 7" (178mm) long, 90° offset loop, 50/box, 9 lbs (4.1kg)

**CAB 308** 4-1/2" (114mm) dia., .156 (4mm) wire, 8" (203mm) long, 50/box, 9 lbs (4.1kg)

**CAB 306** 4-1/2" (114mm) dia., .187 (4.7mm) wire, 8" (203mm) long, 50/box, 12 lbs (5.5kg)



**Super Latchback CAB 3704**

**CAB Super Latchbacks** are made from .187 (4.7mm) high tensile spring steel and feature a large capacity 4-1/2" (114mm) diameter carrier. For easier installation, hanger has extra large 1-3/8" (35mm) diameter 90° offset top installation loop.

**CAB 3704** 4-1/2" (114mm) dia., .187 (4.7mm) wire, 9-1/2" (241mm) long, 50/box, 13 lbs (5.9kg)



**Latchback CAB 320 CAB 321 CAB 308 CAB 306**

*For total corrosion resistance in underground applications, use CAB 100% PVC Coated Cable Clips shown on page 2 or CAB Bosserman Clips shown on page 5.*

# CAB® U-Hangers with Crossbars



**U-Hanger  
with Standard  
Crossbar**  
**CAB 316**  
**CAB 335**  
**CAB 336**

**CAB U-Hangers** feature a locking crossbar to retain cables in the hanger and a large 7/8" (22mm) diameter top loop for easy installation. These strong hangers are made for supporting all types of cables, pipe and tubing from roof bolt plates, spads, or other structure.

The carrying surfaces of CAB U-Hangers receive a heavy coating of high dielectric grade plastisol for maximum insulation and abrasion resistance. Made from .187 (4.7mm) high carbon spring steel wire for maximum strength and carrying capacity.

## **CAB U-Hangers with Standard Crossbars**

This is one of the most popular and versatile hangers for underground cable support. Offered in 3 standard sizes.

**CAB 316** 3" (76mm) dia., 4-1/2" (114mm) long, 100/box, 17 lbs. (7.7kg)

**CAB 335** 4" (102mm) dia., 6" (152mm) long, 50/box, 11 lbs. (5.0kg)

**CAB 336** 5" (127mm) dia., 7" (178mm) long, 50/box, 13 lbs. (5.9kg)

## **CAB U-Hangers with Safety-Tip Crossbars**

Constructed the same way as standard U-Hangers but feature a rounded safety tip on the end of the crossbar. Prevents snagging during installations, when crossbars are left unlatched or in low roof conditions.

**CAB 221** 3" (76mm) dia., 4-1/2" (114mm) long, 100/box, 17 lbs. (7.7kg)

**CAB 344** 4" (102mm) dia., 5-7/8" (149mm) long, 50/box, 12 lbs. (5.5kg)

**CAB 222** 5" (127mm) dia., 7-1/8" (181mm) long, 50/box, 14 lbs. (6.4kg)




**U-Hanger  
with Safety Tip  
Crossbar**  
**CAB 221**  
**CAB 344**  
**CAB 222**

## **CAB Bulldog Pipe Saddles**

Quickly snaps on pipe to securely retain a pressurized hose or cable in fixed position on pipe. Manufactured from .187 (4.7mm) spring steel, totally plastisol coated for corrosion resistance and slippage reduction. Especially useful in methane drainage applications. Two standard sizes, other sizes available.

**CAB 873** 4" (102mm) dia., 100/box, 15 lbs. (6.8kg)

**CAB 874** 6" (152mm) dia., 50/box, 12 lbs. (5.5kg)

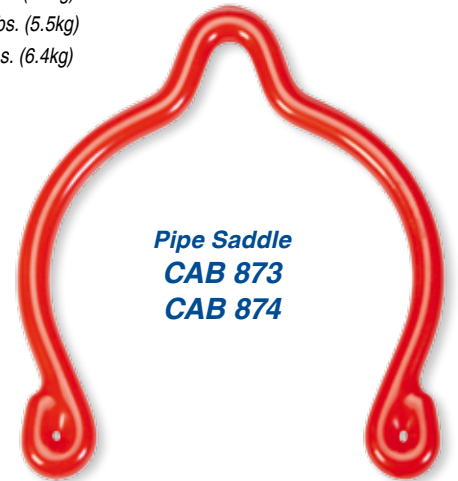

**Pipe Saddle**  
**CAB 873**  
**CAB 874**



**CAB® Brattice Hangers**  
**Install brattice cloth quickly and easily**  
**No hammers or nails needed**  
**Save on tire repairs and injuries**

**CAB 3703**  
**CAB 7647**

**CAB Brattice Hangers** are designed to quickly and easily suspend brattice cloth from the mine roof. Sharp offset tip keeps brattice tight to the roof. Made from .187 (4.7mm) wire, 7" (178mm) long with 1-1/8" (29mm) or 1-1/2" (38mm) diameter hole. For proper installation, hanger must be placed on end of roof bolt between the plate and the roof of the mine.

**CAB 3703** 1-1/8" (29mm) dia. hole, 200/box, 17 lbs. (7.7kg)


**CAB 7647** 1-1/2" (38mm) dia. hole, 200/box, 19 lbs. (8.6kg)

**CAB Brattice Hangers  
make a tough job easier,  
and they cut down  
on accidents too!**



# CAB® Bosserman Clips

**CAB Bosserman Clips** are widely respected for their superior ability to safely suspend electrical cables and wiring in a variety of underground applications. CAB Bosserman Clips feature a 100% plastisol coated high tensile spring steel body and locking arm to prevent pull out and slippage. This improved hanger combines all the advantages of steel and plastic for the highest level of performance and safety underground.

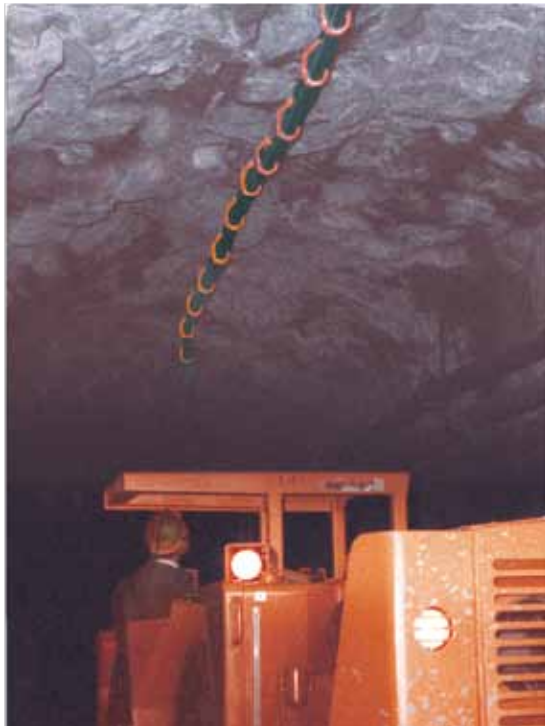

**Bosserman Clips keep cables safely up and out of the way of moving equipment.**



**The Bosserman Clip is CAB's strongest, most corrosion resistant mine hanger.**



**Bosserman Clip**  
**CAB 814 - 820**  
**CAB 821 - 828**  
**CAB 950 - 956**



**CAB® Bosserman Clips**

## Advantages of Bosserman Clips

1. Corrosion and rust problems are virtually eliminated due to the heavy plastisol coating over the entire metal surface of the Bosserman Clip. This rustproofing protection will outlast other typical methods of rustproofing and will result in significant cost savings and improved safety.
2. Slippage of hangers on the messenger wire is no longer a problem due to the slip resistance of the plastisol in the attachment section of the clip. Uniform spacing of hangers without this slippage will keep wires more safely up and out of the way.
3. High dielectric grade plastisol applied on 100% of the hanger surface makes the Bosserman Clip totally insulated and spark resistant. Provides for maximum safety in the suspension of electric cables and wiring in all underground applications.
4. Extra Long Styles available for running 2 cables separately from 1 messenger wire or large bundles of cables. Also available with 1" (25mm) wide saddles in the cable carrying section for extra support of cables.

### **Bosserman Clip 1/4" (6mm) Lock**

**CAB 814** 1" (25mm) dia., 200/box, 13 lbs. (5.9kg)  
**CAB 815** 2" (51mm) dia., 100/box, 13 lbs. (5.9kg)  
**CAB 816** 3" (76mm) dia., 50/box, 9 lbs. (4.1kg)  
**CAB 817** 4" (102mm) dia., 50/box, 16 lbs. (7.3kg)  
**CAB 818** 5" (127mm) dia., 25/box, 9 lbs. (4.1kg)  
**CAB 819** 6" (152mm) dia., 25/box, 10 lbs. (4.5kg)  
**CAB 820** 8" (203mm) dia., 25/box, 13 lbs. (5.9kg)

### **Bosserman Clip 3/8" (10mm) Lock**

**CAB 821** 1" (25mm) dia., 200/box, 13 lbs. (5.9kg)  
**CAB 822** 2" (51mm) dia., 100/box, 13 lbs. (5.9kg)  
**CAB 823** 3" (76mm) dia., 50/box, 9 lbs. (4.1kg)  
**CAB 824** 4" (102mm) dia., 50/box, 16 lbs. (7.3kg)  
**CAB 825** 5" (127mm) dia., 25/box, 9 lbs. (4.1kg)  
**CAB 826** 6" (152mm) dia., 25/box, 10 lbs. (4.5kg)  
**CAB 828** 8" (203mm) dia., 25/box, 13 lbs. (5.9kg)

### **Bosserman Clip 1/2" (13mm) Lock**

**CAB 950** 1" (25mm) dia., 200/box, 13 lbs. (5.9kg)  
**CAB 951** 2" (51mm) dia., 100/box, 13 lbs. (5.9kg)  
**CAB 952** 3" (76mm) dia., 50/box, 9 lbs. (4.1kg)  
**CAB 953** 4" (102mm) dia., 50/box, 16 lbs. (7.3kg)  
**CAB 954** 5" (127mm) dia., 25/box, 9 lbs. (4.1kg)  
**CAB 955** 6" (152mm) dia., 25/box, 10 lbs. (4.5kg)  
**CAB 956** 8" (203mm) dia., 25/box, 13 lbs. (5.9kg)

For total corrosion resistance and insulation in above ground applications, use CAB Rings which are outlined on page 14.