

Kellems® Wire Management Products
Wire Rope Splicing Grips
Splicing Grips



Features

- Galvanized steel meshes constructed in triple, double and single weave
- Non-rotating barrel



Ordering Information

| Description | Cable Diameter Range Inches(cm) | UPC | Catalog Number |
|--|---------------------------------|--------------|----------------|
| Non -rotating Wire Rope Grips, Triple, Double and Single Weave | 3/4"- 7/8" (1.90-2.22) | 783585317175 | 03316002 |

Listings


CSA Certified

Specifications

| | |
|-------------|------------------|
| Strand | Galvanized Steel |
| Strand Tabs | Copper |
| Fastener | Plastic |
| Tag | Mylar |

Performance

| Mechanical | |
|--|--|
| Approximate Breaking Strength | 12,500 (55,600) |
| Approximate Strength of Grip per Foot Working Load | 6.75 (1.90) (program formula 5% of Approximate Breaking Strength) |

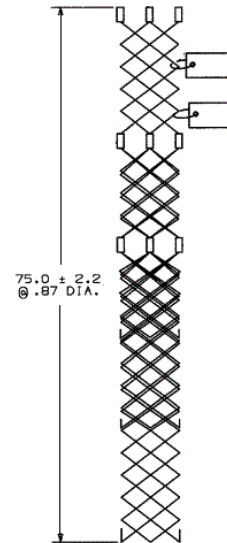

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

