


Technical Information Bulletin - LED

E-Lume™

ORDERING INFORMATION

Order code: 62852
 Description: LED/OMNI/7W/27K/ND/ELUME
 UPC: 69549628526
 Case quantity: 48

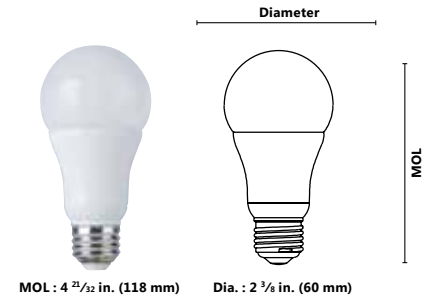

PERFORMANCE DATA


Shape:	OMNI
Wattage (W):	7
Lamp voltage (VAC):	120
Colour temperature (K)**:	2 700
Average life (L70 hours):	25 000
Initial lumens (lm)*:	450
Initial lumens per watt (lm/W):	64
CBCP:	-
CRI:	80
Beam angle:	215
Power factor:	≥ 0.54
Operating temperature range:	-20 °C/4 °F to 45 °C/113 °F
Base:	E26

*Initial lumens range: +/- 5 %

**Typical colour temperature range: +/- 5 %



BEAM SPREAD

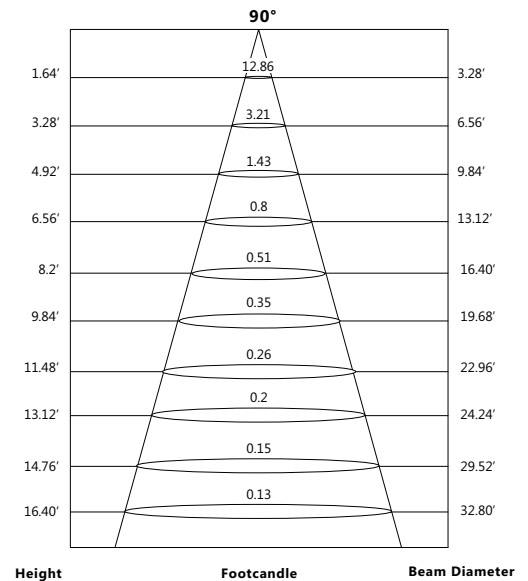

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electric shock – do not use where directly exposed to water or weather.
- Suitable for use in open fixtures.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Not suitable for use on dimming circuits.
- Three year limited warranty.
- For warranty information visit www.standardpro.com.
- Operating temperature: -20 °C/4 °F to 45 °C/113 °F.

NOTES: This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. This product may cause interference with other devices. If interference occurs, change the location of the product. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. This RFLD device complies with Canadian ICES-003. LED lamps must be stored, operated under suitable environmental conditions and in accordance with, but not limited to, the latest National Electrical Code, cETLus, cULus, CSA and ANSI specifications.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

June 4, 2014

STANDARD™