

Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____



ORDERING INFORMATION

Order code: 63298
 Description: LED/CL11/15W/30K/FM/RND/STD
 UPC: 69549632981
 Case quantity: 1
 Luminaire description: Round LED Ceiling Luminaire

FEATURES AND SPECIFICATIONS

Lens type: Frosted Acrylic Diffuser
Lens benefits: Easy to install twist and lock diffuser
Housing: Simple, functional and low profile design.
Applications: Ideal for use in closets, utility areas, hallways, bedrooms, offices & various residential and commercial applications.
Benefits compared to Traditional Light: Uses less energy than fluorescent lights, lasts longer and is maintenance free.



For a complete list of ENERGY STAR qualified products, please visit www.standardpro.com

FIXTURE PERFORMANCE

Wattage (W): 15
 Colour temperature (K): 3 000
 CRI: 80
 Average life in hours: 50 000
 Lumens: 1 050
 Efficacy with lens (LPW): 70
 Voltage (V): 120
 Hertz (Hz): 60
 mili Amps (mA): 340
 Beam angle: 90°
 Mounting: Surface Mount/Flush-mount

POWER FACTOR (PF)

0.95

TOTAL HARMONIC DISTORTION (THD)

< 20 %

AMBIENT OPERATING TEMPERATURES

-10°C/44°F to 40°C/104°F

COMPATIBLE DIMMER LIST

COOPER: DAL06P, SAL06P and SLC03P
 LEVITON: Decora – 6674 and Illuma Tech IPL06
 LUTRON: Maestro MACL-153P, Diva DVCL-153P, Contour CTCL-153P

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


November 10, 2016

STANDARD™


ORDERING INFORMATION

Order code: 63298
 Description: LED/CL11/15W/30K/FM/RND/STD
 UPC: 69549632981
 Case quantity: 1
 Luminaire description: Round LED Ceiling Luminaire

PHOTOMETRICS - BEAM SPREAD*

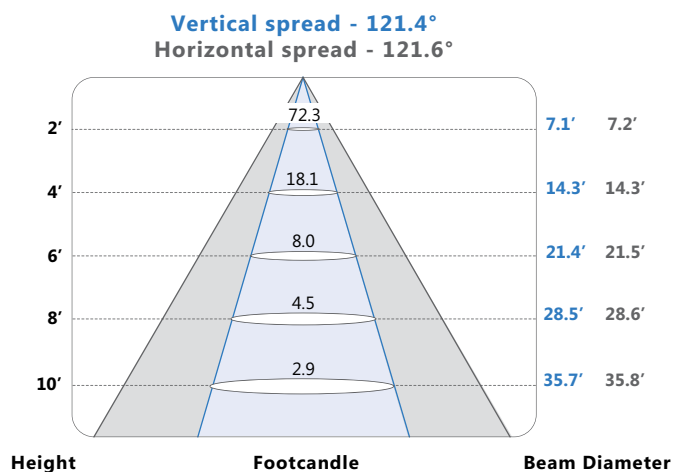

PHOTOMETRICS - CANDELA DISTRIBUTION*

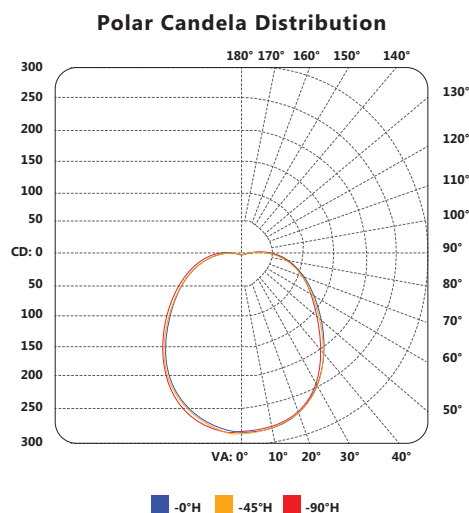

PHOTOMETRICS - COEFFICIENTS OF UTILIZATION (ZONAL CAVITY METHOD)*

RCC %:	80				70				50				30				10				0
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	0			
RCR: 0	1.17	1.17	1.17	1.17	1.13	1.13	1.13	.90	1.05	1.05	1.05	.99	.99	.99	.93	.93	.93	.90			
1	1.04	.98	.93	.88	1.00	.95	.90	.71	.88	.84	.81	.83	.79	.77	.77	.75	.72	.70			
2	.93	.84	.76	.70	.90	.81	.74	.58	.76	.70	.65	.71	.66	.62	.66	.62	.59	.56			
3	.85	.73	.64	.57	.81	.71	.62	.48	.66	.59	.54	.62	.56	.51	.58	.53	.49	.46			
4	.77	.64	.55	.48	.74	.62	.54	.41	.58	.51	.45	.55	.48	.43	.51	.46	.42	.39			
5	.71	.57	.48	.41	.68	.56	.47	.35	.52	.45	.39	.49	.42	.37	.46	.40	.36	.33			
6	.65	.51	.42	.35	.63	.50	.41	.31	.47	.39	.34	.44	.38	.33	.42	.36	.31	.29			
7	.60	.46	.37	.31	.58	.45	.37	.27	.43	.35	.30	.40	.34	.29	.38	.32	.28	.26			
8	.56	.42	.34	.28	.54	.41	.33	.24	.39	.32	.26	.37	.30	.26	.35	.29	.25	.23			
9	.52	.39	.30	.25	.51	.38	.30	.22	.36	.29	.24	.34	.28	.23	.32	.27	.22	.20			
10	.49	.36	.28	.22	.47	.35	.27	.20	.33	.26	.21	.31	.25	.21	.30	.24	.20	.18			

CAN ICES-005 (B) / NMB-005 (B)

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

November 10, 2016

STANDARD™


ORDERING INFORMATION

Order code: 63298
 Description: LED/CL11/15W/30K/FM/RND/STD
 UPC: 69549632981
 Case quantity: 1
 Luminaire description: Round LED Ceiling Luminaire

DIMENSIONS

Length: 11" (27.94 cm)
 Diameter: 11" (27.94 cm)
 Width: -
 Depth: 3.5" (8.89 cm)

TECHNICAL DRAWINGS

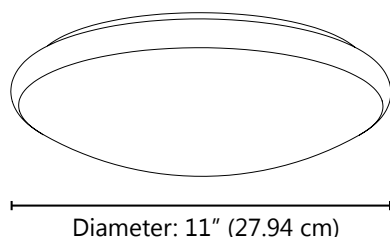

WARNINGS

- Installation and maintenance must be performed by licensed electricians only.
- To avoid risk of electric shock, make sure to turn off main power switch prior to installation or maintenance.
- Must be installed in compliance with Canadian Electrical Code in Canada or National Electrical Code (NEC) in the US.
- Make sure input voltage and frequency are compatible with the fixture. Check installation guide for power requirements prior to installation.

WARNING – Risk of electric shock. Suitable for damp locations.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____