

## Miniature Contactor Accessory - Auxiliary Contact

### XTMCXFA40

#### Dimensions:

- **Height:** X
- **Length:** X
- **Width:** X

**Notes:** Screw terminals (6-65A); 5 mm(80-150A); no lugs (185-2000A). Orders must be placed in multiples of package quantity listed.

**Warranties:** No Data

#### Specifications:


- **Type:** Miniature Contactor Accessory - Auxiliary Contact
- **Used With:** XTRM miniature control relays
- **Conventional Thermal Current:** 10A
- **Contact Configuration:** 4NO
- **Number Of Poles:** Four-pole
- **Quantity:** 5
- **Terminals:** Screw terminals

#### Supporting documents:

- [Eatons Volume 5-Motor Control and Protection](#)
- [XTMCXFA40 3D Inventor](#)
- [XTMCXFA40 AutoCAD 2D Footprint](#)
- [XTMCXFA40 AutoCAD 2D Footprint \(mm\)](#)
- [XTMCXFA40 2D Drawing Xchange](#)
- [XTMCXFA40 3D Model Xchange](#)
- [XT IEC power control 580-2600A vacuum contactors](#)
- [Global Data Sheet - XTMCXFA40](#)
- [Eaton Specification Sheet - XTMCXFA40](#)

#### Certifications:

- IEC 60947
- EN 60947
- UL Listed

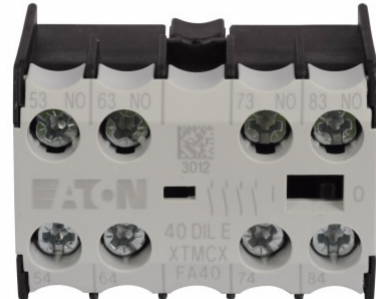

- CSA Certified

**Product compliance:**

- CCC Marked
- CE Marked
- ATEX Compliant

---

© 2016 Eaton. All rights reserved.