

CWS750

SLOPED ARCHITECTURAL CABINET



A PERFECT SLOPED TOP CABINET FOR LARGE SPACES

With an incredible 750 W per linear foot power capacity, the CWS750 architectural cabinet is the perfect unit for public institutions or any other commercial application that requires a high heat output. Its high performance and durability (extruded aluminum grille) have earned it an outstanding reputation. Its sloped top makes it less likely it will be sat on, stepped on or used as a shelf.

SLOPED TOP

MAKING IT LESS LIKELY TO BE SAT ON OR USED AS A SHELF

INCREDIBLE HEAT DENSITY

UP TO 750 W PER LINEAR FOOT

ATTRACTIVE EXTRUDED ALUMINUM GRILLE

PERFECT FOR PUBLIC PLACES CORRIDORS, HOSPITALS, ETC.

BLANK SECTIONS AVAILABLE FOR A CONTINUOUS LOOK



This unit is intended for commercial use. Models with a density greater than 450 W/ft. can become very hot.

IDEAL FOR:

shopping mall, hospital, lobby, corridor

COLOURS

- **standard:** white, soft white
- **Orora (optional):** refer to www.stelpro.com/en-CA/Orora

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 18-gauge steel cabinet, 16-gauge steel front panel and extruded aluminum grilles with a thickness equivalent to 13 gauge
- front air intake and top air discharge
- thermal protection with automatic reset
- full-length wireway

ELEMENTS

- three tubular elements, stainless steel sheathed with boxed aluminum fins for improved heat dissipation; the elements are securely fastened at their centres, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL

- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in tamper-proof thermostat accessible without removing front grille, installed in the left or right junction box (optional)
- low voltage relay kit installed in the left or right junction box (optional)

INSTALLATION

- surface mounted
- wall or floor mounted with or without pedestal kit (optional)
- wiring compartments at both ends of unit
- blank sections (custom lengths) and accessories are available for a continuous look (optional)

WARRANTY

- three years

°STELPRO

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-colour products. For all the latest models and prices, please refer to our website at www.stelpro.com.



FC_CWS750_EN_270420

TECHNICAL SPECIFICATIONS


Density of 750 W per linear foot		Density of 600 W per linear foot		Density of 450 W per linear foot		Voltage	Length		Weight		Price
Code	Watts	Code	Watts	Code	Watts	Volts	mm	in.	kg	lb	
---	1500	CWS7506128*	1200	CWS7506098*	900	208	600	23 5/8	12.7	28	744.00
---	1500	CWS7506122	1200	CWS7506092	900	240	600	23 5/8	12.7	28	744.00
---	1500	CWS7506123	1200	CWS7506093	900	347	600	23 5/8	12.7	28	744.00
---	1500	CWS7506126	1200	CWS7506096	900	600	600	23 5/8	12.7	28	744.00
---	2250	CWS7509188*	1800	CWS7509138*	1350	208	900	35 7/16	17.7	39	836.00
---	2250	CWS7509182	1800	CWS7509132	1350	240	900	35 7/16	17.7	39	836.00
---	2250	CWS7509183	1800	CWS7509133	1350	347	900	35 7/16	17.7	39	836.00
---	2250	CWS7509186*	1800	CWS7509136	1350	600	900	35 7/16	17.7	39	836.00
---	3000	CWS75012248*	2400	CWS75012188*	1800	208	1200	47 1/4	24	53	979.00
---	3000	CWS75012242	2400	CWS75012182	1800	240	1200	47 1/4	24	53	979.00
---	3000	CWS75012243	2400	CWS75012183	1800	347	1200	47 1/4	24	53	979.00
---	3000	CWS75012246*	2400	CWS75012186	1800	600	1200	47 1/4	24	53	979.00
CWS75015378*	3750	CWS75015308*	3000	CWS75015228*	2250	208	1500	59 1/16	29	64	1074.00
CWS75015372	3750	CWS75015302	3000	CWS75015222	2250	240	1500	59 1/16	29	64	1074.00
CWS75015373	3750	CWS75015303	3000	CWS75015223	2250	347	1500	59 1/16	29	64	1074.00
CWS75015376*	3750	CWS75015306*	3000	CWS75015226*	2250	600	1500	59 1/16	29	64	1074.00
CWS75018458*	4500	CWS75018368*	3600	CWS75018278*	2700	208	1800	70 7/8	33.6	74	1107.00
CWS75018452	4500	CWS75018362	3600	CWS75018272	2700	240	1800	70 7/8	33.6	74	1107.00
CWS75018453	4500	CWS75018363	3600	CWS75018273	2700	347	1800	70 7/8	33.6	74	1107.00
CWS75018456*	4500	CWS75018366*	3600	CWS75018276*	2700	600	1800	70 7/8	33.6	74	1107.00
CWS75021528*	5250	CWS75021428*	4200	CWS75021318*	3150	208	2100	82 11/16	38.6	85	1195.00
CWS75021522	5250	CWS75021422	4200	CWS75021312	3150	240	2100	82 11/16	38.6	85	1195.00
CWS75021523	5250	CWS75021423	4200	CWS75021313	3150	347	2100	82 11/16	38.6	85	1195.00
CWS75021526*	5250	CWS75021426*	4200	CWS75021316*	3150	600	2100	82 11/16	38.6	85	1195.00
CWS75024608*	6000	CWS75024488*	4800	CWS75024368*	3600	208	2400	94 1/2	43.5	96	1285.00
CWS75024602	6000	CWS75024482	4800	CWS75024362	3600	240	2400	94 1/2	43.5	96	1285.00
CWS75024603	6000	CWS75024483	4800	CWS75024363	3600	347	2400	94 1/2	43.5	96	1285.00
CWS75024606*	6000	CWS75024486*	4800	CWS75024366*	3600	600	2400	94 1/2	43.5	96	1285.00

Add W for white or SW for soft white (consult the optional colours chart or contact your Stelpro representative for all other colours).

* Add 3 (before the colour code) for three-phase model (available upon request).

Models also available in 277 V and 480 V. --- not available

TECHNICAL DRAWINGS

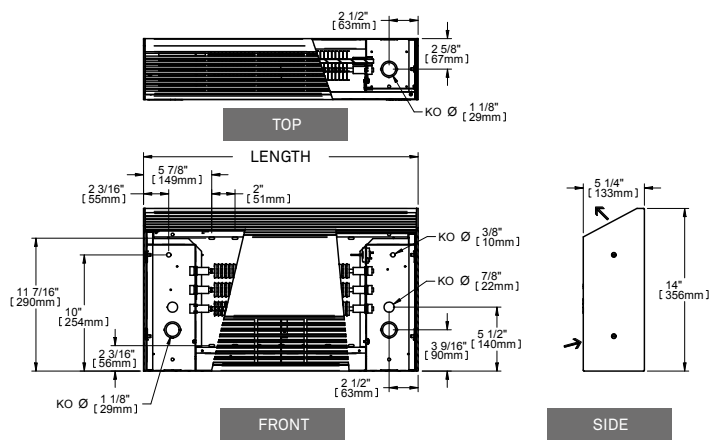

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
CWS750T12*	built-in tamper-proof single pole thermostat	144.00
CWS750T22*	built-in tamper-proof double pole thermostat	240.00
CWS750T33*	built-in tamper-proof triple pole thermostat (3 ph)	302.00
CWS750RE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]	82.50
CWS750RE156*	built-in electronic low voltage relay [6 A @ 600 V]	128.00
CWS750RE153T*	built-in electronic relay c/w transformer 24 V [15 A @ 208 V-347 V]	100.00
CWS750RM240T*	built-in electromechanical relay c/w transformer 24 V [5000 W @ 208 V / 6000 W @ 240 V]	103.00
CWS750RM347T*	built-in electromechanical relay c/w transformer 24 V [6000 W @ 347 V]	114.00
CWS750RM347C*	built-in electromechanical relay w/o transformer 24 V [6000 W @ 120 V-347 V]	86.50
CWS750R841C1151*	built-in electromechanical relay c/w transformer 24 V [6000 W @ 600 V]	165.00
CWS750R841D1036*	built-in electromechanical low voltage relay w/o transformer 24 V [6000 W @ 600 V]	146.00
PK3*	pedestal kit (kit of two)	128.00
CWS750JS*	joiner strip (2 in. – 51 mm)	154.00
CWS750IC90*	inside corner (back measures 9 13/16 in. (249 mm) long on each side)	712.00
CWS750OC90*	outside corner (back measures 9 13/16 in. (249 mm) long on each side)	712.00
CWS750CB**	clean back (fully finished, no mounting holes or knockouts)	166.00

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.

* Add W for white or SW for soft white.

* Factory installed * Factory installation is strongly recommended.