

## Compact, multi-purpose heater

The OVS heater is designed for areas where space is limited. Four mounting positions are available (see picture below).

This high-efficiency heater is equipped with a silent axial fan that blows air over a durable tubular heating element with fins producing warm air circulation throughout the room.

The heater's clean lines and rounded corners will match perfectly with all interior styles.



hallway

basement

kitchen

bathroom

stairwell

## Features

- Color
  - Standard: white, almond.
  - Optional and custom colors available upon request.
- Finish
  - Standard: epoxy/polyester powder paint.
- Voltage
  - 120V, 208V, 240V/208V, 1-phase.
- Construction
  - 20-gauge steel.
  - High-limit temperature control with automatic reset.
- Fan
  - Quiet fan operating at 38 dBA (500W to 1000W; 40 cfm fan) and 41.3 dBA (1250W to 2000W; 80 cfm fan).
  - Factory-lubricated motor.
- Heating element
  - Durable tubular heating element with fins.
- Control
  - Built-in thermostat available with a control knob or tamperproof adjustable with a screwdriver.
- Installation
  - **The air outlet should be installed 10 in. (25.4 cm) above linoleum floor.**
  - Large wiring compartment.
  - May be recessed in 2 in. X 3 in. stud partitions.
  - Surface mounting box available.
  - Quick installation with recess box mounting holes.
  - Tight fit with V-shaped recess box.
- Warranty
  - 1-year warranty against defects.

## Standard Models



Product #	Volts	Watts	Weight	
			lbs	kg
OVSU0502	120	500	9.0	4.1
OVSU0752	120	750	9.0	4.1
OVSU1002	120	1000	9.0	4.1
OVSU1252	120	1250	9.0	4.1
OVSU1502	120	1500	9.0	4.1
OVSU0500	240/208	500/375	9.0	4.1
OVSU0750	240/208	750/563	9.0	4.1
OVSU1000	240/208	1000/750	9.0	4.1
OVSU1250	240/208	1250/938	9.0	4.1
OVSU1500	240/208	1500/1125	9.0	4.1
OVSU2000	240/208	2000/1500	9.0	4.1
OVSU2008	208	2000	9.0	4.1

Add "BL" for white, "AM" for almond.

## Accessories

Product #	Description
OVS-TB1	Single-pole thermostat kit 17A
OVS-TB1-AV	Single-pole tamperproof thermostat kit 17A
OVS-TB2	Double-pole thermostat kit 17A
OVS-TB2-AV	Double-pole tamperproof thermostat kit 17A
OVS-BS	Surface mounting box
OVS-DIS*	Disconnect switch 277V max. 20A

\* Factory installed

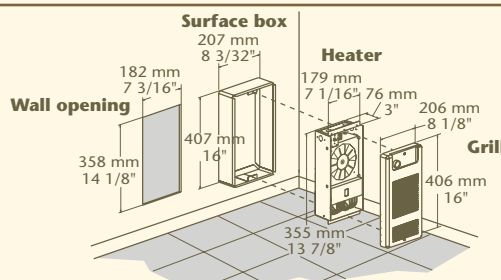

Four mounting positions available  
Pictures showing front panel.  
Directional vane air flow.

