

Type CPM Plug-In Loadcentres


Combination (Main Circuit Breaker) Three Phase Type 3R

4 Wire 120/208VAC Combination Service Entrance Type 3R ^④ ^⑤ (Outdoor/Raintight)

Product Selection

Table 4. Main Circuit Breaker Outdoor/Raintight Type 3R ^④ ^⑤ Loadcentres

Maximum Ampere Rating	Main Breaker Rating	Catalogue Number	Max. No. 1" Spaces	Max. No. 1/2" Spaces	Cover Style	Type of Main Breaker	Dimensions (in)			Wire Size Range for Main CU/AL
							H	W	D	
100 Amp	100 Amp	R3CPM112 ^⑥	12	24	Outdoor	BR ^⑦	20-3/4	14-3/8	5	#4 - 1/0
125 Amp	100 Amp	R3CPM130 ^⑥	30	60	Outdoor	CC ^⑧	38-3/4	14-3/8	3-3/4	#4 - 4/0
200 Amp	200 Amp	R3CPM230 ^⑥	30	60	Outdoor	CC ^⑧	38-3/4	14-3/8	3-3/4	#1-250MCM

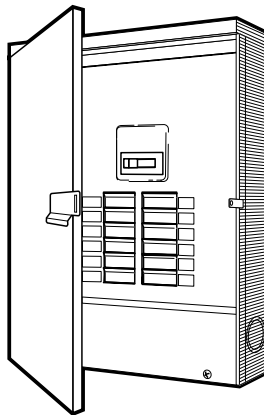

R3CPM230

- ④ Type BR-100 Amp 10kAIC Main Circuit Breaker is factory installed (BR3100).
- ⑤ High interrupting BRH breakers are available on page 13.
- ⑥ Factory installed 10 kAIC Main Breaker.
- ⑦ Outdoor Loadcentres accommodate Type DS conduit hubs. Hubs not included. See Page 11 for selection.
- ⑧ All enclosures include a locking hasp as an integral part of the door latching mechanism.