Heavy-duty industrial grade plugs & connectors



Safety grip hospital grade plugs & connectors features & benefits

Neoprene gasket seals around cord for added terminal protection from external elements

Dual range cord grip / provides positive cord gripping while limiting strain on conductors




Rugged nylon body resists impact and exposure to chemicals

Safety grip hospital grade devices exceed federal spec. and hospital grade testing for use in demanding healthcare environments



Retained quick drive assembly screws speed installation





Wiring chamber


Rating information

clearly marked on

face of device

Textured surface allows for easy grip and handling

Clear terminal cover allows for easy inspection of conductors and terminations





Tapered, individual wire pockets guide stranded wire into contact area for ease of installation




Multiple-head drive screws provide versatility for ease of use

Compliances, specifications and availability are subject to change without notice.

www.eaton.com/arrowhart




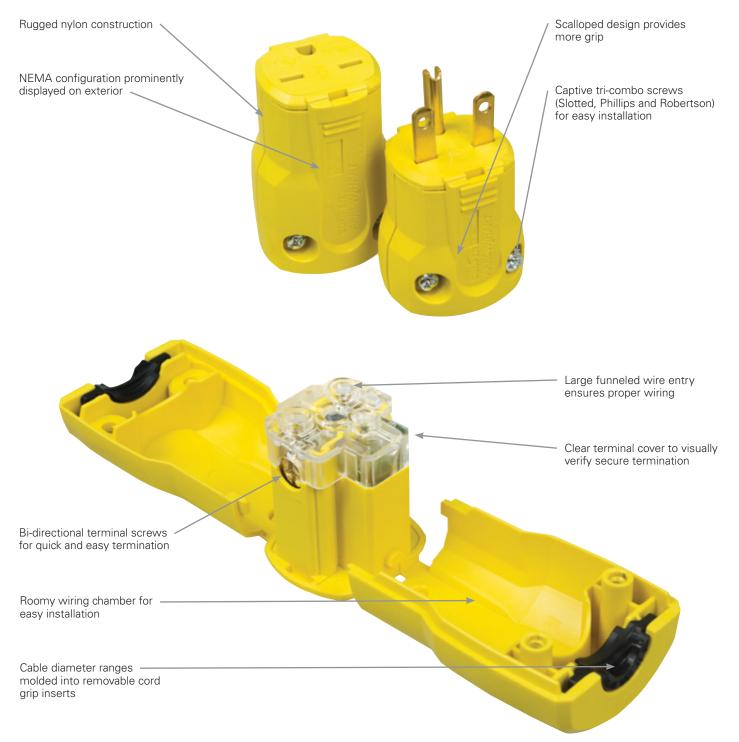

Quick grip hospital and industrial grade plugs & connectors features & benefits

Compliances, specifications and availability are subject to change without notice.

B-4

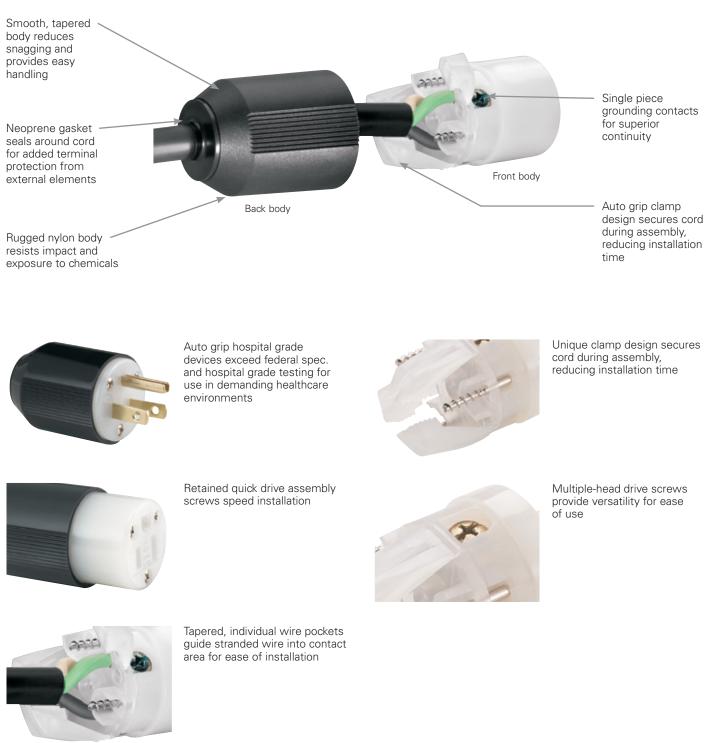


Auto grip hospital and industrial grade plugs & connectors features & benefits

Compliances, specifications and availability are subject to change without notice.





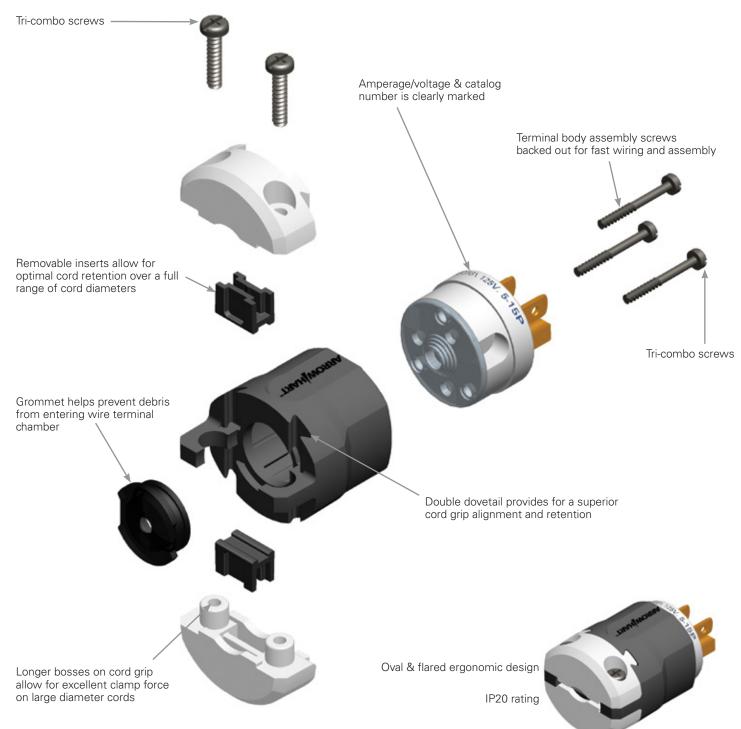

Arrow Hart industrial grade ultra grip straight blade plugs & connectors redesign

Compliances, specifications and availability are subject to change without notice.

Industrial grade plugs & connectors



Industrial grade plugs & connectors quick reference guide

AMP	V/AC	NEMA	Grip	Special	Body	Color	Page	Plug	Connector		
15	125	G	ULTRA		STR	BK & W	B-10	AH5266	AH5269		
					STR	BK	B-10	AH5266BK	AH5269BK		
		5-15P		HG	STR	BK & W	B-8	AH8215HG	AH8219HG		
		GG	SAFETY		ANG	BK & W	B-10	AH5266A	—		
				HG	ANG	BK & W	B-8	AH8215HGA	—		
		5-15R		HG	ANG	С	B-8	AH8215HGAC	—		
				HG	STR	С	B-8	AH8215HGC	AH8219HGC		
			QUICK		STR	BK	B-10	AH5965BK	AH5969BK		
					STR	Y	B-10	AH5965Y	AH5969Y		
				HG	STR	W	B-8	AH8115W	AH8119W		
			AUTO		STR	BK & W	B-10	5266N	5269N		
				HG	STR	BK & W	B-8	5266NHG	5269NHG		
				HG	STR	RN	B-8	IG5266NHG			
20	125	G G G G G G G G G G	ULTRA		STR	BK & W	B-11	AH5366	AH5369		
				HG	STR	BK & W	B-8	AH8315HG	AH8319HG		
			SAFETY	HG	ANG	BK & W	B-8	AH8315HGA	—		
		GU		HG	ANG	С	B-8	AH8315HGAC	—		
			QUICK		STR	BK	B-11	AH5364BK	AH5369BK		
		5-20R			STR	Y	B-11	AH5364Y	AH5369Y		
				HG	STR	BK & W	B-8	5366NHG	5369NHG		
15	250	6-15P	ULTRA		STR	BK & W	B-11	AH5666	AH5669		
			(フ		SAFETY	HG	ANG	BK & W	B-9	AH8225HGA	—
				HG	ANG	С	B-9	AH8225HGAC	—		
			QUICK		STR	BK	B-11	AH5666BK	AH5669BK		
					STR	Y	B-11	AH5666Y	AH5669Y		
			AUTO		STR	BK & W	B-11	5666N	5669N		
20	250	G	ULTRA		STR	BK & W	B-12	AH5466	AH5469		
			SAFETY	HG	ANG	BK & W	B-9	AH8325HGA	_		
		6-20P		HG	ANG	С	B-9	AH8325HGAC	—		
		GU	QUICK		STR	BK	B-12	AH5464BK	AH5469BK		
		Ŀ₽			STR	Y	B-12	AH5464Y	AH5469Y		
		6-20R	AUTO		STR	BK & W	B-12	5466N	5469N		

Hospital Grade

AMP	V/AC	NEMA	Color	Page	Flanged Inlet	Flanged Outlet
15	125	15-May	BK & W	B-10	AH5278C	AH5279C
			STEEL	B-10	AH5278	AH5246
20	125	20-May	BK & W	B-11	AH5778C	AH5779C
15	250	15-Jun	BK & W	B-11	AH5678C	AH5679C
20	250	20-Jun	BK & W	B-12	5878C	5879C

Compliances, specifications and availability are subject to change without notice.

Rating

Α 20 125

V/AC

Industrial grade straight blade devices

Product description

2-pole, 3-wire grounding 20A, 125V/AC **NEMA 5-20**

NEMA

5-20

Industrial grade plugs & connectors

Description

Ultra grip straight body

Quick grip straight body

Quick grip straight body

5-20P 5-	20R
	w P

Connector

catalog no

□ AH5369

□ AH5369BK

□ AH5369Y

5-20F

Plug

catalog no.

□ AH5366

□ AH5364BK

□ AH5364Y

. . .

Color

ΒK

Υ

BK & W





AH5778C



AH5666Y



Industrial grade dimensional Information: B-16-B17

Specification Information: Safety grip industrial plugs &

connectors: B-24 Quick grip plugs & connectors: B-24 Auto grip industrial plugs & connectors: B-24 Industrial flanged inlets & flanged outlets: B-25

c∰us F∰ S Industrial grade flanged inlets & outlets

Rating					Inlet	Outlet	
Α	V/AC	NEMA	Description	Color	catalog no.	catalog no.	E
20	125	5-20	Nylon construction, back wire	BK & W	□ AH5778C	□ AH5779C*	• •
* III listed only							

c (ΨL)us F (ΨL) S

diameter

0.33-0.66"

0.22-0.66"

(8.3-16.7mm)

(5.6-16.7mm) 0.22-0.66"

(5.6-16.7mm)

Cord

UL Listed only

Industrial grade straight blade devices

Product description

2-pole, 3-wire grounding 15A, 250V/AC NEMA 6-15

Industrial grade plugs & connectors	cUL us	F 🕕 S	<u>Nom</u> 426
-------------------------------------	--------	-------	-------------------

Ra A	nting V/AC	NEMA	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.	٩
15	250	6-15	Ultra grip straight body	0.33-0.66" (8.3-16.7mm)	BK & W	□ AH5666 ⁺	□ AH5669 ⁺	• •
			Quick grip straight body	0.22-0.66" (5.6-16.7mm)	BK, Y	□ AH5666 [†]	□ AH5669 [↑]	•
			Auto grip straight body	0.33-0.66" (8.3-16.7mm)	BK & W	□ 5666N	□ 5669N	• •

[†] Not NOM Spec

c(ΨL{us} F(ΨL)S Industrial grade flanged inlets & outlets

Ra	ating				Inlet	Outlet	
Α	V/AC	NEMA	Description	Color	catalog no.	catalog no.	
15	250	6-15	Nylon construction, back wire	BK & W	□ AH5678C	□ AH5679C*	• •
* III Listed only							

UL Listed only

Color information:

BK (Black), W (White), Y (Yellow)

ВK w

(Yellow) (Black) (White)

Compliances, specifications and availability are subject to change without notice.

늘 Indicates NAFTA compliant - Page Q-32

🔬 RoHS compliant - Page Q-32



 \checkmark